

A COMPANY OF LUPUS GROUP SINCE 1963



PROFESSIONAL LUBRICATION AND FUELING EQUIPMENT



ABOUT US

Wolflube; headquartered in Miami, Florida, was born in 2013.

Moreover, Wolflube is part of Lupus Group which was founded 56 years ago with presence in Europe, South America, and North America. We specialize in developing and producing solutions for lubrication, fueling, and DEF. Located in South Miami, with a factory in Italy, Wolflube has a large inventory to offer our customers a complete line of solutions in fluid handling technology. With very qualified personnel, Wolflube has many years of experience in developing and training customers and partners around the world.



In 1963 Mr. Lupo Panelli founded *Lupus Lubrificação e Abastecimento LTDA*, which years later would become a group composed of 3 lubrication companies. Mr. Panelli, first name "Lupo", comes from a Latin term meaning Wolf. Lupus is the plural of "Lupo", and it means Wolves, that's how and why he started his legacy in the lubrication equipment industry. Mr. Panelli's idea when he named his first company was, just like the Wolves, together we are stronger if we respect and follow principals such as team player concepts, respect, and loyalty.

OUR VISION

Vision

To be the leader in generating business value to our customers.

OUR MISSION

... for our Customer.

Striving to build long lasting relationships based on the values that we believe and equip our customers to tackle tough challenges.

... for our Employees.

Helping our employees to build a long lasting successful career based on values such as, respect to our Customers, integrity and professionalism.



WOLFLUBE HEADQUARTER
Wolflube headquarter located in the south of Miami.

LUPUS GROUP HEADQUARTER
Headquarter of Lupus Group located in São Paulo state.


FACTORY
Factory in Italy, where our products are manufactured.

MANUFACTURE SYSTEM





The new patented air-operated pumps, high quality, and heavy-duty reels fully designed and manufactured by WOLFLUBE, which shows remarkable operating features. It is fully assembled with electronic machine tools and parts are carefully tested to assure reliability and long life of the products. The choice of materials and manufacturing quality make our products suitable to work in the worst environmental conditions. High operating pressure products, low air consumption, reduced number of moving parts, electrolytic treatment to elevate to high corrosion strength and other features make our product line even more reliable and cost effective.

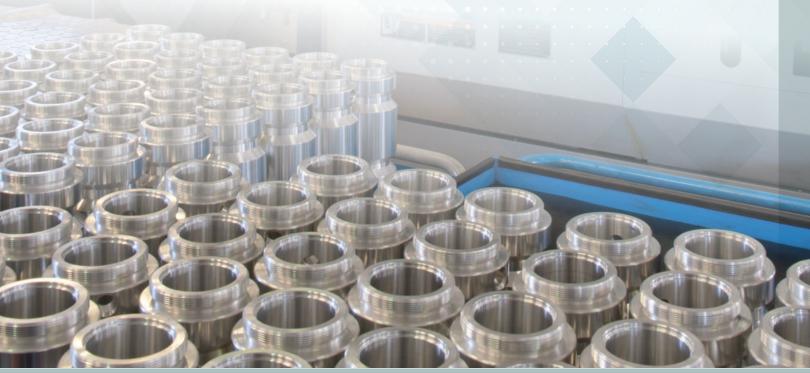







AIR OPERATED PUMPS

- PAGE 58 SINGLE ACTING PUMPS
- PAGE 64 DOUBLE ACTING PUMPS
- PAGE 76 INDUSTRIAL PUMPS
- PAGE 82 DIAPHRAGM PUMPS

OIL KITS

- PAGE 94 FRAME LIFTERS
- PAGE 96 KITS FOR TOTES
- PAGE 99 KITS FOR 55 GAL DRUMS
- PAGE 105 KITS FOR 16 GAL DRUMS

HOSE REELS AND HOSES

- PAGE 107 HOSE REELS 1/2"
- PAGE 108 HOSE REELS 3/4" AND 1"
- PAGE 110 ENCLOSED HOSE REELS
- PAGE 111 HOSES FOR REELS
- PAGE 112 CONNECTION HOSES

NOZZLES AND METERS

- PAGE 117 OIL NOZZLES / CONTROL HANDLE
- PAGE 122 OIL METERS

MANUAL PUMPS AND OIL DRAINERS

- PAGE 123 MANUAL PUMPS
- PAGE 132 OIL DRAINERS AIR OPERATED AND BY GRAVITY
- PAGE 141 OIL DRAINERS FOR PITS
- PAGE 142 OIL DRAINERS WHEELED UNITS

DISPENSERS AND STORAGE SYSTEMS

- PAGE 144 DISPENSERS AIR OPERATED
- PAGE 146 DISPENSERS MANUAL SYSTEM
- PAGE 149 DISPENSERS WIRELESS SYSTEM
- PAGE 151 DISPENSER BAR
- PAGE 156 TANKS
- PAGE 158 STORAGE SYSTEM

FILTRATION AND ACCESSORIES

- PAGE 160 OIL FILTERING UNIT
- PAGE 161 OIL FILTERING TROLLEY
- PAGE 163 TROLLEYS
- PAGE 168 BRACKETS
- PAGE 175 PLASTIC CONTAINERS AND FUNNELS
- PAGE 184 BUNG ADAPTERS, DOWN TUBES AND HOSE STOPS
- PAGE 187 FITTINGS



AIR OPERATED OIL PUMPS

The new patented air-operated oil pumps are fully designed and manufactured by WOLFLUBE, which show remarkable operating features. It is fully assembled with electronic machine tools, and the parts have been made with great care that has been carefully tested to assure reliability and long life of the product. The choice of materials and manufacturing quality make this pump suitable to work in the worst environmental conditions.

- Brand new motion reverse device completely air operated, without cams.
- · Reduced number of worn parts.
- High amount of delivered oil with low air requirement.
- High operating pressure.
- Aluminum alloy body pump with electrolytic treatment that ensures very high corrosion strength.
- High stressed elements in Fe 420 steel.










AIR OPERATED OIL PUMP 1:1 - STUB (WALL MOUNTING) FREE FLOW RATE 9.3 GPM

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Oil Transfer
- Farm/Agriculture

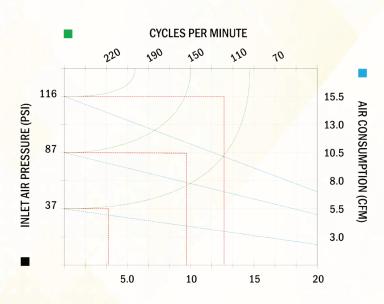

OUTLET OIL FREE FLOW RATE (GPM) (OIL 10W 30 - 68° F)

TECHNICAL DATA

250101



SUITABLE FOR:

SKU





PUMP RATIO	1:1		
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI		
AIR CONSUMPTION (87 PSI)	5 CFM		
AIR INLET	1/4" NPT(f)		
FLUID OUTLET	3/4" NPT(m)		
FREE FLOW RATE (87 PSI)	9.3 GPM		
NOISE	80 dB		
SEAL	Viton		
SHANK DIAMETER	1.97"		
SHANK LENGTH	9.84"		
FOR DRUMS (DRUM SIZE)	Stub pump		
WEIGHT	9 lbs		



These pumps are recommended for the use of transferring low viscosity oil (SAE 15/80), similar and antifreeze, for short distances (15 - 30 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

UMP

SE REELS

HOSES

METERS

PIIMPS


DISPENSERS

STURAGE &

GGESSORIES

AIR OPERATED OIL PUMP 1:1 - FOR 55 GAL DRUM FREE FLOW RATE 9.3 GPM



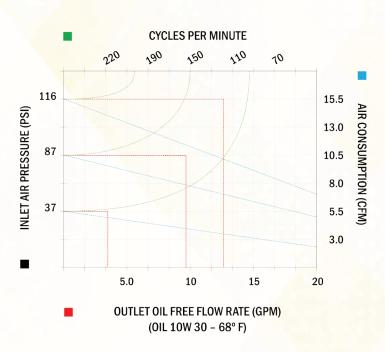

TECHNICAL DATA		
SKU	260059	
PUMP RATIO	1:1	
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI	
AIR CONSUMPTION (87 PSI)	5 CFM	
AIR INLET	1/4" NPT(f)	
FLUID OUTLET	3/4" NPT(m)	
FREE FLOW RATE (87 PSI)	9.3 GPM	
NOISE	80 dB	
SEAL	Viton	
SHANK DIAMETER	1.97"	
SHANK LENGTH	37"	
FOR DRUMS (DRUM SIZE)	55 Gal Drum	
WEIGHT	14 lbs	

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Oil Transfer
- · Farm/Agriculture



SUITABLE FOR:





antifreeze, for short distances (15 - 30 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

These pumps are recommended for the use of transferring low viscosity oil (SAE 15/80), similar and



AIR OPERATED OIL PUMP


1:1 - FOR 275 GAL TOTE

FREE FLOW RATE 10.6 GPM



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Oil Transfer
- Farm/Agriculture

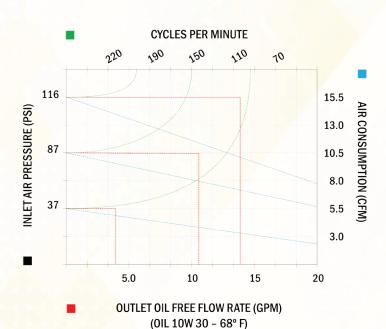

Ø 2.17	11.81
Ø 1.97	49.21

SUITABLE FOR:





TECHNICA	L DATA		
SKU	260068		
PUMP RATIO	1:1		
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI		
AIR CONSUMPTION (87 PSI)	5.7 CFM		
AIR INLET	1/4" NPT(f)		
FLUID OUTLET	3/4" NPT(m)		
FREE FLOW RATE (87 PSI)	10.6 GPM		
NOISE	80 dB		
SEAL	Polyurethane		
SHANK DIAMETER	1.97"		
SHANK LENGTH	49.21"		
FOR DRUMS (DRUM SIZE)	275 Gal Tote		
WEIGHT	15 lbs		

260068

These pumps are recommended for the use of transferring low viscosity oil (SAE 15/80), similar and antifreeze, for short distances (15 - 30 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

UMP

XIIX

HOSE REELS

HOSES

METERS

PIIMPS


DISPENSERS

STURAGE &

PLESSORIES

AIR OPERATED OIL PUMP 3:1-STUB (WALL MOUNTING) FREE FLOW RATE 6.6 GPM




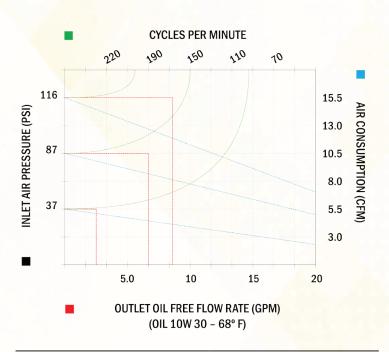

SKU	251901
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	6.6 GPM
NOISE	80 dB
SEAL	Viton
SHANK DIAMETER	1.65"
SHANK LENGTH	8.46"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	9 lbs

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR:





and antifreeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), similar

The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recomusing filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.






AIR OPERATED OIL PUMP **3:1-FOR 16 GAL DRUM** FREE FLOW RATE 6.6 GPM

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture

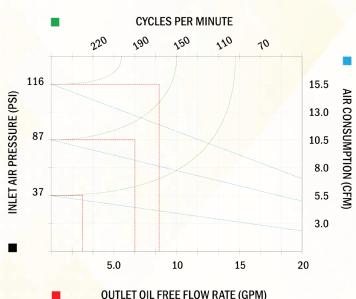

OUTLET OIL FREE FLOW RATE (GPM)
(OIL 10W 30 - 68° F)

SUITABLE FOR:






TECHNICA	L DATA
SKU	260026
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	6.6 GPM
NOISE	80 dB
SEAL	Viton
SHANK DIAMETER	1.65"
SHANK LENGTH	29.15"
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	12 lbs

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), similar and antifreeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to the applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

AIR OPERATED OIL PUMP 3:1-FOR 55 GAL DRUM FREE FLOW RATE 6.6 GPM



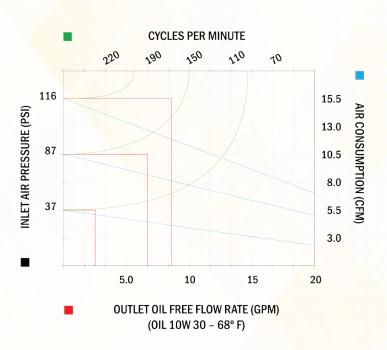

TECHNICA	L DATA
SKU	251902
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	6.6 GPM
NOISE	80 dB
SEAL	Viton
SHANK DIAMETER	1.65"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	13 lbs

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), similar and antifreeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies

the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used.

using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR:





according to the applications and combinations, the pressure of air supplied, viscosity and temperature of The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. We recommend




AIR OPERATED OIL PUMP 3:1-DOUBLE-ACTING

STUB (WALL MOUNTING)


FREE FLOW RATE 7.9 GPM

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture

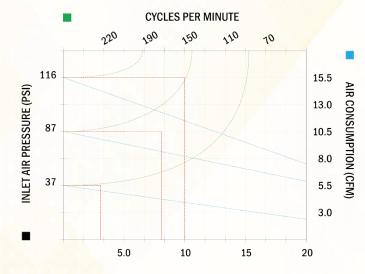

OUTLET OIL FREE FLOW RATE (GPM) (OIL 10W 30 - 68° F)



SUITABLE FOR:






TECHNICA	L DATA
SKU	260048
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5.7 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	7.9 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	8.45"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	12 lbs



These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), and anti-freeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

AIR OPERATED OIL PUMP 3:1-DOUBLE-ACTING FOR 55 GAL DRUM FREE FLOW RATE 7.9 GPM



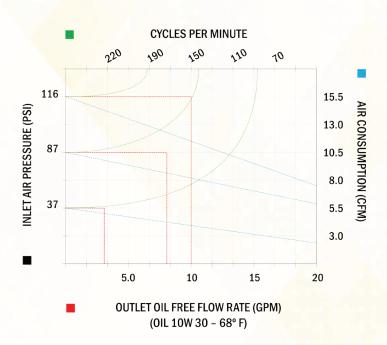

TECHNICA	L DATA
SKU	260031
PUMP RATIO	3:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	5.7 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	7.9 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	17 lbs

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR:





These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), and anti-freeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.



AIR OPERATED OIL PUMP 3:1-DOUBLE-ACTING FOR 275 GAL TOTE

FREE FLOW RATE 7.9 GPM



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR:





116		20	20	-0	.0			
13.0 10.5 8.0 5.5	+	220	790	150	770	10		
							15.5	
	KE (PS)						13.0	
	87				/		10.5	
	XX Y			\rightarrow			8.0	
3.0	37						5.5	
							3.0	

OUTLET OIL FREE FLOW RATE (GPM) (OIL 10W 30 - 68° F)

SKU SKU	260050		
PUMP RATIO	3:1		
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI		
AIR CONSUMPTION (87 PSI)	5.7 CFM		
AIR INLET	1/4" NPT(f)		
FLUID OUTLET	1/2" NPT(m)		
FREE FLOW RATE (87 PSI)	7.9 GPM		
NOISE	80 dB		
SEAL	Polyurethane		
SHANK DIAMETER	1.65"		
SHANK LENGTH	49.21"		
FOR DRUMS (DRUM SIZE)	275 Gal Tote		
WEIGHT	19 lbs		

anti-freeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities.

pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), and

UMP


SHIM SHIM

HOSE REELS

HOSES

AIR OPERATED OIL PUMP 3:1-DOUBLE-ACTING-HIGH DELIVERY STUB (WALL MOUNTING) FREE FLOW RATE 10.6 GPM




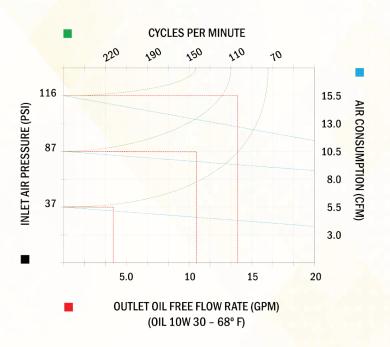

TECHNICAL DATA		
SKU	260038	
PUMP RATIO	3:1	
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI	
AIR CONSUMPTION (87 PSI)	9 CFM	
AIR INLET	3/8" NPT(f)	
FLUID OUTLET	3/4" NPT(m)	
FREE FLOW RATE (87 PSI)	10.6 GPM	
NOISE	80 dB	
SEAL	Polyurethane	
SHANK DIAMETER	1.97"	
SHANK LENGTH	8.66"	
FOR DRUMS (DRUM SIZE)	Stub pump	
WEIGHT	22 lbs	

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR:





anti-freeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities.

We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), and




AIR OPERATED OIL PUMP 3:1 - DOUBLE-ACTING - HIGH DELIVERY FOR 55 GAL DRUM FREE FLOW RATE 10.6 GPM




Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture

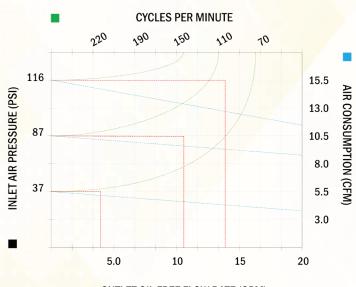

OUTLET OIL FREE FLOW RATE (GPM) (OIL 10W 30 - 68° F)



SUITABLE FOR:





TECHNICAL DATA		
260029		
3:1		
37 PSI to 116 PSI		
9 CFM		
3/8" NPT(f)		
3/4" NPT(m)		
10.6 GPM		
80 dB		
Polyurethane		
1.97"		
37"		
55 Gal Drum		
27 lbs		

These pumps are recommended for the use of transferring low to medium viscosity oil (SAE 15/130), and anti-freeze, for short through medium distances (130 - 160 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

UMP


ZITC

HOSE REELS

HOSES

AIR OPERATED OIL PUMP 5:1-DOUBLE-ACTING STUB (WALL MOUNTING) FREE FLOW RATE 7.4 GPM




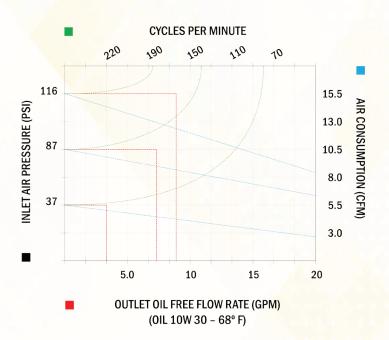

TECHNICA	L DATA
SKU	251903
PUMP RATIO	5:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	6.6 CFM
AIR INLET	1/4" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	7.4 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.65"
SHANK LENGTH	8.46"
FOR DRUMS (DRUM SIZE)	Stub pump
WEIGHT	17 lbs

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR:





These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240), and anti-freeze, for medium through long distances (492 - 787 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.






AIR OPERATED OIL PUMP 5:1-DOUBLE-ACTING

FOR 16 GAL DRUM

FREE FLOW RATE 7.4 GPM

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture

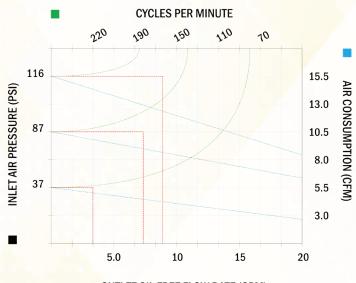

OUTLET OIL FREE FLOW RATE (GPM)
(OIL 10W 30 - 68° F)

Ø 2.95 01.65

SUITABLE FOR:





TECHNICAL DATA		
SKU	260024	
PUMP RATIO	5:1	
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI	
AIR CONSUMPTION (87 PSI)	6.6 CFM	
AIR INLET	1/4" NPT(f)	
FLUID OUTLET	1/2" NPT(m)	
FREE FLOW RATE (87 PSI)	7.4 GPM	
NOISE	80 dB	
SEAL	Polyurethane	
SHANK DIAMETER	1.65"	
SHANK LENGTH	29.10"	
FOR DRUMS (DRUM SIZE)	16 Gal Drum	
WEIGHT	16 lbs	

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240), and anti-freeze, for medium through long distances (492 - 787 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

PUMP

SE REELS


HOSES

METERS

UMPS

AIR OPERATED OIL PUMP 5:1 - DOUBLE-ACTING FOR 55 GAL DRUM FREE FLOW RATE 7.4 GPM




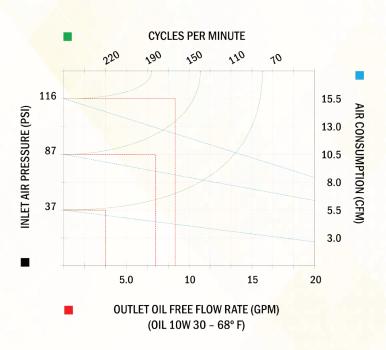

TECHNICAL DATA		
SKU	251904	
PUMP RATIO	5:1	
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI	
AIR CONSUMPTION (87 PSI)	6.6 CFM	
AIR INLET	1/4" NPT(f)	
FLUID OUTLET	1/2" NPT(m)	
FREE FLOW RATE (87 PSI)	7.4 GPM	
NOISE	80 dB	
SEAL	Polyurethane	
SHANK DIAMETER	1.65"	
SHANK LENGTH	37"	
FOR DRUMS (DRUM SIZE)	55 Gal Drum	
WEIGHT	17 lbs	

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR:





anti-freeze, for medium through long distances (492 - 787 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities.

We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240), and




AIR OPERATED OIL PUMP

5:1 - DOUBLE-ACTING FOR 275 GAL TOTE


FREE FLOW RATE 7.4 GPM

Typical Applications • Automotive dealerships

- Hoavy duty doalorchine
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture

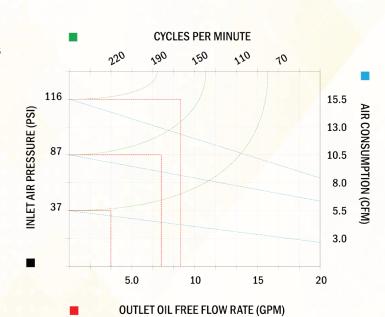

(OIL 10W 30 - 68° F)



SUITABLE FOR:





TECHNICAL DATA		
SKU	250107	
PUMP RATIO	5:1	
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI	
AIR CONSUMPTION (87 PSI)	6.6 CFM	
AIR INLET	1/4" NPT(f)	
FLUID OUTLET	1/2" NPT(m)	
FREE FLOW RATE (87 PSI)	7.4 GPM	
NOISE	80 dB	
SEAL	Polyurethane	
SHANK DIAMETER	1.65"	
SHANK LENGTH	49.21"	
FOR DRUMS (DRUM SIZE)	275 Gal Tote	
WEIGHT	20 lbs	

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240), and anti-freeze, for medium through long distances (492 - 787 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

PUMP


SE REELS

HOSES

METERS

AIR OPERATED OIL PUMP 5:1-DOUBLE-ACTING-HIGH DELIVERY STUB (WALL MOUNTING) FREE FLOW RATE 9.3 GPM




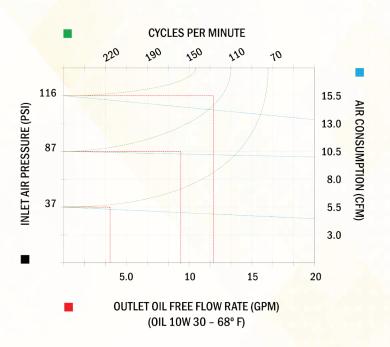

TECHNICAL DATA		
SKU	250108	
PUMP RATIO	5:1	
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI	
AIR CONSUMPTION (87 PSI)	10.2 CFM	
AIR INLET	3/8" NPT(f)	
FLUID OUTLET	3/4" NPT(m)	
FREE FLOW RATE (87 PSI)	9.3 GPM	
NOISE	80 dB	
SEAL	Polyurethane	
SHANK DIAMETER	1.65"	
SHANK LENGTH	8.66"	
FOR DRUMS (DRUM SIZE)	Stub pump	
WEIGHT	22 lbs	

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR:





anti-freeze, for medium through long distances (490 - 655 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities.

We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240) and






OLFLURE

AIR OPERATED OIL PUMP 5:1 - DOUBLE-ACTING - HIGH DELIVERY FOR 55 GAL DRUM FREE FLOW RATE 9.3 GPM



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture

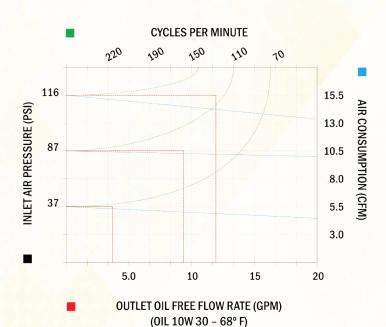

Ø.	2.95	The street	•	16.54
Ø.	1.65	19	•	37.00

SUITABLE FOR:






TECHNICAL DATA		
SKU	250109	
PUMP RATIO	5:1	
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI	
AIR CONSUMPTION (87 PSI)	10.2 CFM	
AIR INLET	3/8" NPT(f)	
FLUID OUTLET	3/4" NPT(m)	
FREE FLOW RATE (87 PSI)	9.3 GPM	
NOISE	80 dB	
SEAL	Polyurethane	
SHANK DIAMETER	1.65"	
SHANK LENGTH	37"	
FOR DRUMS (DRUM SIZE)	55 Gal Drum	
WEIGHT	23 lbs	



These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240) and anti-freeze, for medium through long distances (490 - 655 ft). The delivery capacity of a pump varies according to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

AIR OPERATED OIL PUMP 5:1 - DOUBLE-ACTING - HIGH DELIVERY FOR 275 GAL TOTE

FREE FLOW RATE 9.3 GPM

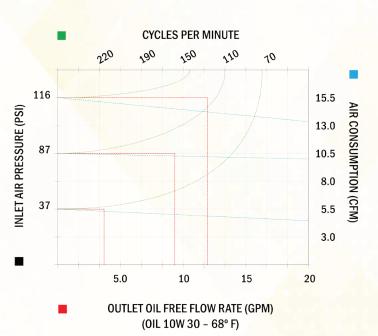


TECHNICAL DATA		
SKU	250110	
PUMP RATIO	5:1	
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI	
AIR CONSUMPTION (87 PSI)	10.2 CFM	
AIR INLET	3/8" NPT(f)	
FLUID OUTLET	3/4" NPT(m)	
FREE FLOW RATE (87 PSI)	9.3 GPM	
NOISE	80 dB	
SEAL	Polyurethane	
SHANK DIAMETER	1.65"	
SHANK LENGTH	49.21"	
FOR DRUMS (DRUM SIZE)	275 Gal Tote	
WEIGHT	27 lbs	

These pumps are recommended for the use of transferring medium to high viscosity oil (SAE 15/240) and anti-freeze, for medium through long distances (490 - 655 ft). The delivery capacity of a pump varies according

We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture



SUITABLE FOR:





to applications and combinations, the pressure of air supplied, viscosity and temperature of the fluid, dimensions of delivery hose, dimensions of connections and the type of gun which is used. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated oil pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities.






INDUSTRIAL AIR OPERATED OIL PUMP


8:1 - STUB (WALL MOUNTING) FREE FLOW RATE 9.3 GPM

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining

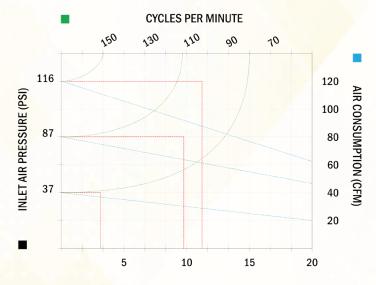

OUTLET OIL FREE FLOW RATE (GPM) (OIL 10W 30 - 68° F)



SUITABLE FOR:





TECHNICAL DATA		
SKU	250106	
PUMP RATIO	8:1	
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI	
AIR CONSUMPTION (87 PSI)	46 CFM	
AIR INLET	1/2" NPT(f)	
FLUID OUTLET	3/4" NPT(m)	
FREE FLOW RATE (87 PSI)	9.3 GPM	
NOISE	80 dB	
SEAL	Polyurethane	
SHANK DIAMETER	1.97"	
SHANK LENGTH	8.66"	
FOR DRUMS (DRUM SIZE)	Stub pump	
WEIGHT	31 lbs	

250106


These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. The delivery capacity of a pump varies according to applications and combinations. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

INDUSTRIAL AIR OPERATED








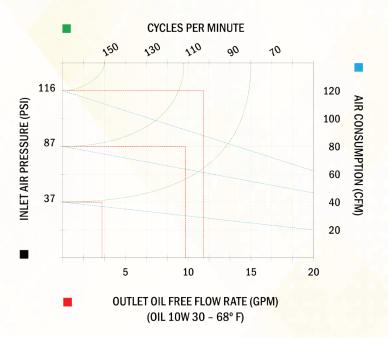

TECHNICA	L DATA
SKU	250111
PUMP RATIO	8:1
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	46 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	3/4" NPT(m)
FREE FLOW RATE (87 PSI)	9.3 GPM
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.97"
SHANK LENGTH	37"
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	36 lbs

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining





SUITABLE FOR:





These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. The delivery capacity of a pump varies according to applications and combinations. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.








INDUSTRIAL AIR OPERATED OIL PUMP

8:1-FOR 275 GAL TOTE FREE FLOW RATE 9.3 GPM



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining



SUITABLE FOR:





				CYC	LES PER N	/INUTE			
			150	130	110	90	10		
(is	116	<						120	AIF
RE (P.								100	CON
ESSU	87							80	MUS
INLET AIR PRESSURE (PSI)	-							60	AIR CONSUMPTION (CFM)
NLET,	37							40	(CFM)
_								20	
•	* * -		5		10	1!	5	20	
			J		10	1.	,	20	

OUTLET OIL FREE FLOW RATE (GPM)
(OIL 10W 30 – 68° F)

TECHNICAL DATA				
SKU	250112			
PUMP RATIO	8:1			
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI			
AIR CONSUMPTION (87 PSI)	46 CFM			
AIR INLET	1/2" NPT(f)			
FLUID OUTLET	3/4" NPT(m)			
FREE FLOW RATE (87 PSI)	9.3 GPM			
NOISE	80 dB			
SEAL	Polyurethane			
SHANK DIAMETER	1.97"			
SHANK LENGTH	8.66"			
FOR DRUMS (DRUM SIZE)	275 Gal Tote			
WEIGHT	38 lbs			


250112

These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. The delivery capacity of a pump varies according to applications and combinations. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

OIL PUMP

10:1-STUB (WALL MOUNTING) FREE FLOW RATE 11.9 GPM


INDUSTRIAL AIR OPERATED

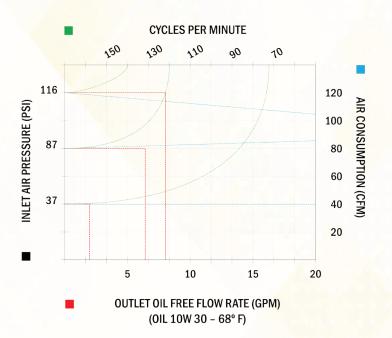

TECHNICAL DATA				
SKU	251905			
PUMP RATIO	10:1			
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI			
AIR CONSUMPTION (87 PSI)	86 CFM			
AIR INLET	1/2" NPT(f)			
FLUID OUTLET	3/4" NPT(m)			
FREE FLOW RATE (87 PSI)	11.9 GPM			
NOISE	80 dB			
SEAL	Polyurethane			
SHANK DIAMETER	1.77"			
SHANK LENGTH	8.66"			
FOR DRUMS (DRUM SIZE)	Stub pump			
WEIGHT	36 lbs			

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining



SUITABLE FOR:





251905



These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. The delivery capacity of a pump varies according to applications and combinations. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for

installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.




INDUSTRIAL AIR OPERATED OIL PUMP

12:1 - FOR 55 GAL DRUM FREE FLOW RATE 7.9 GPM



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining



SUITABLE FOR:





			CYCL	ES PER N	IINUTE			
		150	130	110	90	10		
	116						120	0 <u>≜</u>
E (PS							100	R CO
SSUR	87						8	NUSI
INLET AIR PRESSURE (PSI)							6	AIR CONSUMPTION (CFM)
LET.	37	 -					41	(CFM)
=							20	
		5		10	15	•	20	

OUTLET OIL FREE FLOW RATE (GPM)
(OIL 10W 30 – 68° F)

TECHNICAL DATA				
SKU	260103			
PUMP RATIO	12:1			
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI			
AIR CONSUMPTION (87 PSI)	46 CFM			
AIR INLET	1/2" NPT(f)			
FLUID OUTLET	3/4" NPT(m)			
FREE FLOW RATE (87 PSI)	7.9 GPM			
NOISE	80 dB			
SEAL	Polyurethane			
SHANK DIAMETER	1.65"			
SHANK LENGTH	37"			
FOR DRUMS (DRUM SIZE)	55 Gal Drum			
WEIGHT	35 lbs			


260103

These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium through long distances. Also, suitable for the transfer of medium through high viscosity grease. The delivery capacity of a pump varies according to applications and combinations. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

INDUSTRIAL AIR OPERATED **OIL PUMP**

20:1-FOR 55 GAL DRUM FREE FLOW RATE 6.4 GPM




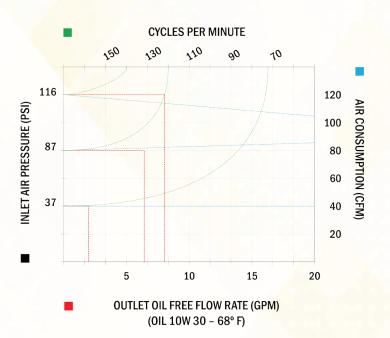

TECHNICAL DATA				
SKU	251920			
PUMP RATIO	20:1			
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI			
AIR CONSUMPTION (87 PSI)	86 CFM			
AIR INLET	1/2" NPT(f)			
FLUID OUTLET	3/4" NPT(m)			
FREE FLOW RATE (87 PSI)	6.4 GPM			
NOISE	80 dB			
SEAL	Polyurethane			
SHANK DIAMETER	1.65"			
SHANK LENGTH	37"			
FOR DRUMS (DRUM SIZE)	55 Gal Drum			
WEIGHT	36 lbs			

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Oil transfer
- Industrial application
- Mining



SUITABLE FOR:





through long distances. Also, suitable for the transfer of medium through high viscosity grease. The delivery capacity of a pump varies according to applications and combinations. The operating pressure may vary between a minimum of 37 PSI and a maximum of 116 PSI. The double-acting air operated pump ensures the delivery of a continuous and constant flow, suitable for installations on distribution facilities. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

These pumps are recommended for the use of transferring low to high viscosity oil and similar for medium






OLFLURE

DIAPHRAGM PUMP ALUMINUM - 1/2" FREE FLOW RATE 14.5 GPM



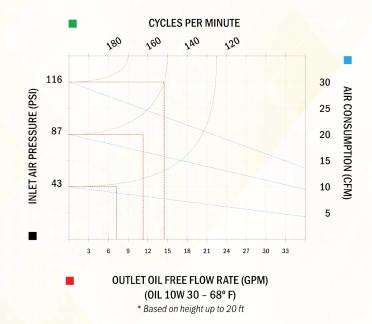



 $\langle \epsilon_x \rangle$

<mark>EX II 3/3 GD c</mark> IIB T 275Fº ATEX zone 2

231201







Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers


- Service shops
- Farm/Agriculture
- Fleet service facilities
- · Heavy-duty dealerships
- Mining

TECHNICAL DATA					
SKU	<mark>23120</mark> 1	MAX. VISCOSITY	20.000 CPS		
PUMP RATIO	1:1	MAX. SOLID PASSING	1/8"		
FLUID INLET	1/2" NPT(f)	MAX. TEMP. WORKING	149° F		
FLUID OUTLET	1/2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft		
AIR INLET	1/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft		
FREE FLOW RATE (116 PSI)	14.5 GPM	MAX. SUCTION LIFT - WET	32.15 ft		
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316		
AIR CONSUMPTION (116 PSI)	13 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE		
NOISE	68 dB	WEIGHT	11 lbs		

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

DIAPHRAGM PUMP ALUMINUM - 3/4" FREE FLOW RATE 29 GPM



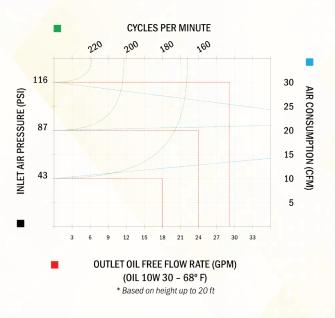



EX II 3/3 GD c IIB T 275F° ATEX zone 2


233401


Typical Applications

- Automotive dealerships
- Lube trucks
- · Industrial application
- Oil transfer
- Fast lube centers

- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining







TECHNICAL DATA

I ECHNICAL DATA					
233401	MAX. VISCOSITY	25.000 CPS			
1:1	MAX. SOLID PASSING	1/8"			
3/4" NPT(f)	MAX. TEMP. WORKING	149° F			
3/4" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft			
3/8" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft			
29 GPM	MAX. SUCTION LIFT - WET	32.15 ft			
29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316			
24 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE			
72 dB	WEIGHT	16 lbs			
	233401 1:1 3/4" NPT(f) 3/4" NPT(f) 3/8" NPT(f) 29 GPM 29 PSI to 116 PSI 24 CFM	233401 MAX. VISCOSITY 1:1 MAX. SOLID PASSING 3/4" NPT(f) MAX. TEMP. WORKING 3/4" NPT(f) MAX. DELIVERY. HEIGHT 3/8" NPT(f) MAX. SUCTION LIFT - DRY 29 GPM MAX. SUCTION LIFT - WET 29 PSI to 116 PSI BALL MATERIAL 24 CFM DIAPHRAGM MATERIAL			


These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.



OLFLURE

DIAPHRAGM PUMP ALUMINUM - 1" FREE FLOW RATE 45 GPM



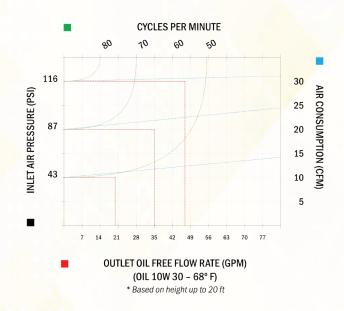





<mark>EX II 3/3 GD c</mark> IIB T 275Fº ATEX zone 2

231001







Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers


- Service shops
- Farm/Agriculture
- · Fleet service facilities
- · Heavy-duty dealerships
- Mining

TECHNICAL DATA					
SKU	<mark>23100</mark> 1	MAX. VISCOSITY	35.000 CPS		
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"		
FLUID INLET	1" NPT(f)	MAX. TEMP. WORKING	149° F		
FLUID OUTLET	1" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft		
AIR INLET	1/2" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft		
FREE FLOW RATE (116 PSI)	45 GPM	MAX. SUCTION LIFT - WET	32.15 ft		
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316		
AIR CONSUMPTION (116 PSI)	31 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE		
NOISE	75 dB	WEIGHT	36 lbs		

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

DIAPHRAGM PUMP ALUMINUM - 1.1/4" FREE FLOW RATE 66 GPM



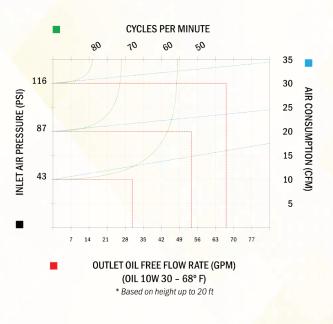





EX II 3/3 GD c IIB T 275F° ATEX zone 2


231141


Typical Applications

- Automotive dealerships
- Lube trucks
- · Industrial application
- Oil transfer
- Fast lube centers

- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining







TECHNICAL DATA

TEOHINICAL DATA				
SKU	231141	MAX. VISCOSITY	35.000 CPS	
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"	
FLUID INLET	1.1/4" NPT(f)	MAX. TEMP. WORKING	149° F	
FLUID OUTLET	1.1/4" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft	
AIR INLET	1/2" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft	
FREE FLOW RATE (116 PSI)	66 GPM	MAX. SUCTION LIFT - WET	32.15 ft	
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316	
AIR CONSUMPTION (116 PSI)	35 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE	
NOISE	75 dB	WEIGHT	36 lbs	


These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.



OLFLUZE

DIAPHRAGM PUMP ALUMINUM - 1.1/2" FREE FLOW RATE 105 GPM



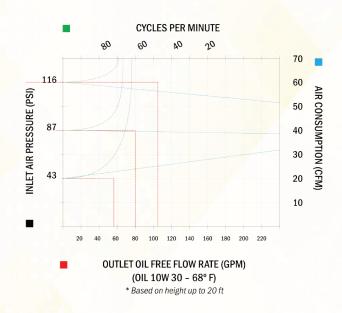





<mark>EX II 3/3 GD c</mark> IIB T 275Fº ATEX zone 2

231121







Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers


- Service shops
- Farm/Agriculture
- · Fleet service facilities
- · Heavy-duty dealerships
- Mining

TECHNICAL DATA					
SKU	231121	MAX. VISCOSITY	50.000 CPS		
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"		
FLUID INLET	1.1/2" NPT(f)	MAX. TEMP. WORKING	149° F		
FLUID OUTLET	1.1/2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft		
AIR INLET	3/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft		
FREE FLOW RATE (116 PSI)	105 GPM	MAX. SUCTION LIFT - WET	32.15 ft		
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316		
AIR CONSUMPTION (116 PSI)	52 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE		
NOISE	78 dB	WEIGHT	49 lbs		

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

DIAPHRAGM PUMP **ALUMINUM - 2"** FREE FLOW RATE 185 GPM



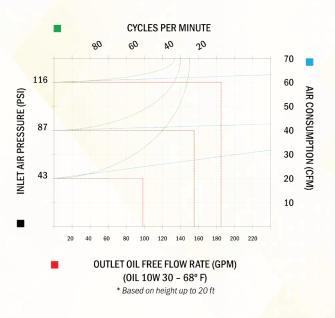





EX II 3/3 GD c IIB T 275F° ATEX zone 2


232001


Typical Applications

- Automotive dealerships
- · Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers

- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining







TECHNICAL DATA

232001	MAX. VISCOSITY	50.000 CPS
1:1	MAX. SOLID PASSING	5/16"
2" NPT(f)	MAX. TEMP. WORKING	149° F
2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
3/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
185 GPM	MAX. SUCTION LIFT - WET	32.15 ft
29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
65 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE
78 dB	WEIGHT	80 lbs
	2" NPT(f) 2" NPT(f) 3/4" NPT(f) 185 GPM 29 PSI to 116 PSI 65 CFM	2" NPT(f) MAX. TEMP. WORKING 2" NPT(f) MAX. DELIVERY. HEIGHT 3/4" NPT(f) MAX. SUCTION LIFT - DRY 185 GPM MAX. SUCTION LIFT - WET 29 PSI to 116 PSI BALL MATERIAL 65 CFM DIAPHRAGM MATERIAL


These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.



OLFLURE

DIAPHRAGM PUMP POLYPROPYLENE - 1/2" FREE FLOW RATE 14.5 GPM



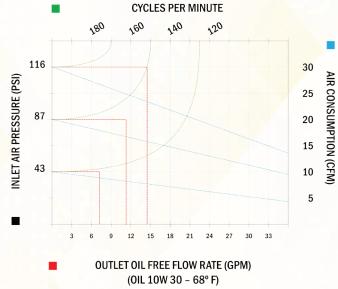


* Based on height up to 20 ft




EX II 3/3 GD c IIB T 275F° ATEX zone 2

221205







Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers


- Service shops
- Farm/Agriculture
- Fleet service facilities
- · Heavy-duty dealerships
- Mining

TECHNICAL DATA			
SKU	<mark>22120</mark> 5	MAX. VISCOSITY	20.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	1/8"
FLUID INLET	1/2" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1/2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	1/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	14.5 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	29 PSI to 116 PSI	DIAPHRAGM MATERIAL	Hytrel + PTFE
NOISE	68 dB	WEIGHT	10 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

DIAPHRAGM PUMP POLYPROPYLENE - 3/4" FREE FLOW RATE 29 GPM



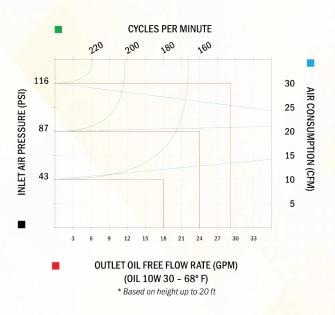



EX II 3/3 GD c IIB T 275F° ATEX zone 2


223401


Typical Applications

- Automotive dealerships
- Lube trucks
- · Industrial application
- Oil transfer
- Fast lube centers

- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining







TECHNICAL DATA

SKU	223401	MAX. VISCOSITY	25.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	1/8"
FLUID INLET	3/4" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	3/4" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	3/8" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	29 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	24 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE
NOISE	72 dB	WEIGHT	16 lbs


These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.



OLFLURE

DIAPHRAGM PUMP POLYPROPYLENE - 1" FREE FLOW RATE 45 GPM



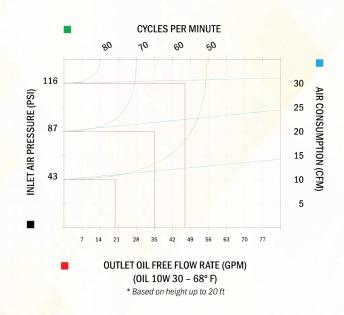



 $\langle \epsilon_x \rangle$

EX II 3/3 GD c IIB T 275F° ATEX zone 2

221001







Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers


- Service shops
- Farm/Agriculture
- · Fleet service facilities
- · Heavy-duty dealerships
- Mining

TECHNICAL DATA			
SKU	<mark>22100</mark> 1	MAX. VISCOSITY	35.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"
FLUID INLET	1" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	1/2" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	45 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	31 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE
NOISE	75 dB	WEIGHT	36 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

DIAPHRAGM PUMP POLYPROPYLENE - 1.1/4" FREE FLOW RATE 66 GPM



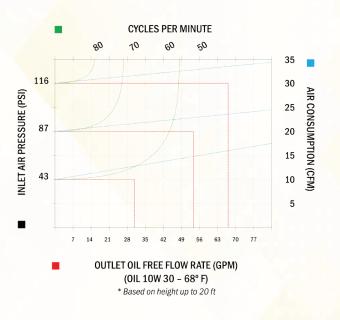





EX II 3/3 GD c IIB T 275F° ATEX zone 2

221141

Typical Applications

- Automotive dealerships
- Lube trucks
- · Industrial application
- Oil transfer


NOISE

Fast lube centers


- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining

75 dB





36 lbs



SKU	221141	MAX. VISCOSITY	35.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"
FLUID INLET	1.1/4" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1.1/4" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	1/2" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	66 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	35 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE

TECHNICAL DATA

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.


WEIGHT



OLFLURE

DIAPHRAGM PUMP POLYPROPYLENE - 1.1/2" FREE FLOW RATE 105 GPM



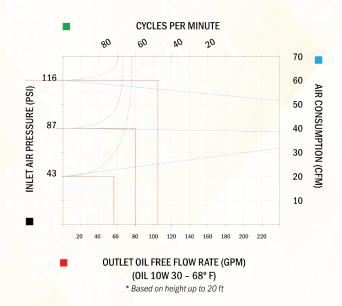





EX II 3/3 GD c IIB T 275F° ATEX zone 2

221121







Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers


- Service shops
- Farm/Agriculture
- · Fleet service facilities
- · Heavy-duty dealerships
- Mining

TECHNICAL DATA			
SKU	<mark>22112</mark> 1	MAX. VISCOSITY	50.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"
FLUID INLET	1.1/2" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	1.1/2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	3/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	105 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	52 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE
NOISE	78 dB	WEIGHT	49 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.

DIAPHRAGM PUMP **POLYPROPYLENE - 2"** FREE FLOW RATE 185 GPM



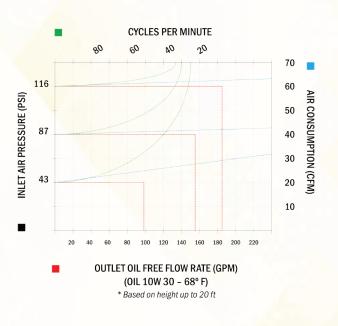





EX II 3/3 GD c IIB T 275F° ATEX zone 2


222001


Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- · Fast lube centers

- Service shops
- Farm/Agriculture
- Fleet service facilities
- Heavy-duty dealerships
- Mining







IECHNIC	AL DAIA	
	MAY WOOO	_

I EOIINICAL DAIA			
SKU	222001	MAX. VISCOSITY	50.000 CPS
PUMP RATIO	1:1	MAX. SOLID PASSING	5/16"
FLUID INLET	2" NPT(f)	MAX. TEMP. WORKING	149° F
FLUID OUTLET	2" NPT(f)	MAX. DELIVERY. HEIGHT	262.5 ft
AIR INLET	3/4" NPT(f)	MAX. SUCTION LIFT - DRY	19.7 ft
FREE FLOW RATE (116 PSI)	185 GPM	MAX. SUCTION LIFT - WET	32.15 ft
AIR WORKING PRESSURE (RANGE)	29 PSI to 116 PSI	BALL MATERIAL	SS AISI 316
AIR CONSUMPTION (116 PSI)	65 CFM	DIAPHRAGM MATERIAL	Hytrel + PTFE
NOISE	78 dB	WEIGHT	80 lbs

These pumps are recommended for the use of transferring low to high viscosity oil and similar for short through medium distances. The delivery capacity of a pump varies according to applications and combinations.



OIL KIT - RAM - FRAME LIFTER 20:1 - FOR 55 GAL DRUM FREE FLOW RATE 6.4 GPM


SUITABLE FOR:

Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Farm/Agriculture
- Mining

- Industrial application
- · Service shops
- · Fleet service facilities
- · Grease transfer





Air operated two column pump lifter and press for oil and other fluids.

Its 3 way control valve lifts or pulls down the pump and the follower plate, improving the exchanging effort of the 55 gal drum. It is advised for the use of high viscosity oil and fluids from 300 CPS to 500 CPS.

The follower plate is pushed down by the pressurized pneumatic cylinders, avoiding flow interruptions by air pockets in the oil drum. Moreover, the aluminum follower plate has a double rubber ring of Ø 23.03".

TECHNICAL DATA SKU 250202 **PUMP** 251920 - Ind. Air Operated Pump 20:1 FREE FLOW RATE (87 PSI) 6.4 GPM RAM / LIFTER 250200 **FOLLOWER PLATE** 250212 FOR DRUMS (DRUM SIZE) 55 Gal Drum **WEIGHT** 514 lbs





- 1: Outlet feeding pump air
- 2: Off position
- · 2a: Lifting position up pump and follower plate
- · 2b: Acting position down press-fluid
- · 3: Pressure regulator with manometer for feeding lifter air
- 4 : Cock feeding air lifter follower plate
- 5 : Inlet feeding general air into ilter end lubricator





DLFLURE


Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Industrial application
- Mining


• Farm/Agriculture

- Service shops
- Fleet service facilities
- Grease transfer









MAX. HEIGHT	MIN. HEIGHT	MAX. PRESSURE	PUSHING POWER	VISCOSITY
110.3"	70.9"	116 PSI	58 PSI - 992 LBS 87 PSI - 1433 LBS	200 to 500 ASTM
			116 PSI - 1918 LBS	(77°F)

TECHNICAL DATA	
SKU	250200
PUMP	Without Pump
FREE FLOW RATE (87 PSI)	6.4 GPM
FOLLOWER PLATE	250212
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	514 lbs



250200

Air operated two column pump lifter and press for oil and other fluids. Its 3 way control valve lifts or pulls down the pump and the follower plate, improving the exchanging effort of the 55 gal drum. It is advised for the use of high viscosity oil and fluids from 300 CPS to 500 CPS.

The follower plate is pushed down by the pressurized pneumatic cylinders, avoiding flow interruptions by air pockets in the oil drum. It also allows the collection of all the oil from the inner walls down to the bottom of the drum, where the pump suction is assisted. Moreover, the aluminum follower plate has a double rubber ring of Ø 23.03".

TECHNICAL DATA	
SKU	250212
FOLLOWER PLATE Ø	23.23"
SHANK ADAPTER Ø	1.65"

Aluminum casted follower plate for grease and oil which has rubber double ring \emptyset 23.03" for 55 gal drum. It is quipped with ball valve, breather valve and adaptor.









250342



OIL KIT - TOTE MOUNTED WITH 5:1 PUMP FREE FLOW RATE 7.4 GPM

TECH	TECHNICAL DATA		
SKU	250342		
PUMP	250107 - Air Operated Pump 5:1 - 7.4 GPM		
HOSE REEL	253801 - 30 ft Hose Length		
TOTE BRACKET	250013 - For Pump and Hose Reel		
NOZZLE BRACKET	250006 - Picking up Drop Bracket		
NOZZLE BRACKET - ADAPTOR	250014 - Picking up Drop Adaptor		
NOZZLE	250250 - Digital Oil Control Handle		
AIR REGULATOR	450350 - Filter Regulator & Lubricator		
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft		
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft		
WEIGHT	107 lbs		

SUITABLE FOR:



- * Available in different configurations upon request.
- ** Tote not included.

Typical Applications

- Automotive dealerships
- Farm/Agriculture
- · Service shops
- Industrial application
- Fast lube centers
- Fleet service facilities



OIL KIT - TOTE MOUNTED WITH 3:1 PUMP - D.A FREE FLOW RATE 7.9 GPM



250343



SUITABLE FOR:

- * Available in different configurations upon request.
- ** Tote not included.

TECHNICAL DATA		
SKU	250343	
PUMP	260050 - Air Operated Pump 3:1 - D.A - 7.9 GPN	
HOSE REEL	253801 - 30 ft Hose Length	
TOTE BRACKET	250013 - For Pump and Hose Reel	
NOZZLE BRACKET	250006 - Picking up Drop Bracket	
NOZZLE BRACKET - ADAPTOR	250014 - Picking up Drop Adaptor	
NOZZLE	250250 - Digital Oil Control Handle	
AIR REGULATOR	450350 - Filter Regulator & Lubricator	
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft	
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft	
WEIGHT	106 lbs	

OIL KIT - TOTE MOUNTED WITH 5:1 PUMP FREE FLOW RATE 7.4 GPM



TECHNICAL DATA	
SKU 250340	
PUMP	250107 - Air Operated Pump 5:1 - 7.4 GPM
TOTE BRACKET	250013 - For Pump and Hose Reel
AIR REGULATOR	450350 - Filter Regulator & Lubricator
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft
WEIGHT	48 lbs



SUITABLE FOR:




250340

- * Available in different configurations upon request.
- ** Tote not included.

Typical Applications

- · Automotive dealerships
- Farm/Agriculture
- Service shops
- Industrial application
- Fast lube centers
- Fleet service facilities

OIL KIT - TOTE MOUNTED WITH 3:1 PUMP - D.A FREE FLOW RATE 7.9 GPM



TE	TECHNICAL DATA	
SKU	250341	
PUMP	260050 - Air Operated Pump 3:1 - D.A - 7.9 GPM	
TOTE BRACKET	250013 - For Pump and Hose Reel	
AIR REGULATOR	450350 - Filter Regulator & Lubricator	
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft	
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft	
WEIGHT	47 lbs	







SUITABLE FOR:



- * Available in different configurations upon request.
- ** Tote not included.



O W

OIL KIT - WALL MOUNTED WITH 5:1 PUMP FREE FLOW RATE 7.4 GPM

TECHNICAL DATA	
SKU	250338
PUMP	251903 - Air Operated Pump 5:1
PUMP BRACKET	204601 - Wall Mounted Bracket
TOTE BRACKET	250013 - For Pump and Hose Reel
DOWN TUBE KIT	250016 - Down Tube Kit
AIR REGULATOR	450350 - Filter Regulator & Lubricator
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft
WEIGHT	32 lbs



250338



SUITABLE FOR:

- * Available in different configurations upon request.
- ** Tote not included.

Typical Applications

- Automotive dealerships
- Farm/Agriculture
- · Service shops

TOTE/IBC

- Industrial application
- Fast lube centers
- Fleet service facilities



OIL KIT - TOTE MOUNTED WITH 3:1 PUMP - D.A FREE FLOW RATE 7.9 GPM

TECHNICAL DATA	
SKU	250339
PUMP	260048 - Air Operated Pump 3:1 - D.A
PUMP BRACKET	204601 - Wall Mounted Bracket
TOTE BRACKET	250013 - For Pump and Hose Reel
DOWN TUBE KIT	250016 - Down Tube Kit
AIR REGULATOR	450350 - Filter Regulator & Lubricator
CONNECTION AIR HOSE	411406 - Connection Hose - 6 ft
CONNECTION OIL HOSE	241403 - Connection Hose - 3 ft
WEIGHT	31 lbs

* Available in different configurations upon request.

250339

** Tote not included.

OLFLUZE

DRUM KIT WITH 5:1 PUMP, TROLLEY, HOSE REEL AND DIGITAL NOZZLE

TECHNICAL DATA	
SKU 250314	
ated Pump 5:1 - 7.4 GPM	
eels Trolley	
se Length	
on Hose - 5 ft	
il Control Handle	



SUITABLE FOR:





250314

- * Available in different configurations upon request.
- ** Drum not included.


Typical Applications

· Automotive dealerships

· Service shops

- · Fast lube centers
- · Farm/Agriculture

DRUM KIT WITH 5:1 PUMP, TROLLEY AND DIGITAL NOZZLE

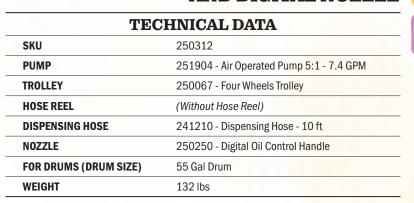

Typical Applications

- · Automotive dealerships
- · Fast lube centers
- · Fleet service facilities

Fleet service facilities

· Service shops • Farm/Agriculture





250312

- * Available in different configurations upon request.
- ** Drum not included.

DRUM KIT WITH 5:1 PUMP, TROLLEY AND DIGITAL NOZZLE

TEC	CHNICAL DATA
SKU	250310
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	250066 - Four Wheels Trolley
HOSE REEL	(Without Hose Reel)
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	108 lbs

Typical Applications

· Service shops

- · Automotive dealerships
- · Fast lube centers • Farm/Agriculture
- · Fleet service facilities







- * Available in different configurations upon request.
- ** Drum not included.









SUITABLE FOR:





250320

- * Available in different configurations upon request.
- ** Drum not included.

DRUM KIT WITH 5:1 PUMP, TROLLEY, HOSE REEL AND DIGITAL NOZZLE

TECHNICAL DATA	
SKU	250320
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	250039 - Three Wheels Trolley
HOSE REEL	253801 - 30 ft Hose Length
CONNECTION OIL HOSE	241405 - Connection Hose - 5 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	110 lbs

Typical Applications

- Automotive dealerships
- · Fast lube centers
- · Fleet service facilities

- · Service shops
- Farm/Agriculture





DRUM KIT WITH 5:1 PUMP, TROLLEY AND DIGITAL NOZZLE

TECHNICAL DATA	
SKU	250318
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	250039 - Three Wheels Trolley
HOSE REEL	(Without Hose Reel)
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	73 lbs

SUITABLE FOR:





- * Available in different configurations upon request.
- ** Drum not included.

Typical Applications

- · Automotive dealerships
- · Fast lube centers
- · Fleet service facilities

- · Service shops
- Farm/Agriculture











250316

* Available in different configurations upon request.

** Drum not included.

DRUM KIT WITH 5:1 PUMP, TROLLEY AND NOZZLE

TEC	TECHNICAL DATA	
SKU	250316	
PUMP	251904 - Air Operated Pump 5:1 - 7.4 GPM	
TROLLEY	250039 - Three Wheels Trolley	
HOSE REEL	(Without Hose Reel)	
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft	
NOZZLE	250252 - Oil Control Handle	
FOR DRUMS (DRUM SIZE)	55 Gal Drum	
WEIGHT	72 lbs	

Typical Applications

- · Automotive dealerships
- · Fast lube centers
- · Fleet service facilities

- · Service shops
- Farm/Agriculture

OLFLURE

DRUM KIT WITH 3:1 PUMP, TROLLEY, HOSE REEL AND DIGITAL NOZZLE

TECHNICAL DATA	
250326	
251902 - Air Operated Pump 3:1 - 6.6 GPM	
250039 - Three Wheels Trolley	
253801 - 30 ft Hose Length	
260032 - Connection Hose - 5 ft	
250250 - Digital Oil Control Handle	
55 Gal Drum	
104 lbs	

SUITABLE FOR:





250326

- * Available in different configurations upon request.
- ** Drum not included.

Typical Applications

· Automotive dealerships

· Service shops

- · Fast lube centers
- Farm/Agriculture

DRUM KIT WITH 3:1 PUMP, TROLLEY AND DIGITAL NOZZLE

TECHNICAL DATA	
SKU 253101	
PUMP	251902 - Air Operated Pump 3:1 - 6.6 GPM
TROLLEY	250039 - Three Wheels Trolley
10SE REEL	(Without Hose Reel)
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	69 lbs

Typical Applications

- · Automotive dealerships
- · Fast lube centers
- · Fleet service facilities

Fleet service facilities

· Service shops • Farm/Agriculture





- * Available in different configurations upon request.
- ** Drum not included.

DRUM KIT WITH 3:1 PUMP, TROLLEY AND NOZZLE

TECHNICAL DATA	
SKU 250322	
PUMP	251902 - Air Operated Pump 3:1 - 6.6 GPM
TROLLEY	250039 - Three Wheels Trolley
HOSE REEL	(Without Hose Reel)
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250252 - Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	67 lbs

Typical Applications

· Service shops

- · Automotive dealerships
- · Fast lube centers
- · Fleet service facilities
- Farm/Agriculture



SUITABLE FOR:





- * Available in different configurations upon request.
- ** Drum not included.







OIL KIT - WALL MOUNTED WITH 5:1 PUMP, HOSE REEL AND DIGITAL NOZZLE

TECHNICAL DATA	
<mark>sku</mark>	250336
PUMP	251903 - Air Operated Pump 5:1 - 7.4 GPM
WALL BRACKET	204601 - Wall Bracket
DOWN TUBE KIT	250015 - Down Tube Kit
HOSE REEL	253801 - 30 ft Hose Length
CONNECTION OIL HOSE	241405 - Connection Hose - 5 ft
NOZZLE	250250 - Digital Oil Control Handle
NOZZLE BRACKET	250006 - Picking up Drop Bracket
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	80 lbs

Typical Applications

· Automotive dealerships

· Service shops

- · Fast lube centers
- Farm/Agriculture
- · Fleet service facilities

- * Available in different configurations upon request.
- ** Drum not included.



OIL KIT - DRUM MOUNTED WITH 5:1 PUMP, HOSE REEL AND DIGITAL NOZZLE

TECHNICAL DATA	
250334	
251904 - Air Operated Pump 5:1 - 7.4 GPM	
241405 - Connection Hose - 5 ft	
253801 - 30 ft Hose Length	
250250 - Digital Oil Control Handle	
250006 - Picking up Drop Bracket	
55 Gal Drum	
72 lbs	

Typical Applications

- · Automotive dealerships
- Fast lube centers
- Fleet service facilities

- Service shops
- Farm/Agriculture

* Available in different configurations upon request.

250334

** Drum not included.

WALL MOUNTED KIT **WITH 5:1 PUMP AND DOWN TUBE**

TECH	TECHNICAL DATA	
SKU	250331	
PUMP	251903 - Air Operated Pump 5:1 - 7.4 GPM	
WALL BRACKET	204601 - Wall Bracket	
DOWN TUBE KIT	250015 - Down Tube Kit	
FOR DRUMS (DRUM SIZE)	55 Gal Drum	
WEIGHT	26 lbs	

Typical Applications

Automotive dealerships

· Service shops

- · Fast lube centers
- · Farm/Agriculture
- Fleet service facilities

SUITABLE FOR:





250331

- * Available in different configurations upon request.
- ** Drum not included.

WALL MOUNTED KIT WITH 3:1 PUMP AND DOWN TUBE

TECHNICAL DATA	
SKU	250330
PUMP	251901 - Air Operated Pump 3:1 - 6.6 GPM
WALL BRACKET	204601 - Wall Bracket
DOWN TUBE KIT	250015 - Down Tube Kit
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	22 lbs

Typical Applications

· Automotive dealerships

Service shops

- · Fast lube centers
- Farm/Agriculture
- · Fleet service facilities

SUITABLE FOR:





250330

- * Available in different configurations upon request.
- ** Drum not included.

WALL MOUNTED KIT WITH 1:1 PUMP AND DOWN TUBE

TECHNICAL DATA	
SKU	250329
PUMP	250101 - Air Operated Pump 1:1 - 9.3 GPM
WALL BRACKET	204601 - Wall Bracket
DOWN TUBE KIT	250015 - Down Tube Kit
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	22 lbs

Typical Applications

- · Automotive dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops · Farm/Agriculture

SUITABLE FOR:





- * Available in different configurations upon request.
- ** Drum not included.







SUITABLE FOR:



250303

- * Available in different configurations upon request.
- ** Drum not included.



TECHNICAL DATA SKU 250303 **PUMP** 251904 - Air Operated Pump 5:1 - 7.4 GPM **DISPENSING HOSE** 241210 - Dispensing Hose - 10 ft 250250 - Digital Oil Control Handle **NOZZLE** FOR DRUMS (DRUM SIZE) 55 Gal Drum WEIGHT 25 lbs

DRUM MOUNTED KIT WITH 5:1 PUMP,

HOSE AND DIGITAL NOZZLE

Typical Applications

Automotive dealerships

Service shops

- · Fast lube centers
- · Farm/Agriculture
- Fleet service facilities







SUITABLE FOR:





253201

- * Available in different configurations upon request.
- ** Drum not included.

HOSE AND DIGITAL NOZZLE

DRUM MOUNTED KIT WITH 3:1 PUMP,

TECHNICAL DATA	
SKU	253201
PUMP	251902 - Air Operated Pump 3:1 - 6.6 GPM
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	21 lbs

Typical Applications

· Automotive dealerships

· Service shops

- Fast lube centers
- Farm/Agriculture
- · Fleet service facilities



250344







· Service shops

DRUM MOUNTED KIT WITH 3:1 PUMP, GOOSENECK SPIGOT AND DRIP PAN

TECHNICAL DATA	
SKU	250344
PUMP	251902 - Air Operated Pump 3:1 - 6.6 GPM
DISPENSER	200301 - Gooseneck Spigot
BRACKET	204102 - Drip Pan
FOR DRUMS (DRUM SIZE)	55 Gal Drum
WEIGHT	18 lbs

Typical Applications

- · Automotive dealerships
- · Fast lube centers • Farm/Agriculture
- · Fleet service facilities

- * Available in different configurations upon request.
- ** Drum not included.

OIL KIT - DRUM MOUNTED WITH 5:1 PUMP, 4 WHEEL TROLLEY AND DIGITAL NOZZLE

TECHNICAL DATA	
SKU	250308
PUMP	260024 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	260030 - Four Wheels Trolley
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	53 lbs

Typical Applications

Automotive dealerships

· Service shops

- · Fast lube centers
- Farm/Agriculture
- Fleet service facilities





SUITABLE FOR:



250308

- * Available in different configurations upon request.
- ** Drum not included.

OIL KIT - DRUM MOUNTED WITH 5:1 PUMP, 4 WHEEL TROLLEY AND NOZZLE

TECHNICAL DATA	
SKU	250307
PUMP	260024 - Air Operated Pump 5:1 - 7.4 GPM
TROLLEY	260030 - Four Wheels Trolley
DISPENSING HOSE	241210 - Dispensing Hose - 10 ft
NOZZLE	250252 - Oil Control Handle
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	50 lbs

Typical Applications

· Automotive dealerships

· Service shops

- · Fast lube centers
- Farm/Agriculture
- · Fleet service facilities

SUITABLE FOR:





- * Available in different configurations upon request.
- ** Drum not included.



· Fleet service facilities

· Fleet service facilities





OIL KIT - DRUM MOUNTED WITH 5:1 PUMP AND DIGITAL NOZZLE

TECHNICAL DATA	
SKU 250301	
PUMP	260024 - Air Operated Pump 5:1 - 7.4 GPM
DISPENSING HOSE	260025 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	23 lbs

Typical Applications

Automotive dealerships

· Service shops

- · Fast lube centers
- Farm/Agriculture

SUITABLE FOR:



250301

- * Available in different configurations upon request.
- ** Drum not included.





TECHNICAL DATA	
SKU	250302
PUMP	260026 - Air Operated Pump 3:1 - 6.6 GPM
DISPENSING HOSE	260025 - Dispensing Hose - 10 ft
NOZZLE	250250 - Digital Oil Control Handle
FOR DRUMS (DRUM SIZE)	16 Gal Drum
WEIGHT	19 lbs

Typical Applications

Automotive dealerships

· Service shops

- · Fast lube centers
- · Farm/Agriculture







- * Available in different configurations upon request.
- ** Drum not included.





SOME ADVANTAGES OF USING HOSE REELS

- Improves the environment.
- Ensures security by reducing serious accidents. Since the hose is rolled up and stored in the reel component after it is finished being used it could prevent future tripping incidents.
- Prevents leakage and reduces cost. If hoses are kept in good condition and on the reel, it will reduce the wear and tear, extending the life of the hose up to five times.
- Improves efficiency by helping people control hoses as they like, thereby the productivity is increased by allowing quick and easy dispense of fluids.




The hose reels are categorized by the diameter, length of the hose, working pressure and the type of operation it could be used in. They are usually installed in fixed locations, overhead, walls, trucks or on mobile carts. In order to satisfy the dispense requirements, a reel can be chosen to have a bigger or smaller fluid inlet or outlet. Choosing the proper reel will improve your operation making it safer and more reliable.



SIZES AND CAPACITY

MODEL F400	Up to 30ft 3/8" or Up to 30ft 1/4"
MODEL F460	Up to 60ft 3/8" or Up to 50ft 1/2"
MODEL F550	Up to 80ft 1/2" or Up to 50ft 3/4"
MODEL F555	Up to 100ft 1/2" or Up to 60ft 3/4" or Up to 50ft 1"
MODEL F560	Up to 100ft 3/4" or Up to 100ft 1"

HOSE REEL INSTALLATIONS

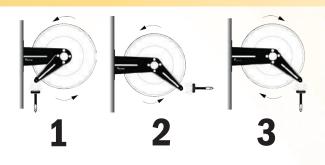

WALL MOUNTED

Available in 3 different set ups, the first set up is reel 1, which is the one with the hose facing to the front of the reel. The two other set ups 1 and 3 have the hose downwards. Set up 3 is the most common since the arms are set to go in the direction towards the right.



BENCH AND LUBE TRUCKS

Bench and lube trucks installations are the same as set ups 1 and 3.



CEILING

Ceiling installations are the same as the wall mounted 2 set up.


FEATURES:

- DOUBLE ARMS
 - GALVANIZED SWIVELLING 90° JOINT
 - POWDER COATED PAINT
 - POLYURETHANE SEALS
 - UNIVERSAL HOSE STOP
 - MAX. WORKING PRESSURE: 2,321 PSI

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 1SC hose and zinc plated steel fittings NPT(f) x NPT(m).



NODEL	INLET	OUTLET	HOSE LENGTH	HOSEØ	WEIGHT
F400	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	28 lbs
F400	1/2" NPT(m)	1/2" NPT(m)	30 ft	3/8"	36 lbs
F400	1/2" NPT(m)	1/2" NPT(m)	30 ft	1/2"	38 lbs
F460	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	36 lbs
F460	1/2" NPT(m)	1/2" NPT(m)	50 ft	3/8"	49 lbs
F460	1/2" NPT(m)	1/2" NPT(m)	50 ft	1/2"	52 lbs
F460	1/2" NPT(m)	1/2" NPT(m)	60 ft	1/2"	55 lbs
F550	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	49 lbs
F550	1/2" NPT(m)	1/2" NPT(m)	65 ft	1/2"	61 lbs
F550	1/2" NPT(m)	1/2" NPT(m)	80 ft	1/2"	75 lbs
	F400 F400 F460 F460 F460 F460 F550	F400 1/2" NPT(m) F400 1/2" NPT(m) F400 1/2" NPT(m) F460 1/2" NPT(m) F460 1/2" NPT(m) F460 1/2" NPT(m) F450 1/2" NPT(m) F550 1/2" NPT(m) F550 1/2" NPT(m)	F400 1/2" NPT(m) 1/2" NPT(m) F400 1/2" NPT(m) 1/2" NPT(m) F400 1/2" NPT(m) 1/2" NPT(m) F460 1/2" NPT(m) 1/2" NPT(m) F550 1/2" NPT(m) 1/2" NPT(m) F550 1/2" NPT(m) 1/2" NPT(m)	F400 1/2" NPT(m) 1/2" NPT(m) Without hose F400 1/2" NPT(m) 1/2" NPT(m) 30 ft F400 1/2" NPT(m) 1/2" NPT(m) 30 ft F460 1/2" NPT(m) 1/2" NPT(m) Without hose F460 1/2" NPT(m) 1/2" NPT(m) 50 ft F460 1/2" NPT(m) 1/2" NPT(m) 50 ft F460 1/2" NPT(m) 1/2" NPT(m) 60 ft F550 1/2" NPT(m) 1/2" NPT(m) Without hose F550 1/2" NPT(m) 1/2" NPT(m) 65 ft	F400 1/2" NPT(m) 1/2" NPT(m) Without hose - F400 1/2" NPT(m) 1/2" NPT(m) 30 ft 3/8" F400 1/2" NPT(m) 1/2" NPT(m) 30 ft 1/2" F460 1/2" NPT(m) 1/2" NPT(m) Without hose - F460 1/2" NPT(m) 1/2" NPT(m) 50 ft 3/8" F460 1/2" NPT(m) 1/2" NPT(m) 50 ft 1/2" F460 1/2" NPT(m) 1/2" NPT(m) 60 ft 1/2" F550 1/2" NPT(m) 1/2" NPT(m) Without hose - F550 1/2" NPT(m) 1/2" NPT(m) 65 ft 1/2"

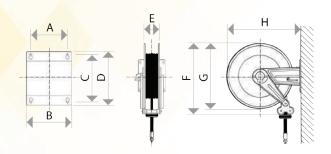

MODEL	Α	В	C	D	E	F	G	Н
F400	6.2"	4.7"	6.6"	7.6"	3.8"	17.7"	15.8"	17.1"
F460	6.2"	4.7"	6.6"	7.6"	3.8"	18.9"	18.1"	19.7"
F550	7.9"	5.9"	8.9"	10.7"	4.8"	23.3"	21.7"	23.7"

FEATURES:


- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE: 2,321 PSI

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 1SC hose and zinc plated steel fittings NPT(f) x NPT(m).





SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
260017	F555	1/2" NPT(m)	1/2" NPT(m)	Without hose		58 lbs
251008	F555	1/2" NPT(m)	1/2" NPT(m)	100 ft	1/2"	90 lbs
260018	F555	3/4" NPT(m)	3/4" NPT(m)	Without hose		59 lbs
251009	F555	3/4" NPT(m)	3/4" NPT(m)	50 ft	3/4"	79 lbs
251010	F555	3/4" NPT(m)	3/4" NPT(m)	60 ft	3/4"	82 lbs
260019	F555	1" NPT(m)	1" NPT(m)	Without hose	-	60 lbs
251011	F555	1" NPT(m)	1" NPT(m)	50 ft	1"	89 lbs
260020	F560	3/4" NPT(m)	3/4" NPT(m)	Without hose	-	73 lbs
251012	F560	3/4" NPT(m)	3/4" NPT(m)	80 ft	3/4"	104 lbs
251013	F560	3/4" NPT(m)	3/4" NPT(m)	100 ft	3/4"	112 lbs
260021	F560	1" NPT(m)	1" NPT(m)	Without hose	1"	74 lbs
251014	F560	1" NPT(m)	1" NPT(m)	65 ft	1"	112 lbs
251015	F560	1" NPT(m)	1" NPT(m)	100 ft	1"	132 lbs

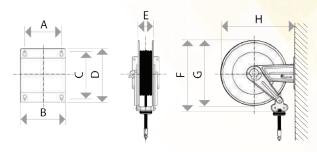

MODEL	Α	В	С	D	E	F	G	Н
F555	9.9"	7.9"	8.9"	10.7"	6.7"	23.3"	21.7"	23.7"
F560	17.4"	15.4"	8.9"	10.7"	14.2"	23.3"	21.7"	23.7"

, Holflube






FEATURES:


- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE: 2,321 PSI


Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 1SC hose and zinc plated steel fittings NPT(f) x NPT(m).



SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSEØ	WEIGHT
251016	CS500	1/2" NPT(m)	1/2" NPT(m)	Without hose	-	50 lbs
251017	CS500	1/2" NPT(m)	1/2" NPT(m)	30 ft	1/2"	60 lbs
251018	CS500	1/2" NPT(m)	1/2" NPT(m)	50 ft	1/2"	66 lbs
251019	CS500	1/2" NPT(m)	1/2" NPT(m)	60 ft	1/2"	70 lbs

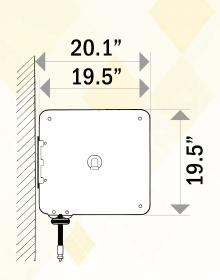

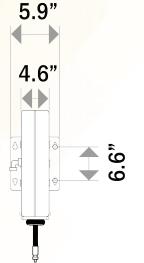



FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
 - 1/2" THREAD FOR 3/8" HOSE
 - 1/2" THREAD FOR 3/4" HOSE
 - 3/4" THREAD FOR 1/2" HOSE
 - 3/4" THREAD FOR 1" HOSE
 - 1" THREAD FOR 3/4" HOSE

Approximately Weight per Foot						
3/8"	3/8" 1/2" 3/4" 1"					
+- 3.1 oz	+- 4.2 oz	+- 6.1 oz	+- 9.2 oz			



3/8" HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
251101	3/8"	2,610 PSI	10,440 PSI	30 ft	NPT(m) 3/8" x NPT(f) 1/2"
251102	3/8"	2,610 PSI	10,440 PSI	50 ft	NPT(m) 3/8" x NPT(f) 1/2"

1/2" HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
251103	1/2"	2,320 PSI	9,280 PSI	30 ft	NPT(m) 1/2" x NPT(f) 1/2"
251104	1/2"	2,320 PSI	9,280 PSI	50 ft	NPT(m) 1/2" x NPT(f) 1/2"
251105	1/2"	2,320 PSI	9,280 PSI	60 ft	NPT(m) 1/2" x NPT(f) 1/2"
251106	1/2"	2,320 PSI	9,280 PSI	65 ft	NPT(m) 1/2" x NPT(f) 1/2"
251107	1/2"	2,320 PSI	9,280 PSI	80 ft	NPT(m) 1/2" x NPT(f) 1/2"
251108	1/2"	2,320 PSI	9,280 PSI	100 ft	NPT(m) 1/2" x NPT(f) 1/2"

3/4" HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
251109	3/4"	1,520 PSI	6,090 PSI	50 ft	NPT(m) 3/4" x NPT(f) 3/4"
251110	3/4"	1,520 PSI	6,090 PSI	65 ft	NPT(m) 3/4" x NPT(f) 3/4"
251111	3/4"	1,520 PSI	6,090 PSI	80 ft	NPT(m) 3/4" x NPT(f) 3/4"
251112	3/4"	1,520 PSI	6,090 PSI	100 ft	NPT(m) 3/4" x NPT(f) 3/4"

1" HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
251113	1"	1,280 PSI	5,075 PSI	50 ft	NPT(m) 1" x NPT(f) 1"
251114	1"	1,280 PSI	5,075 PSI	65 ft	NPT(m) 1" x NPT(f) 1"
251115	1"	1,280 PSI	5,075 PSI	100 ft	NPT(m) 1" x NPT(f) 1"







FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
 - 1/2" THREAD FOR 3/8" HOSE
 - 1/2" THREAD FOR 3/4" HOSE
 - 3/4" THREAD FOR 1/2" HOSE
 - 3/4" THREAD FOR 1" HOSE
 - 1" THREAD FOR 3/4" HOSE

Approximately Weight per Foot						
3/8"	1/2" 3/4" 1"					
+- 3.1 oz	+- 3.1 oz					

CONNECTION HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
241203	1/2"	2,320 PSI	9,280 PSI	3 ft	NPT(m) 1/2" x NPT(f) 1/2"
241204	1/2"	2,320 PSI	9,280 PSI	4 ft	NPT(m) 1/2" x NPT(f) 1/2"
241205	1/2"	2,320 PSI	9,280 PSI	5 ft	NPT(m) 1/2" x NPT(f) 1/2"
241206	1/2"	2,320 PSI	9,280 PSI	6 ft	NPT(m) 1/2" x NPT(f) 1/2"
241207	1/2"	2,320 PSI	9,280 PSI	7 ft	NPT(m) 1/2" x NPT(f) 1/2"
241208	1/2"	2,320 PSI	9,280 PSI	8 ft	NPT(m) 1/2" x NPT(f) 1/2"
241209	1/2"	2,320 PSI	9,280 PSI	9 ft	NPT(m) 1/2" x NPT(f) 1/2"
241210	1/2"	2,320 PSI	9,280 PSI	10 ft	NPT(m) 1/2" x NPT(f) 1/2"
241215	1/2"	2,320 PSI	9,280 PSI	15 ft	NPT(m) 1/2" x NPT(f) 1/2"
241220	1/2"	2,320 PSI	9,280 PSI	20 ft	NPT(m) 1/2" x NPT(f) 1/2"

CONNECTION HOSES - FEMALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
241403	1/2"	2,320 PSI	9,280 PSI	3 ft	NPT(f) 1/2" x NPT(f) 1/2"
241404	1/2"	2,320 PSI	9,280 PSI	4 ft	NPT(f) 1/2" x NPT(f) 1/2"
241405	1/2"	2,320 PSI	9,280 PSI	5 ft	NPT(f) 1/2" x NPT(f) 1/2"
241406	1/2"	2,320 PSI	9,280 PSI	6 ft	NPT(f) 1/2" x NPT(f) 1/2"
241407	1/2"	2,320 PSI	9,280 PSI	7 ft	NPT(f) 1/2" x NPT(f) 1/2"
241408	1/2"	2,320 PSI	9,280 PSI	8 ft	NPT(f) 1/2" x NPT(f) 1/2"
241409	1/2"	2,320 PSI	9,280 PSI	9 ft	NPT(f) 1/2" x NPT(f) 1/2"
241410	1/2"	2,320 PSI	9,280 PSI	10 ft	NPT(f) 1/2" x NPT(f) 1/2"
241415	1/2"	2,320 PSI	9,280 PSI	15 ft	NPT(f) 1/2" x NPT(f) 1/2"
241420	1/2"	2,320 PSI	9,280 PSI	20 ft	NPT(f) 1/2" x NPT(f) 1/2"

CONNECTION HOSES - MALE X MALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
241503	1/2"	2,320 PSI	9,280 PSI	3 ft	NPT(m) 1/2" x NPT(m) 1/2"
241504	1/2"	2,320 PSI	9,280 PSI	4 ft	NPT(m) 1/2" x NPT(m) 1/2"
241505	1/2"	2,320 PSI	9,280 PSI	5 ft	NPT(m) 1/2" x NPT(m) 1/2"
241506	1/2"	2,320 PSI	9,280 PSI	6 ft	NPT(m) 1/2" x NPT(m) 1/2"
241507	1/2"	2,320 PSI	9,280 PSI	7 ft	NPT(m) 1/2" x NPT(m) 1/2"
241508	1/2"	2,320 PSI	9,280 PSI	8 ft	NPT(m) 1/2" x NPT(m) 1/2"
24150 <mark>9</mark>	1/2"	2,320 PSI	9,280 PSI	9 ft	NPT(m) 1/2" x NPT(m) 1/2"
241510	1/2"	2,320 PSI	9,280 PSI	10 ft	NPT(m) 1/2" x NPT(m) 1/2"
241515	1/2"	2,320 PSI	9,280 PSI	15 ft	NPT(m) 1/2" x NPT(m) 1/2"
241520	1/2"	2,320 PSI	9,280 PSI	20 ft	NPT(m) 1/2" x NPT(m) 1/2"

FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
 - 1/2" THREAD FOR 3/8" HOSE
 - 1/2" THREAD FOR 3/4" HOSE
 - 3/4" THREAD FOR 1/2" HOSE
 - 3/4" THREAD FOR 1" HOSE
 - 1" THREAD FOR 3/4" HOSE

Approximately Weight per Foot						
3/8"	3/8" 1/2"		1"			
+- 3.1 oz	+- 4.2 oz	+- 6.1 oz	+- 9.2 oz			





CONNECTION HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
242203	3/4"	1,520 PSI	6,090 PSI	3 ft	NPT(m) 3/4" x NPT(f) 3/4"
242204	3/4"	1,520 PSI	6,090 PSI	4 ft	NPT(m) 3/4" x NPT(f) 3/4"
242205	3/4"	1,520 PSI	6,090 PSI	5 ft	NPT(m) 3/4" x NPT(f) 3/4"
242206	3/4"	1,520 PSI	6,090 PSI	6 ft	NPT(m) 3/4" x NPT(f) 3/4"
242207	3/4"	1,520 PSI	6,090 PSI	7 ft	NPT(m) 3/4" x NPT(f) 3/4"
242208	3/4"	1,520 PSI	6,090 PSI	8 ft	NPT(m) 3/4" x NPT(f) 3/4"
242209	3/4"	1,520 PSI	6,090 PSI	9 ft	NPT(m) 3/4" x NPT(f) 3/4"
242210	3/4"	1,520 PSI	6,090 PSI	10 ft	NPT(m) 3/4" x NPT(f) 3/4"
242215	3/4"	1,520 PSI	6,090 PSI	15 ft	NPT(m) 3/4" x NPT(f) 3/4"
242220	3/4"	1,520 PSI	6,090 PSI	20 ft	NPT(m) 3/4" x NPT(f) 3/4"







FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
 - 1/2" THREAD FOR 3/8" HOSE
 - 1/2" THREAD FOR 3/4" HOSE
 - 3/4" THREAD FOR 1/2" HOSE
 - 3/4" THREAD FOR 1" HOSE
 - 1" THREAD FOR 3/4" HOSE

Approximately Weight per Foot						
3/8"	1/2"	3/4"	1"			
+- 3.1 oz	+- 4.2 oz	+- 6.1 oz	+- 9.2 oz			

CONNECTION HOSES - FEMALE X FEMALE

	SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
	242403	3/4"	1,520 PSI	6,090 PSI	3 ft	NPT(f) 3/4" x NPT(f) 3/4"
	242404	3/4"	1,520 PSI	6,090 PSI	4 ft	NPT(f) 3/4" x NPT(f) 3/4"
	242405	3/4"	1,520 PSI	6,090 PSI	5 ft	NPT(f) 3/4" x NPT(f) 3/4"
	242406	3/4"	1,520 PSI	6,090 PSI	6 ft	NPT(f) 3/4" x NPT(f) 3/4"
	242407	3/4"	1,520 PSI	6,090 PSI	7 ft	NPT(f) 3/4" x NPT(f) 3/4"
	242408	3/4"	1,520 PSI	6,090 PSI	8 ft	NPT(f) 3/4" x NPT(f) 3/4"
	242409	3/4"	1,520 PSI	6,090 PSI	9 ft	NPT(f) 3/4" x NPT(f) 3/4"
	242410	3/4"	1,520 PSI	6,090 PSI	10 ft	NPT(f) 3/4" x NPT(f) 3/4"
	242415	3/4"	1,520 PSI	6,090 PSI	15 ft	NPT(f) 3/4" x NPT(f) 3/4"
	242420	3/4"	1,520 PSI	6,090 PSI	20 ft	NPT(f) 3/4" x NPT(f) 3/4"
_						

CONNECTION HOSES - MALE X MALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
242503	3/4"	1,520 PSI	6,090 PSI	3 ft	NPT(m) 3/4" x NPT(m) 3/4"
242504	3/4"	1,520 PSI	6,090 PSI	4 ft	NPT(m) 3/4" x NPT(m) 3/4"
242505	3/4"	1,520 PSI	6,090 PSI	5 ft	NPT(m) 3/4" x NPT(m) 3/4"
242506	3/4"	1,520 PSI	6,090 PSI	6 ft	NPT(m) 3/4" x NPT(m) 3/4"
242507	3/4"	1,520 PSI	6,090 PSI	7 ft	NPT(m) 3/4" x NPT(m) 3/4"
242508	3/4"	1,520 PSI	6,090 PSI	8 ft	NPT(m) 3/4" x NPT(m) 3/4"
242509	3/4"	1,520 PSI	6,090 PSI	9 ft	NPT(m) 3/4" x NPT(m) 3/4"
242510	3/4"	1,520 PSI	6,090 PSI	10 ft	NPT(m) 3/4" x NPT(m) 3/4"
242515	3/4"	1,520 PSI	6,090 PSI	15 ft	NPT(m) 3/4" x NPT(m) 3/4"
242520	3/4"	1,520 PSI	6,090 PSI	20 ft	NPT(m) 3/4" x NPT(m) 3/4"

FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
 - 1/2" THREAD FOR 3/8" HOSE
 - 1/2" THREAD FOR 3/4" HOSE
 - 3/4" THREAD FOR 1/2" HOSE
 - 3/4" THREAD FOR 1" HOSE
 - 1" THREAD FOR 3/4" HOSE

Approximately Weight per Foot							
3/8"	3/8" 1/2" 3/4" 1"						
+- 3.1 oz	+- 4.2 oz	+- 6.1 oz	+- 9.2 oz				





CONNECTION HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
243203	1"	1,280 PSI	5,075 PSI	3 ft	NPT(m) 1" x NPT(f) 1"
243204	1"	1,280 PSI	5,075 PSI	4 ft	NPT(m) 1" x NPT(f) 1"
243205	1"	1,280 PSI	5,075 PSI	5 ft	NPT(m) 1" x NPT(f) 1"
243206	1"	1,280 PSI	5,075 PSI	6 ft	NPT(m) 1" x NPT(f) 1"
243207	1"	1,280 PSI	5,075 PSI	7 ft	NPT(m) 1" x NPT(f) 1"
243208	1"	1,280 PSI	5,075 PSI	8 ft	NPT(m) 1" x NPT(f) 1"
243209	1"	1,280 PSI	5,075 PSI	9 ft	NPT(m) 1" x NPT(f) 1"
243210	1"	1,280 PSI	5,075 PSI	10 ft	NPT(m) 1" x NPT(f) 1"
243215	1"	1,280 PSI	5,075 PSI	15 ft	NPT(m) 1" x NPT(f) 1"
243220	1"	1,280 PSI	5,075 PSI	20 ft	NPT(m) 1" x NPT(f) 1"

CONNECTION HOSES - FEMALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
243403	1"	1,280 PSI	5,075 PSI	3 ft	NPT(f) 1" x NPT(f) 1"
243404	1"	1,280 PSI	5,075 PSI	4 ft	NPT(f) 1" x NPT(f) 1"
243405	1"	1,280 PSI	5,075 PSI	5 ft	NPT(f) 1" x NPT(f) 1"
243406	1"	1,280 PSI	5,075 PSI	6 ft	NPT(f) 1" x NPT(f) 1"
243407	1"	1,280 PSI	5,075 PSI	7 ft	NPT(f) 1" x NPT(f) 1"
243408	1"	1,280 PSI	5,075 PSI	8 ft	NPT(f) 1" x NPT(f) 1"
243409	1"	1,280 PSI	5,075 PSI	9 ft	NPT(f) 1" x NPT(f) 1"
243410	1"	1,280 PSI	5,075 PSI	10 ft	NPT(f) 1" x NPT(f) 1"
243415	1"	1,280 PSI	5,075 PSI	15 ft	NPT(f) 1" x NPT(f) 1"
243420	1"	1,280 PSI	5,075 PSI	20 ft	NPT(f) 1" x NPT(f) 1"

, Nolflu<u>se</u>







FEATURES:

- SYNTHETIC RUBBER HOSE 1SC/R1.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
 - 1/2" THREAD FOR 3/8" HOSE
 - 1/2" THREAD FOR 3/4" HOSE
 - 3/4" THREAD FOR 1/2" HOSE
 - 3/4" THREAD FOR 1" HOSE
 - 1" THREAD FOR 3/4" HOSE

Approximately Weight per Foot					
3/8"	1/2"	3/4"	1"		
+- 3.1 oz	+- 4.2 oz	+- 6.1 oz	+- 9.2 oz		

CONNECTION HOSES - MALE X MALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
243503	1"	1,280 PSI	5,075 PSI	3 ft	NPT(m) 1" x NPT(m) 1"
243504	1"	1,280 PSI	5,075 PSI	4 ft	NPT(m) 1" x NPT(m) 1"
243505	1"	1,280 PSI	5,075 PSI	5 ft	NPT(m) 1" x NPT(m) 1"
243506	1"	1,280 PSI	5,075 PSI	6 ft	NPT(m) 1" x NPT(m) 1"
243507	1"	1,280 PSI	5,075 PSI	7 ft	NPT(m) 1" x NPT(m) 1"
243508	1"	1,280 PSI	5,075 PSI	8 ft	NPT(m) 1" x NPT(m) 1"
243509	1"	1,280 PSI	5,075 PSI	9 ft	NPT(m) 1" x NPT(m) 1"
243510	1"	1,280 PSI	5,075 PSI	10 ft	NPT(m) 1" x NPT(m) 1"
243511	1"	1,280 PSI	5,075 PSI	15 ft	NPT(m) 1" x NPT(m) 1"
243512	1"	1,280 PSI	5,075 PSI	20 ft	NPT(m) 1" x NPT(m) 1"



CONTROL HANDLE - HIGH-FLOW WITH RIGID SPOUT

TECHNICAL DATA		
250275		
250270 - 1" NPT(f) Handle		
250271 - Rigid Spout		
1" NPT(f) with Swivel		
Up to 15 GPM		
1,000 PSI		

Typical Applications


- Automotive dealerships
- · Service shops
- · Lube trucks
- Mining

- · Fleet service facilities
- · Oil transfer
- · Farm/Agriculture
- · Industrial application

- · Heavy-duty dealerships
- · Fast lube centers



CONTROL HANDLE - HIGH-FLOW WITH FLEXIBLE SPOUT

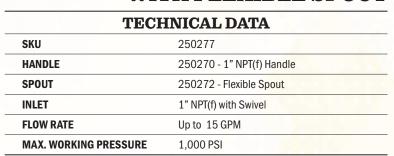

Typical Applications

- · Automotive dealerships
- · Service shops
- · Lube trucks
- Mining

- Fleet service facilities
- · Oil transfer
- Farm/Agriculture
- · Industrial application

- · Heavy-duty dealerships
- · Fast lube centers

CONTROL HANDLE - HIGH-FLOW WITH RIDIG SPOUT AND METER

TECHNICAL DATA		
SKU	202301	
BATTERY	2 x AAA	
INLET	3/4" NPT(f) with Swivel	
FLOW RATE	Up to 15 GPM	
MAX. WORKING PRESSURE	1,000 PSI	

Typical Applications

- · Automotive dealerships · Fleet service facilities
- · Service shops
- · Lube trucks • Farm/Agriculture
- Mining

- · Heavy-duty dealerships
- · Fast lube centers

· Oil transfer













260062

* Due to the viscosity, to use with Diesel the calibration must be redone.



202103



202102



DIGITAL PRESET OIL CONTROL HANDLE

TECHNICAL DATA	
SKU	260062
FLOW RATE	Up to 8 GPM
MAX. WORKING PRESSURE	1,000 PSI
INLET	1/2" NPT(f) with Swivel
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MIN. PRESET QTY.	0.10 Unit
MAX. PRESET QTY.	99.9 Unit
MAX. VISCOSITY	5,000 CST
WATER RESISTANCE	IP55
MEASURING SYSTEM	Oval Gear

Typical Applications

- Automotive dealerships
- · Service shops
- Lube trucks

- Fleet service facilities
- · Fast lube centers
- Farm/Agriculture

- · Heavy-duty dealerships
- Mining
- Industrial application

MECHANICAL PRESET OIL CONTROL HANDLE

TECHNICAL DATA	
SKU	202103
FLOW RATE	Up to 8 GPM
MAX. WORKING PRESSURE	1,450 PSI
INLET	1/2" NPT(f) with Swivel
OUTLET	1/2" NPT(f)
MEASURING DIAL	60 Quarts
ACCURACY	+/- 0.65%

Typical Applications

- Automotive dealerships
- · Service shops
- Lube trucks

- Fleet service facilities
- · Fast lube centers
 - Farm/Agriculture
- · Heavy-duty dealerships
- Mining
- · Industrial application

MECHANICAL PRESET OIL CONTROL HANDLE

TECI	TECHNICAL DATA	
SKU	202102	
FLOW RATE	Up to 8 GPM	
MAX. WORKING PRESSURE	1,450 PSI	
INLET	1/2" NPT(f) with Swivel	
OUTLET	1/2" NPT(f)	
MEASURING DIAL	12 Quarts	
ACCURACY	+/- 0.65%	

Typical Applications

- · Automotive dealerships
- · Service shops
- · Lube trucks

- · Fleet service facilities
- · Fast lube centers
- Farm/Agriculture

- · Heavy-duty dealerships
- Mining
- · Industrial application



DIGITAL OIL CONTROL HANDLE FLEXIBLE SPOUT

TECHNICAL DATA		
SKU	250250	
FLOW RATE	Up to 9.2 GPM	
SPOUT	250258 - Flexible Spout	
INLET	1/2" NPT(f) with Swivel	
ACCURACY	+- 0.5%	
MEASURING UNITS	Gallons, Liters, Quarts and Pints	
MAX. WORKING PRESSURE	1,015 PSI	

Typical Applications

- Automotive dealerships
- · Service shops
- Lube trucks

- Fleet service facilities
- · Fast lube centers
- · Farm/Agriculture

- Heavy-duty dealerships
- Mining
- · Industrial application

DIGITAL OIL CONTROL HANDLE RIGID SPOUT

TECHNICAL DATA	
SKU	250251
FLOW RATE	Up to 9.2 GPM
SPOUT	250002 - Rigid Spout
INLET	1/2" NPT(f) with Swivel
ACCURACY	+- 0.5%
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MAX. WORKING PRESSURE	1,015 PSI

Typical Applications

- Automotive dealerships
- Service shops
- · Lube trucks
- · Fleet service facilities
- · Fast lube centers
- Farm/Agriculture

- · Heavy-duty dealerships
- Mining
- Industrial application

MECHANICAL OIL CONTROL HANDLE - FLEXIBLE SPOUT

TECHNICAL DATA	
SKU	250422
FLOW RATE	Up to 7 GPM
SPOUT	250001 - Flexible Spout
INLET	1/2" NPT(f) with Swivel
ACCURACY	+- 1%
MAX. WORKING PRESSURE	1,015 PSI

Typical Applications

- · Automotive dealerships
- · Service shops
- · Lube trucks

- · Fleet service facilities
- · Fast lube centers
- Farm/Agriculture

- Heavy-duty dealerships
- Mining
- · Industrial application





250421

MECHANICAL OIL CONTROL HANDLE - RIGID SPOUT

TECHNICAL DATA	
SKU	250421
FLOW RATE	Up to 7 GPM
SPOUT	250002 - RIGID Spout
INLET	1/2" NPT(f) with Swivel
ACCURACY	+- 1%
MAX. WORKING PRESSURE	1,015 PSI

Typical Applications

- · Automotive dealerships
- · Service shops
- · Lube trucks

- Fleet service facilities
- · Fast lube centers
- Farm/Agriculture
- Heavy-duty dealerships
- Mining
- Industrial application













250253









250404





250405

OIL CONTROL HANDLE FLEXIBLE SPOUT

TECHNICAL DATA	
SKU	250252
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET	1/2" NPT(f) with Swivel

OIL CONTROL HANDLE RIGID SPOUT

TECHNICAL DATA	
SKU	250253
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET	1/2" NPT(f) with Swivel

OIL CONTROL HANDLE FLEXIBLE SPOUT

TECHNICAL DATA	
SKU	250404
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET	1/2" NPT(f) with Swivel

OIL CONTROL HANDLE RIGID SPOUT

TECHNICAL DATA		
SKU	250405	
FLOW RATE	Up to 9.2 GPM	
MAX. WORKING PRESSURE	1,015 PSI	
INLET	1/2" NPT(f) with Swivel	

OIL CONTROL HANDLE

TECHNICAL DATA		
SKU	250270	
FLOW RATE	Up to 15 GPM	
MAX. WORKING PRESSURE	1,015 PSI	
INLET	1" NPT(f) with Swivel	
OUTLET	1/2" NPT(f)	



THE STATE OF THE S

250270

OIL CONTROL HANDLE

TECHNICAL DATA			
SKU 250259			
FLOW RATE	Up to 9.2 GPM		
MAX. WORKING PRESSURE	1,015 PSI		
INLET	1/2" NPT(f) with Swivel		
OUTLET	1/2" NPT(f)		
		_	





OIL CONTROL HANDLE

TECHNICAL DATA		
250401		
Up to 9.2 GPM		
1,015 PSI		
1/2" NPT(f) with Swivel		
1/2" NPT(f)		





250401

1/2" RIGID SPOUT - AUTO. TIP

TECHNICAL DATA		
SKU	250271	
INLET	1/2" NPT(m)	





1/2" FLEXIBLE SPOUT - AUTO TIP





1/2" FLEXIBLE SPOUT - AUTO. TIP

TECHNICAL DATA		
SKU	250001	
INLET	1/2" NPT(m)	





1/2" RIGID SPOUT - AUTO. TIP

TECHNICAL DATA		
SKU	250002	
INLET	1/2" NPT(m)	





1/2" FLEXIBLE SPOUT - AUTO. TIP

	TECHNICAL DATA
SKU	250258
INLET	1/2" NPT(m)









250000



DIGITAL OIL METER - 1/2"



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture

TECHNICAL DATA	
SKU	250000
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET / OUTLET	1/2" NPT(f)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
BATTERY	1 x Lithium CR123A
MAX. WORKING TEMP.	122° F



DIGITAL OIL METER - 1/2"



Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops
- Lube trucks
- · Farm/Agriculture

TECHNICAL DATA		
SKU	260061	
FLOW RATE	Up to 7.8 GPM	
MAX. WORKING PRESSURE	1,015 PSI	
INLET / OUTLET	1/2" NPT(f)	
MEASURING UNITS	Gallons, Liters, Quarts and Pints	
MEASURING SYSTEM	Oval Gear	
BATTERY	2 x AAA	
MAX. WORKING TEMP.	122° F	





260061

250419



MECHANICAL OIL METER - 1/2"



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture

TECHNICAL DATA		
SKU	250419	
FLOW RATE	Up to 7.8 GPM	
MAX. WORKING PRESSURE	1,015 PSI	
INLET / OUTLET	1/2" NPT(f)	
MEASURING UNITS	Gallons	
MEASURING SYSTEM	Oval Gear	
MAX, WORKING TEMP.	122° F	



DIGITAL OIL METER - 3/4"



250505



Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops
- · Lube trucks
- Farm/Agriculture
- Mining
- · Industrial application



TECHNICAL DATA SKU 250505 **FLOW RATE** Up to 21 GPM **MAX. WORKING PRESSURE** 725 PSI **INLET / OUTLET** 3/4" NPT(f) **MEASURING UNITS** Gallons, Liters, Quarts and Pints **MEASURING SYSTEM** Oval Gear **BATTERY** 1 x CR2 (3V) MAX. WORKING TEMP. 122° F

MANUAL OIL PUMP - LEVER ACTION - FOR 5 GAL PAIL



Product Brief

Pump designed for transferring transmission differentials & heavier oils. Zinc plated pump body with aluminum die cast head & adjusting flange.

Powder coated steel drum cover. Wear resistant brass piston rings fitted onto zinc die cast piston

Complete with 4 ft fuel resistant soft PVC hose with nozzle for efficient discharge.

WETTED COMPONENTS

Steel, Aluminum, Zinc, Brass, NBR, PVC.

RECOMMENDED USE

Transmission differentials & heavier oils.

DO NOT USE

Water based & other corrosive fluids.

TECHNICAL DATA		
SKU	201005	
FLOW RATE	Up to 2.2 oz per stroke	
HOSE	PVC hose 4 ft	



- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture




201005

SUITABLE FOR:



MANUAL OIL PUMP - LEVER



Product Brief

Pump designed for transferring transmission differentials & heavier oils. Zinc plated pump body with aluminum die cast head & adjusting flange.

Powder coated steel drum cover. Wear resistant brass piston rings fitted onto zinc die cast piston

Complete with 4 ft fuel resistant soft PVC hose with nozzle for efficient discharge.

WETTED COMPONENTS

Steel, Aluminum, Zinc, Brass, NBR, PVC.

RECOMMENDED USE

Transmission differentials & heavier oils.

DO NOT USE

Water based & other corrosive fluids.

TECHNICAL DATA		
SKU	201016	
FLOW RATE	Up to 2.2 oz per stroke	
HOSE	PVC hose 4 ft	



Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

SUITABLE FOR:











- · Fleet service facilities
- Service shops
- · Farm/Agriculture

SUITABLE FOR:



201001

MANUAL OIL PUMP - LEVER **ACTION - FOR 55 GAL DRUM**

Product Brief

Most popular pump engineered for professional use; with premium powder-coated steel pump body and with a ribbed section aluminum die-cast pump head for maximum strength. Built-in 1.1/2" and 2" bung for use on drums with either opening. Plated steel lever handle with rubber grip for convenience. Wear-resistant brass piston rings fitted onto zinc die-cast piston. Comes complete with curved metal spout and telescopic suction tube for use on 16 gallon - 55 gallons drums.

WETTED COMPONENTS

Steel, Aluminum, Zinc, Brass, NBR.

RECOMMENDED USE

Antifreeze, solvents, thinners, automotive additives, oil based fluids & other non corrosive liquids.

DO NOT USE

Gasoline, water based, and other corrosive fluids.

TECHNICAL DATA	
SKU	201001
FLOW RATE	Up to 10 oz per stroke







MANUAL OIL PUMP - LEVER ACTION - FOR 55 GAL DRUM

Product Brief

An extremely rugged and strong all steel pump designed specifically for use with Diesel and E85 fuels. Constructed from selected materials which are compatible with Bio Diesel and E85 fuel. Fracture proof design with steel pump head and bung. Extra-long pump body makes it easy to place refill containers on the drum for convenient dispensing. Comes complete with curved metal spout and telescopic suction tube for use on 16 gallon - 55 gallons drums.

WETTED COMPONENTS

Steel, Viton & PTFE.

RECOMMENDED USE

Oil based fluids, Bio Diesel & E85 fuels.

DO NOT USE

With Corrosive fluids, solvents, acids, alkalis etc.

TECHNICAL DATA	
SKU	300401
FLOW RATE	Up to 10 oz per stroke

Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

SUITABLE FOR:



MANUAL OIL PUMP ROTARY - FOR 55 GAL DRUM

Product Brief

The most popular pump used worldwide. This Rotary Pump is superior with features such as Dual Directional Operation which allows the pump to empty and refill containers. Extremely Heavy Duty; this pump's body is sturdy cast iron with precisely machined cast iron vanes for a better draw and smoother delivery. Fits 16 gallons to 55 gallons drum. Comes complete with a suction tube, 2" cast iron bung adaptor and discharge spout.

WETTED COMPONENTS

Steel, Cast Iron, NBR.

RECOMMENDED USE

For dispensing Diesel, Kerosene, Heating Oils, Motor Oils, Lubricating Oils (up to SAE 90), and other non-corrosive fluids.

DO NOT USE

With water based fluids, Antifreeze, Solvents, Acids, and Gasoline.

TECHNICAL DATA		
SKU	201101	
FLOW RATE	Up to 1.3 GAL per 5 strokes	



SUITABLE FOR:



201101

MANUAL OIL PUMP **ROTARY - PROFESSIONAL** FOR 55 GAL DRUM

Product Brief

Rotary barrel pump with aluminum die-cast pump body, heavy-duty zinc die-cast rotor and vanes ideal for use in industrial and automotive applications. Includes a 2" Cast Iron bung adaptor and die-cast aluminum handle with security locking latch. Complete with a 3-pc threaded suction tube for use on 16 gallons to 55 gallons drum.

WETTED COMPONENTS

Aluminum, Zinc, Steel, NBR/Viton & PVC.

RECOMMENDED USE

Gasoline, Diesel fuel, Kerosene, & Lubricating oils up to SAE 60.

DO NOT USE

With Corrosive liquids, Solvents, Acids, Alkalis etc.

TECHNICAL DATA		
SKU	201201	
FLOW RATE	Up to 2.2 oz per stroke	





Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

SUITABLE FOR:







MANUAL OIL PUMP - ROTARY **FOR 55 GAL DRUM**

Product Brief

The industry standard rotary pumps; these are by far the heaviest duty pumps, ideal for tough outdoor use in extreme weather conditions. Solid cast iron construction, fully CNC machined to close tolerances. Pump handle rotates a high-quality sintered powder metal, 3 vane rotors inside a highly finished pumping chamber. Graphite Vanes are self-lubricating and non-wearing. High-quality graphite seal, self-priming, supplied complete with 2" Bung, Telescopic Suction Tube with Strainer for use with 16 gallon - 55 gallons drums.

WETTED COMPONENTS

Cast Iron, Steel, Graphite, Paper, Polypropylene.

RECOMMENDED USE

Petroleum base fluids, Diesel & Kerosene.

DO NOT USE

With water based fluids.

TECHNICAL DATA	
SKU	300201
FLOW RATE	Up to 10 GPM
HOSE	8 ft - 3/4" with Spout

MANUAL OIL PUMP - ROTARY FOR 55 GAL DRUM

Product Brief

The industry standard rotary pumps; these are by far the heaviest duty pumps, ideal for tough outdoor use in extreme weather conditions. Solid cast iron construction, fully CNC machined to close tolerances. Pump handle rotates a high-quality sintered powder metal, 3 vane rotors inside a highly finished pumping chamber. Graphite Vanes are self-lubricating and non-wearing. High-quality graphite seal, self-priming, supplied complete with 2" Bung, Telescopic Suction Tube with Strainer for use with 16 gallon - 55 gallons drums.

WETTED COMPONENTS

Cast Iron, Steel, Graphite, Paper, Polypropylene.

RECOMMENDED USE

Petroleum base fluids. Diesel & Kerosene.

DO NOT USE

With water based fluids.

TECHNICAL DATA		
SKU	300301	
FLOW RATE	Up to 10 GPM	







SUITABLE FOR:







Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

SUITABLE FOR:



MANUAL OIL PUMP ROTARY - FOR 55 GAL DRUM

Product Brief

A range of special applications pump designed for use with fluids that cannot be pumped using a regular cast-iron or steel pump.

Pump body and handle are constructed using glass-filled

Polypropylene'. Vanes made of Ryton. Complete with 3-pc threaded suction tube for use on 16 gallons to 55 gallons drums.

WETTED COMPONENTS

Polypropylene, Ryton, Viton.

RECOMMENDED USE

For Lubricating oils, Acids, Chemicals, Water based media, antifreeze, detergents, Urea, Adblue, DEF, Benzene, Glycerine.

DO NOT USE

Acetone, Lacquer, Mineral Oils, Solvents, Turpentine.

TECHNICAL DATA		
SKU	201501	
FLOW RATE	Up to 1.3 GAL per 10 strokes	









Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- · Service shops
- Farm/Agriculture

SUITABLE FOR:





MANUAL OIL PUMP DOUBLE DIAPHRAGM FOR 55 GAL DRUM

Product Brief

Heavy-Duty Fuel Transfer pump, ideal for use where compressed air/electricity is not easily available such as farms or ranches, construction sites, boat, etc. Stainless Steel Piston and fuel resistant nitrile rubber diaphragm Include a 2" die cast bung adaptor and extra heavy-duty steel handle with security locking latch. Pump inlet fitted with easy to clean wire mesh screen. Complete with a telescopic suction tube with a non-return valve to use on 16 gallons to 55 gallons drum.

WETTED COMPONENTS

Aluminum, Steel, Stainless Steel, Poly Acetal & NBR.

RECOMMENDED USE

Gasoline, Diesel fuel, Fuel Oil, Motor Oil & other light petroleum products.

DO NOT USE

With Corrosive liquids, solvents, acids, alkalis etc.

TECHNICAL DATA	
SKU	300101
FLOW RATE	Up to 1 GAL per 5 strokes





- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- · Service shops
- Farm/Agriculture

SUITABLE FOR:







201801

MANUAL OIL PUMP **QUART / STROKE** FOR 55 GAL DRUM

Product Brief

A heavy-duty and economical way to dispense the exact quantity of fluid per stroke. Extremely useful in applications requiring metered delivery, the pump works on a precision rack and pinion mechanism. The pump has a built-in 2" Bung Adaptor and comes complete with a telescopic suction tube for use with 16 gallons - 55 gallons drum. Spring-loaded drain back tube for overflown fluid, a lockable handle which allows the pump to be padlocked when it is not in use, lock nut for positioning the pump outlet in any direction.

WETTED COMPONENTS

Steel, Aluminum, Nitrile Rubber & Acetal.

RECOMMENDED USE

Gear & Lube Oil, Petroleum based fluid, Diesel & Kerosene.

DO NOT USE

With water based & other corrosive fluids.

TECHNICAL DATA		
SKU	201801	
FLOW RATE	Up to 1 Quart per stroke	

SUITABLE FOR:

Service shops

Farm/Agriculture



MANUAL OIL PUMP VERTICAL LIFT FOR 55 GAL DRUM

Product Brief

Self-priming high-volume vertical lift pump for use with petroleum-based fluids. Steel construction with aluminum die-cast head, steel plunger rod and PTFE seals. The piston is made from zinc with wear-resistant brass piston rings. Complete with 2" cast iron bung adaptor tube with strainer for use with 55 gallons drums.

WETTED COMPONENTS

Steel, Aluminum, Zinc, Brass & PTFE.

RECOMMENDED USE

High viscosity petroleum based fluids, lacquer thinners.

DO NOT USE

With Gasoline, water based & other corrosive fluids.

TECHNICAL DATA	
SKU	201301
FLOW RATE	Up to 26 oz per stroke



MANUAL OIL PUMP **FOR 55 GAL DRUM**





Self-priming vertical lift pump designed for use with antifreeze, detergents, etc. Polypropylene construction with steel plunger rod and Viton seals. Complete with 2" polypropylene bung adaptor for use on 55 gallons drum.



WETTED COMPONENTS

Polypropylene, Steel & Viton.

RECOMMENDED USE

For Lubricating oils, Antifreeze, detergents, windshield fluids, glycerine, mild acids, petroleum based fluids.

DO NOT USE

With strong acids, lacquers, acetone, gasoline.

TECHNICAL DATA		
SKU	201601	
FLOW RATE	Up to 14 oz per 1 stroke	

Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture

SUITABLE FOR:



201601

MANUAL OIL PUMP



Product Brief

The self-priming vertical lift pump is designed primarily for use with lacquer thinners, urea, AdBlue, DEF, etc. Nylon construction with stainless steel plunger rod and PTFE seals. Complete with 2" polypropylene bung adapter and a suction tube with a non-return valve to use on 55 gallons drum.



Nylon, Polypropylene, Stainless Steel & PTFE.

RECOMMENDED USE

With motor Oil, lacquer thinners, Acetone, Antifreeze, Brake Kleen, Detergents, Glycerine, Water, Weed Killer, mild acids, AdBlue, Urea, DEF, petroleum based fluids.

DO NOT USE

With strong acids, bleach, gasoline.

TECHNICAL DATA		
SKU	201701	
FLOW RATE	Up to 14 oz per stroke	









Typical Applications

- Automotive dealerships
- Fast lube centers
- · Fleet service facilities
- · Service shops
- Farm/Agriculture

SUITABLE FOR:





201402

MANUAL OIL PUMP **FOR 5 GAL PAIL**

Product Brief

Downstroke operation with fluid discharge when pushing the handle down. Enhanced ease of use and reduced fatigue especially when pumping heavy fluids. It additionally reduces pull out stress on the pump bung. Heavy-duty steel suction tube, with the pump head made from high-density polyethylene.

WETTED COMPONENTS

Steel, Aluminum, Polyethylene, Polypropylene Co Polymer, High Nitrile Rubber, PVC & Acetal.

RECOMMENDED USE

Engine oils, gear oils, Diesel and light fuel oil.

DO NOT USE

SUITABLE FOR:

5 GAL

With water based & other corrosive fluids.

TECHNICAL DATA	
SKU	201402
FLOW RATE	Up to 1 Quart per stroke

TRANSFER GUN

Product Brief

Dual direction transfer gun draws in and pumps out the liquid in a single stroke. Suction head and piston have an aluminum construction and use Viton piston rings.

RECOMMENDED USE

Fuel oils, Mineral oils, Synthetic & Biological oils, Petrol, Cooling liquids, Water, Antifreeze, Spirits & Brake fluids.

TECHNICAL DATA	
SKU	200701
CAPACITY	12 oz
HOSE	2 pieces of 4 ft clear vinyl hose



SUCTION GUN

TECHNICAL DATA	
200601	
16 oz	
Non corrosive liquids	
12" clear vinyl hose	

OIL SAMPLER VACUUM PUMP NYLON HEAD

Product Brief

The oil sampler vacuum pump is designed primarily for collecting oil samples, featured with a pressure release valve, avoids contamination during the sampling process, making it easier, cleaner and safer.

DO NOT USE

With strong acids, lacquers, acetone, gasoline.

Typical Applications

- Automotive dealerships
- Mining
- Heavy-duty dealerships
- Industrial application
- · Fast lube centers
- Farm/Agriculture
- Fleet service facilities
- · Service shops

SKU	256591
RELEASE VALVE	Yes

* Container and hose are not included but they are available separately

256591

OIL SAMPLER VACUUM PUMP CLEAR ACRYLIC HEAD

Product Brief

The oil sampler vacuum pump is designed primarily for collecting oil samples, featured with a pressure release valve, avoids contamination during the sampling process, making it easier, cleaner and safer.

DO NOT USE

With strong acids, lacquers, acetone, gasoline.

Typical Applications

- · Automotive dealerships
- Mining
- Heavy-duty dealerships
- Industrial application
- Fast lube centers
- Farm/Agriculture
- Fleet service facilities
- Service shops

TECHNICAL DATA

SKU	256599
RELEASE VALVE	No

* Container and hose are not included but they are available separately

256599

OIL SAMPLER CLEAR BOTTLE

TECHNICAL DATA		
SKU	256592	
TO USE WITH	256591 and 256599	



OLFLURE

253602



AIR OPERATED OIL SUCTION AND DRAIN UNIT WITH 23.8 GAL TANK CAPACITY

TECH	NICAL DATA
SKU	253602
TANK CAPACITY	23.8 GAL
BOWL CAPACITY	5.3 GAL
PRE-CHAMBER CAPACITY	2.6 GAL
PROBES	250029 - 10 Standard Probes
MAX. HEIGHT	6 ft
MAX. PRESSURE	116 PSI
MAX. SUCTION CAPACITY	17.2 GAL
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	90 lbs



AIR OPERATED OIL SUCTION AND DRAIN UNIT WITH 31.7 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	250808
TANK CAPACITY	31.7 GAL
BOWL CAPACITY	5.3 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. HEIGHT	5.8 ft
MAX. PRESSURE	116 PSI
MAX. SUCTION CAPACITY	23.8 GAL
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	75 lbs

The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).


AIR OPERATED OIL SUCTION AND DRAIN UNIT WITH 23.8 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	250807
TANK CAPACITY	23.8 GAL
B <mark>owl Capacity</mark>	5.3 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. HEIGHT	6 ft
MAX. PRESSURE	116 PSI
MAX. SUCTION CAPACITY	17.2 GAL
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	81 lbs



Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture






AIR OPERATED OIL SUCTION AND DRAIN UNIT 17.2 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	253605
TANK CAPACITY	17.2 GAL
BOWL CAPACITY	4 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. HEIGHT	5 ft
MAX. PRESSURE	116 PSI
MAX. SUCTION CAPACITY	11.9 GAL
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	67 lbs



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture





The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

Typical Applications • Automotive dealerships • Heavy-duty dealerships • Fast lube centers • Fleet service facilities • Service shops • Farm/Agriculture

OIL DRAIN UNIT WITH RECOVERY BASIN 31.7 GAL TANK CAPACITY

TECH	NICAL DATA
SKU	250814
TANK CAPACITY	31.7 GAL
BOWL CAPACITY	5.3 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	(Without Probes)
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	66 lbs

Typical Applications • Automotive dealerships • Heavy-duty dealerships • Fast lube centers • Fleet service facilities • Service shops • Farm/Agriculture

OIL DRAIN UNIT WITH RECOVERY BASIN 23.8 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	253603
TANK CAPACITY	23.8 GAL
BOWL CAPACITY	5.3 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	(Without Probes)
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	72 lbs

The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).


OIL DRAIN UNIT WITH RECOVERY BASIN 23.8 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	253609
TANK CAPACITY	23.8 GAL
BOWL CAPACITY	4 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	(Without Probes)
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	65 lbs



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture





253609


OIL DRAIN UNIT WITH RECOVERY BASIN 17.2 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	253607
TANK CAPACITY	17.2 GAL
BOWL CAPACITY	4 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	(Without Probes)
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
HOSE EMPTING LENGTH	6 ft
WEIGHT	60 lbs



Typical Applications

- · Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture





253607

The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).





PORTABLE OIL DRAIN UNIT WITH RECOVERY BASIN

TEC	HNICAL DATA
<mark>sku</mark>	250815
USED WITH	55 Gal Drum
BOWL CAPACITY	5.3 GAL
TROLLEY	250066 - Four Wheels Trolley
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	Yes
BUNG ADAPTOR	2" BSP(m)
WEIGHT	100 lbs



250815





Typical Applications

- · Automotive dealerships
- . Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



203609

ROTOMOLDED OIL DRAIN **UNIT WITH** 31.7 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	203609
TANK CAPACITY	31.7 GAL
BOWL CAPACITY	5.3 GAL
MAX. HEIGHT	6 ft
MIN. HEIGHT	4 ft
ANTI-SPLASH GRID	No
OUTLET	1/2" Quick Connec
WEIGHT	55 lbs

The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).


OIL DRAIN UNIT WITH RECOVERY BASIN


TECHNICAL DATA		
SKU	250817	
USED WITH	55 Gal Drum	
BOWL CAPACITY	5.3 GAL	
MAX. HEIGHT	6 ft	
MIN. HEIGHT	4 ft	
ANTI-SP <mark>LASH GRID</mark>	Yes	
BUNG ADAPTOR	BSP(m)	
WEIGHT	18 lbs	



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- · Fleet service facilities
- Service shops
- Farm/Agriculture







* Drum not included. 250817


OIL DRAIN UNIT WITH RECOVERY BASIN

TEC	CHNICAL DATA	
SKU	250816	
USED WITH	55 Gal Drum	
BOWL CAPACITY	4 GAL	
MAX. HEIGHT	6 ft	
MIN. HEIGHT	4 ft	
ANTI-SPLASH GRID	Yes	
BUNG ADAPTOR	BSP(m)	
WEIGHT	11 lbs	



Typical Applications

- · Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture






* Drum not included. 250816


The air-operated oil suction drainers are ideal for a rapid change of motor oil in every vehicle. The recovery of the exhausted oil happens for gravity, through the lateral basin with adjustable height and for aspiration through the probes. The units can suck till 2/3 of their capacity. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

Typical Applications



- · Heavy-duty dealerships
- · Fast lube centers
- Fleet service facilities
- · Service shops
- Farm/Agriculture





AIR OPERATED OIL SUCTION WITH PRE-CHAMBER 31.7 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	250811
TANK CAPACITY	31.7 GAL
MAX. SUCTION CAPACITY	23.8 GAL
PRE-CHAMBER CAPACITY	2.6 GAL
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	69 lbs



250811

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- · Fleet service facilities
- · Service shops
- Farm/Agriculture





AIR OPERATED OIL SUCTION WITH PRE-CHAMBER

23.8 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	253604
TANK CAPACITY	23.8 GAL
MAX. SUCTION CAPACITY	17.2 GAL
PRE-CHAMBER CAPACITY	2.6 GAL
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	73 lbs



- Fleet service facilities
- Service shops






253606

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers

- Farm/Agriculture



AIR OPERATED OIL SUCTION WITH PRE-CHAMBER 17.2 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	253606
TANK CAPACITY	17.2 GAL
MAX. SUCTION CAPACITY	11.9 GAL
PRE-CHAMBER CAPACITY	2.6 GAL
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	67 lbs

The air-operated oil suction drainers are ideal for a rapid motor oil change. The procedure happens by aspiration through the probes. Pressurization allows for regular work mechanism without the necessity of continuous flow of compressed air, an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suck up to 2/3 of the tank capacity. The pre-chamber allows the immediate control of quantity and quality of the aspirated oil, it is equipped with a device for the internal cleaning. Oil temperature must be within 140° - 170°F (when the engine is just switched off).




AIR OPERATED **OIL SUCTION/ASPIRATOR** 31.7 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	250805
TANK CAPACITY	31.7 GAL
MAX. SUCTION CAPACITY	23.8 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	59 lbs

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture





250805

AIR OPERATED **OIL SUCTION/ASPIRATOR** 23.8 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	250803
TANK CAPACITY	23.8 GAL
MAX. SUCTION CAPACITY	17.2 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	64 lbs



- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- Service shops
- Farm/Agriculture






250803

AIR OPERATED OIL SUCTION/ASPIRATOR 17.2 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	253608
TANK CAPACITY	17.2 GAL
MAX. SUCTION CAPACITY	11.9 GAL
PRE-CHAMBER CAPACITY	(Without Pre-Chamber)
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
WEIGHT	56 lbs





- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture





253608

The air-operated oil suction drainers are ideal for a rapid motor oil change. The procedure happens by aspiration through the probes. Pressurization allows for regular work mechanism without the necessity of continuous flow of compressed air, an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suck up to 2/3 of the tank capacity. The pre-chamber allows the immediate control of quantity and quality of the aspirated oil, it is equipped with a device for the internal cleaning. Oil temperature must be within 140° - 170°F (when the engine is just switched off).






250802



- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture




AIR OPERATED **OIL SUCTION/ASPIRATOR 6.3 GAL TANK CAPACITY**


TECHNICAL DATA	
sku	250802
TANK CAPACITY	6.3 GAL
MAX. SUCTION CAPACITY	4.2 GAL
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
EMPTING SYSTEM	Air Operated
HOSE EMPTING LENGTH	6 ft
WEIGHT	30 lbs





- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture





AIR OPERATED **OIL SUCTION/ASPIRATOR 6.3 GAL TANK CAPACITY**

TECHNICAL DATA	
SKU SKU	253601
TANK CAPACITY	6.3 GAL
MAX. SUCTION CAPACITY	4.2 GAL
PROBES	250029 - 10 Standard Probes
MAX. PRESSURE	116 PSI
EMPTING SYSTEM	Manual
HOSE EMPTING LENGTH	(Without Hose)
WEIGHT	28 lbs

The air-operated oil suction drainers are ideal for a rapid motor oil change. The procedure happens by aspiration through the probes. Pressurization allows for regular work mechanism without the necessity of continuous flow of compressed air, an independent and quick aspiration, using the suitable probe between the included kit of 10 probes. The units can suck up to 2/3 of the tank capacity. The pre-chamber allows the immediate control of quantity and quality of the aspirated oil, it is equipped with a device for the internal cleaning. Oil temperature must be within 140° - 170°F (when the engine is just switched off).

Do not use with brake oils, fuels, inflammable and corrosive liquids

AIR OPERATED **OIL SUCTION/ASPIRATOR** 31.7 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	250903
TANK CAPACITY	31.7 GAL
OUTLET (EMPTING)	1:1 Pump - 3/4" Outlet Thread
ADJUSTABLE WHEELS	From 31.5" to 47.2"
WEIGHT	95 lbs



- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- · Fleet service facilities
- · Service shops

250903



AIR OPERATED OIL SUCTION/ASPIRATOR **31.7 GAL TANK CAPACITY**

TECHNICAL DATA	
SKU	255001
TANK CAPACITY	31.7 GAL
OUTLET (EMPTING)	3/4" NPT(f) Ball Valve
ADJUSTABLE WHEELS	From 31.5" to 47.2"
WEIGHT	81 lbs



255001

Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops



AIR OPERATED OIL SUCTION/ASPIRATOR 23.8 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	255005
TANK CAPACITY	23.8 GAL
OUTLET (EMPTING)	3/4" NPT(f) Ball Valve
ADJUSTABLE WHEELS	From 31.5" to 47.2"
WEIGHT	79 lbs





Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops



255005



Exhausted oil wheeled drain units are suitable for draining motor oils, transmissions, antifreeze, and non-corrosive fluids. The tanks are equipped with breakwater, anti-reflux grate and anti-splash grid, ideal for draining used oil filters. Wasted/Exhausted oil can be transferred from the tank/drainer to the properly wasted oil tank.

S TO TO THE PARTY OF THE PARTY

WHEELED OIL DRAIN UNIT 53 GAL CAPACITY


	MEGITATICAL DAMA
TECHNICAL DATA	
SKU	255002
TANK CAPACITY	53 GAL
OUTLET	3/4" NPT(f) Ball Valve
WHEELS	4 Wheels (2 with swivel)
WEIGHT	188 lbs

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- · Farm/Agriculture



WHEELED OIL DRAIN UNIT 31.7 GAL CAPACITY TECHNICAL DATA

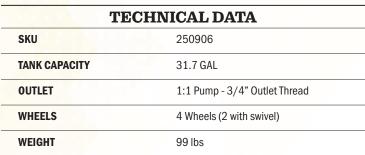

Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Fleet service facilities
- · Service shops
- · Farm/Agriculture



255002



Exhausted oil wheeled drain units are suitable for draining motor oils, transmissions, antifreeze, and non-corrosive fluids. The tanks are equipped with breakwater, anti-reflux grate and anti-splash grid, ideal for draining used oil filters. Wasted/Exhausted oil can be transferred from the tank/drainer to the properly wasted oil tank.

PUMP

SET

HOSE REELS

HOSES

WHEELED OIL DRAIN UNIT 31.7 GAL CAPACITY

TECHNICAL DATA	
255003	
31.7 GAL	
3/4" NPT(f) Ball Valve	
4 Wheels (2 with swivel)	
85 lbs	

255003

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops
- Farm/Agriculture



WHEELED OIL DRAIN UNIT 15.9 GAL CAPACITY

TECHNICAL DATA		
SKU	255004	
TANK CAPACITY	15.9 GAL	
OUTLET	3/4" NPT(f) Ball Valve	
WHEELS	4 Wheels (2 with swivel)	
WEIGHT	76 lbs	

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture





Exhausted oil wheeled drain units are suitable for draining motor oils, transmissions, antifreeze, and non-corrosive fluids. The tanks are equipped with breakwater, anti-reflux grate and anti-splash grid, ideal for draining used oil filters. Wasted/Exhausted oil can be transferred from the tank/drainer to the properly wasted oil tank.








Typical Applications

- Automotive dealerships
- . Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



PORTABLE OIL DISPENSING **UNIT-13.2 GAL CAPACITY**

TECHNICAL DATA	
<mark>sk</mark> u	254431
TANK CAPACITY	13.2 GAL
TANK MATERIAL	Steel
MAX. FILLING CAPACITY	10.6 GAL
NOZZLE	250250 - Digital Control Handle
HOSE	10 ft
MAX. PRESSURE	116 PSI
WEIGHT	57 lbs

Recommended for dispensing oil, antifreeze and non-corrosive fluids. The tank must be filled with up to 4/5 (80%) of its capacity and pressurized with up to 116 PSI. This pressure will allow you to dispense without the necessity of the air hose connected.

PORTABLE OIL DISPENSING

TECHNICAL DATA

254430

6.3 GAL

5.1 GAL

250250 - Digital Control Handle

Steel

10 ft

116 PSI

29 lbs

UNIT - 6.3 GAL CAPACITY

254431








Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops



SKU

TANK CAPACITY

TANK MATERIAL

MAX. PRESSURE

NOZZLE

WEIGHT

HOSE

MAX. FILLING CAPACITY

Farm/Agriculture

Recommended for dispensing oil, antifreeze and non-corrosive fluids. The tank must be filled with up to 4/5 (80%) of its capacity and pressurized with up to 116 PSI. This pressure will allow you to dispense without the necessity of the air hose connected.



PORTABLE OIL DISPENSING **UNIT-13.2 GAL CAPACITY**

TECHNICAL DATA	
SKU	260129
TANK CAPACITY	13.2 GAL
TANK MATERIAL	Steel
MAX. FILLING CAPACITY	10.6 GAL
NOZZLE	250404 - Control Handle
HOSE	10 ft
MAX. PRESS <mark>ure</mark>	116 PSI
WEIGHT	55 lbs

Recommended for dispensing oil, antifreeze and non-corrosive fluids. The tank must be filled with up to 4/5 (80%) of its capacity and pressurized with up to 116 PSI. This pressure will allow you to dispense without the necessity of the air hose connected.



Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



PORTABLE OIL DISPENSING **UNIT-6.3 GAL CAPACITY**

TECHNICAL DATA	
SKU	260130
TANK CAPACITY	6.3 GAL
TANK MATERIAL	Steel
MAX. FILLING CAPACITY	5.1 GAL
NOZZLE	250404 - Control Handle
HOSE	10 ft
MAX. PRESSURE	116 PSI
WEIGHT	27 lbs

Recommended for dispensing oil, antifreeze and non-corrosive fluids. The tank must be filled with up to 4/5 (80%) of its capacity and pressurized with up to 116 PSI. This pressure will allow you to dispense without the necessity of the air hose connected.



Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Farm/Agriculture







PORTABLE OIL DISPENSING **UNIT-6.3 GAL CAPACITY**


TECHNICAL DATA	
SKU	250901
TANK CAPACITY	6.3 GAL
TANK MATERIAL	Steel
NOZZLE	250404 - Control Handle
HOSE	10 ft
WEIGHT	32 lbs

Manual oil dispensers with double-acting manual pump, suitable for high viscosity oils (SAE 15-220). They are recommended for dispensing motor oils, transmissions, differential gears, hydraulic power packs, antifreeze and so on. Do not use with corrosive fluids.



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture



PORTABLE OIL DISPENSING **UNIT-6.3 GAL CAPACITY**

TECHNICAL DATA	
SKU	250503
TANK CAPACITY	6.3 GAL
TANK MATERIAL	Steel
NOZZLE	250250 - Digital Control Handle
HOSE	10 ft
WEIGHT	34 lbs

Manual oil dispensers with double-acting manual pump, suitable for high viscosity oils (SAE 15-220). They are recommended for dispensing motor oils, transmissions, differential gears, hydraulic power packs, antifreeze and so on. Do not use with corrosive fluids.


PORTABLE AIR OPERATED **OIL DISPENSING UNIT** 17.2 GAL CAPACITY

TECHNICAL DATA	
SKU	253001
TANK CAPACITY	17.2 GAL
TAN <mark>K MATERIAL</mark>	Steel
PUMP	260026 - Air Operated Pump 3:1 - 6.6 GPM
NOZZLE	250250 - Digital Control Handle
HOSE	10 ft
WEIGHT	68 lbs



Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture





253001

WHEELED OIL DISPENSING **UNIT-4.2 GAL CAPACITY**

TECHNICAL DATA	
SKU	250502
TANK CAPACITY	4.2 GAL
TANK MATERIAL	Steel
SPOUT	Rigid 30° end
HOSE	6 ft
WHEELS	Yes
WEIGHT	31 lbs






Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Fleet service facilities
- · Service shops
- Farm/Agriculture



250502

PORTABLE OIL DISPENSING **UNIT-4.2 GAL CAPACITY**

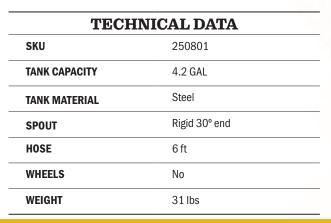





Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops
- · Farm/Agriculture







201205

Typical Applications

- Automotive dealerships
- · Fast lube centers
- Fleet service facilities
- · Service shops
- Farm/Agriculture



=0

OIL DISPENSER MANUAL SYSTEM 4.7 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	201205
TANK CAPACITY	4.7 GAL
PUMP	Manual lever pump
SPOUT	Metal curved spout
HOSE	5 ft - 1/2" clear hose
TROLLEY	No
WEIGHT	12 lbs

Typical Applications

- Automotive dealerships
- · Fast lube centers
- · Fleet service facilities
- Service shops
- Farm/Agriculture



OIL DISPENSER MANUAL SYSTEM 4.7 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	201206
TANK CAPACITY	4.7 GAL
PUMP	Manual lever pump
SPOUT	Metal curved spout
HOSE	5 ft - 1/2" clear hose
TROLLEY	Yes
WEIGHT	16 lbs




201206



Typical Applications

- Automotive dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture






OIL DISPENSER MANUAL SYSTEM 13 GAL TANK CAPACITY

TECHNICAL DATA	
SKU	201213
TANK CAPACITY	13 GAL
PUMP	201001 - Manual lever pump
SPOUT	Metal curved spout
HOSE	5 ft - 1/2" clear hose
TROLLEY	Yes
WEIGHT	24 lbs



201213


OIL DISPENSER WIRELESS SYSTEM

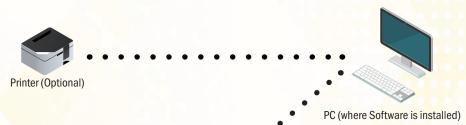

PC

This is where the management software will be installed. The software will be used to manage user, create orders, check tank level, etc.

UP TO 8 MASTER KEYPADS






UP TO 36 ADDITIONAL KEYPADS (DISPENSING PADS)


Additional keypads or dispensing pads are used to start the orders.
They are usually installed in the workplace.



UP TO 250 PRESET NOZZLES

Wireless preset nozzles will dispense only the amount previously set up/released when the order is created in the software/PC.

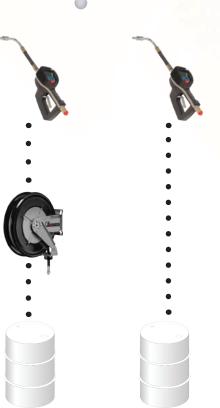

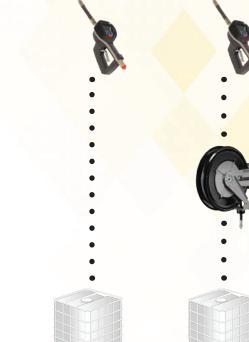

UP TO 16 Different products

The system allows you to manage up to 16 different products/fluids, in up to 250 tanks, drums or totes.



MASTER KEYPAD WIRELESS SYSTEM

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops

TECHNICAL DATA	
SKU	210001
VOLTAGE	115 V
PRINTER	No - Sold separately
WEIGHT	6 lbs



DISPENSING PADS WIRELESS SYSTEM

TECHNICAL DATA	
SKU	210003
VOLTAGE	115 V
PRINTER	No - Sold separately
WEIGHT	5 lbs



WIRELESS DIGITAL NOZZLE FOR WIRELESS SYSTEM

TECHNICAL DATA	
SKU	250416
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET / OUTLET	1/2" NPT(f)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
BATTERY	4 AA Alkaline batteries
WORKING TEMP. RANGE	20° to 122° F



WIRELESS DIGITAL NOZZLE FOR WIRELESS SYSTEM

TECHNICAL DATA	
SKU	250417
FLOW RATE	Up to 9.2 GPM
MAX. WORKING PRESSURE	1,015 PSI
INLET / OUTLET	1/2" NPT(f)
MEASURING UNITS	Gallons, Liters, Quarts and Pints
MEASURING SYSTEM	Oval Gear
BATTERY	4 AA Alkaline batteries
WORKING TEMP. RANGE	20° to 122° F





250416




OIL DISPENSER BAR



Oil dispense bars are always ideal for keeping your work environment clean. Fed by air-operated pumps or with connection to a centralized system/lube room, it offers 12 different configurations to supply all your needs. They are now available with a built-in cabinet, which will improve your workspace making it cleaner and safer. Oil dispenser bar is a great alternative solution for those situations when the installation of hose-reels is not an option and for when you want to make your installation more efficient. It assures a quick and clean dispense without wastes.



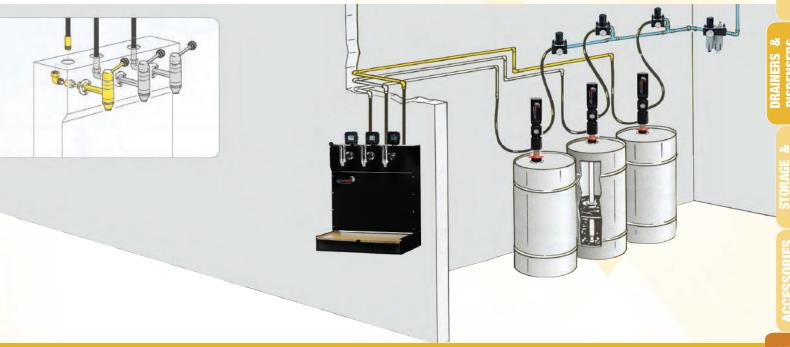





250701





OIL DISPENSER BAR 1 OUTLET WITHOUT METER

TECHNICAL DATA	
SKU	250701
MATERIAL	Steel
METER	No
OUTLET	1 (250019)
WEIGHT	51 lbs

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- · Fleet service facilities
- Service shops
- Industrial applications



250702







OIL DISPENSER BAR 2 OUTLET WITHOUT METER

TECHNICAL DATA		
SKU	250702	
MATERIAL	Steel	
METER	No	
OUTLET	2 (250019)	
WEIGHT	53 lbs	


Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- · Fleet service facilities
- · Service shops
- · Industrial applications



250703

ANTIFREZE



OIL DISPENSER BAR 3 OUTLET WITHOUT METER

	TECHNICAL DATA
SKU	250703
MATERIAL	Steel
METER	No
OUTLET	3 (250019)
WEIGHT	55 lbs

- · Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- · Fleet service facilities
- · Service shops
- · Industrial applications

OIL DISPENSER BAR 1 OUTLET WITH METER

TECHNICAL DATA	
SKU	250704
MATERIAL	Steel
METER	1 (260061)
OUTLET	1 (250019)
WEIGHT	52 lbs

30.7"



250704

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops
- · Industrial applications

OIL DISPENSER BAR 2 OUTLET WITH METER

TECHNICAL DATA		
SKU	250705	
MATERIAL	Steel	
METER	2 (260061)	
OUTLET	2 (250019)	
WEIGHT	55 lbs	

Typical Applications

- · Automotive dealerships
- · Fleet service facilities
- · Heavy-duty dealerships
- · Service shops
- · Fast lube centers
- · Industrial applications

OIL DISPENSER BAR 3 OUTLET WITH METER

TECHNICAL DATA		
SKU	250706	
MATERIAL	Steel	
METER	3 (260061)	
OUTLET	3 (250019)	
WEIGHT	58 lbs	

Typical Applications

- · Automotive dealerships
- · Fleet service facilities

· Service shops

· Heavy-duty dealerships

· Fast lube centers

Industrial applications






250706










Typical Applications



- Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- Service shops
- Industrial applications





OIL DISPENSER BAR WITH CABINET

1 OUTLET WITHOUT METER

TECHNICAL DATA	
SKU	250721
MATERIAL	Steel
METER	No
OUTLET	1 (250019)
WEIGHT	100 lbs



250721

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops
- Industrial applications





WITH CABINET

OIL DISPENSER BAR

2 OUTLET WITHOUT METER

	TECHNICAL DATA	
SKU	250722	
MATERIAL	Steel	
METER	No	
OUTLET	2 (250019)	
WEIGHT	103 lbs	






Typical Applications


- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- · Fleet service facilities
- Service shops











250723



OIL DISPENSER BAR WITH CABINET **3 OUTLET WITHOUT METER**

	TECHNICAL DATA
SKU	250723
MATERIAL	Steel
METER	No
OUTLET	3 (250019)
WEIGHT	106 lbs

OIL DISPENSER BAR WITH CABINET 1 OUTLET WITH METER

TECHNICAL DATA		
SKU	250724	
MATERIAL	Steel	
METER	1 (260061)	
OUTLET	1 (250019)	
WEIGHT	100 lbs	



Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications





250724


OIL DISPENSER BAR WITH CABINET 2 OUTLET WITH METER

TECHNICAL DATA		
SKU	250725	
MATERIAL	Steel	
METER	2 (260061)	
OUTLET	2 (250019)	
WEIGHT	103 lbs	



Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- Service shops
- · Industrial applications






250725

OIL DISPENSER BAR WITH CABINET **3 OUTLET WITH METER**

TECHNICAL DATA	
250726	
Steel	
3 (260061)	
3 (250019)	
106 lbs	
	250726 Steel 3 (260061) 3 (250019)



- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Industrial applications





250726





235225

500 GAL DOUBLE WALL TANK CONTROL HANDLE

TECHN	ICAL DATA
SKU	235225
TANK CAPACITY	500 GAL
PUMP	250107 - Air Op. Pump 5:1 - 7.4 GPM
HOSE REEL	253802 - 50 ft 1/2" Hose
CONNECTION HOSE	241403 - 3 ft 1/2" Hose
NOZZLE	250250 - Digital Oil Control Handle
AIR FILTER AND REGULATOR	450350 - Air Filter Reg. and Lubricator
LEVEL GAUGE	Krueger Level Gauge
BREATHER	Yes
EMERGENCY VENT	2x Emergency Vents 4"
FILL CAP	2" Lockable Fill Cap Flip Top

^{*} Available with desiccant breather.

Typical Applications

- Service shops
- Heavy-duty dealerships

- Fleet service facilities
 - cilities Fast lube centers
- Farm/Agriculture



235210

300 GAL DOUBLE WALL TANK CONTROL HANDLE

TECHNICAL DATA				
SKU	235210			
TANK CAPACITY	300 GAL			
PUMP	251904 - Air Op. Pump 5:1 - 7.4 GPM			
HOSE REEL	253802 - 50 ft 1/2" Hose			
CONNECTION HOSE	241403 - 3 ft 1/2" Hose			
NOZZLE	250250 - Digital Oil Control Handle			
AIR FILTER AND REGULATOR	450350 - Air Filter Reg. and Lubricator			
LEVEL GAUGE	Krueger Level Gauge			
BREATHER	Yes			
EMERGENCY VENT	2x Emergency Vents 4"			
FILL CAP	2" Lockable Fill Cap Flip Top			

^{*} Available with desiccant breather.

- Automotive dealerships
- Service shops
- · Heavy-duty dealerships


- Fleet service facilities
- Fast lube centers
- Farm/Agriculture

^{*} Available with different accessories, different sizes and configuration upon request.

^{*} Available with different accessories, different sizes and configuration upon request.

OLFLUZE

WOLFLUBE <u>CO</u> TANK 130 GAL CAPACITY FULLY EQUIPPED

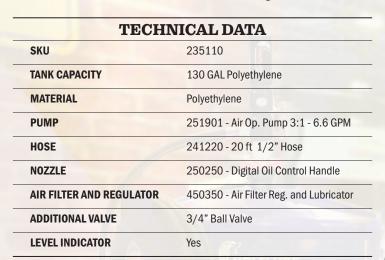

Typical Applications

- · Automotive dealerships
- · Service shops
- · Heavy-duty dealerships
- Fleet service facilities · Fast lube centers · Farm/Agriculture



235110

* Available with different accessories, different pumps and configuration upon request.

27.0"

WOLFLUBE <u>CO</u> TANK 130 GAL CAPACITY

TECHNICAL DATA			
SKU	235100		
TANK CAPACITY	130 GAL Polyethylene		
MATERIAL	Polyethylene		
PUMP THREAD	2" BSP(f)		
HOSE SUPPORT	Yes		
NOZZLE SUPPORT	Yes		
ADDITIONAL VALVE	3/4" Ball Valve		
LEVEL INDICATOR	Yes		

- · Automotive dealerships
- · Service shops
- · Heavy-duty dealerships
- · Fleet service facilities · Fast lube centers • Farm/Agriculture

PROFESSIONAL BULK OIL STORAGE AND TRANSFERING SYSTEM

Professional bulk and transfer Oil system, operating on a "recirculate (kidney loop)" basis through an absolute filter ß1000/5µ with saturation level indicator. Installed between the tank and the filter, the professional model includes a digital flow meter to control the cycles of oil filtering (66 GAL each Cycle). This model also includes a faucet to take samples for analysis. Each tank has its own completely independent and dedicated system, composed by faucet, samples system, pump, meter, hose, and filter to prevent cross-contamination. The system functions with gear pumps at 3.5 GPM flow rate, max 170 PSI, 120V, 3-minute bypass valve, with ON/OFF button including LED indicator and IP55 protection. To be used with lubricants with a viscosity up to 2000 cSt (104° Fahrenheit). The system reservoirs vent through hygroscopic air filters with silica gel, with a particulate filter of 2 p and activated carbon filter for retention up to 123 odors. Containment basin with capacity for all system reservoirs.



257014







Typical Applications

Industrial applications

• Lube Rooms

258014

TECHNICAL DATA							
SKU	257014	257016	258014	258016			
SYSTEM TYPE	Professional	Professional	Professional	Professional			
TANK QTY.	4	6	4	6			
TANK CAPACITY	66 GAL	66 GAL	66 GAL	66 GAL			
TANK MATERIAL	POLYETHYLENE	POLYETHYLENE	ALUMINUM	ALUMINUM			
TANK DIMENSIONS	Ø25.2	Ø25.2	22" x 21.7" x 35.4"	22" x 21.7" x 35.4"			
PUMP	4 Pumps - 120V/60Hz	6 Pumps - 120V/60Hz	4 Pumps - 120V/60Hz	6 Pumps - 120V/60Hz			
FLOW RATE	3.7 GPM	3.7 GPM	3.7 GPM	3.7 GPM			
PUMP POWER WATT	1200	1200	1200	1200			
MAX. VISCOSITY	2000 cSt	2000 cSt	2000 cSt	2000 cSt			
BYPASS VALVE	YES	YES	YES	YES			
FILTER	4 Filters ß1000/5µ	6 Filters β1000/5μ	4 Filters ß1000/5µ	6 Filters β1000/5μ			
METER	4 Digital Meters	6 Digital Meters	4 Digital Meters	6 Digital Meters			
DIMENSIONS	104" x 63" x 62"	104" x102" x 62"	91" x 56" x 62"	103" x 87" x 54"			
DESICCANT BREATHER	4 Breathers	6 Breathers	4 Breathers	6 Breathers			
WEIGHT	1,213 lbs	1,819 lbs	1,213 lbs	1,477 lbs			

STANDARD BULK **OIL STORAGE AND** TRANSFERING SYSTEM

Each tank has its own completely independent and dedicated system, composed by faucet, samples system, pump, meter, hose, and filter to prevent cross contamination. The system functions with gear pumps at 3.5 GPM flow rate, max 170 PSI, 120V, 3-minute bypass valve, with ON/OFF button including LED indicator and IP55 protection. To be used with lubricants with a viscosity up to 2000 cSt (104° Fahrenheit). The system reservoirs vent through hygroscopic air filters with silica gel, with particulate filter of 2 p and activated carbon filter for retention up to 123 odors. Containment basin with capacity for all system reservoirs.

Typical Applications

- Industrial applications
- · Lube Rooms





257004

257006






258004

TECHNICAL DATA						
SKU	257004	257006	258004	258006		
SYSTEM TYPE	Standard	Standard	Standard	Standard		
TANK QTY.	4	6	4	6		
TANK CAPACITY	66 GAL	66 GAL	66 GAL	66 GAL		
TANK MATERIAL	POLYETHYLENE	POLYETHYLENE	ALUMINUM	ALUMINUM		
TANK DIMENSIONS	Ø25.2	Ø25.2	22" x 21.7" x 35.4"	22" x 21.7" x 35.4"		
PUMP	4 Pumps - 120V/60Hz	6 Pumps - 120V/60Hz	4 Pumps - 120V/60Hz	6 Pumps - 120V/60Hz		
FLOW RATE	3.7 GPM	3.7 GPM	3.7 GPM	3.7 GPM		
PUMP POWER WATT	1200	1200	1200	1200		
MAX. VISCOSITY	2000 cSt	2000 cSt	2000 cSt	2000 cSt		
BYPASS VALVE	YES	YES	YES	YES		
FILTER	4 Filters 30µ	6 Filters 30µ	4 Filters 30µ	6 Filters 30µ		
METER	No	No	No	No		
DIMENSIONS	104" x 63" x 62"	104" x102" x 62"	91" x 56" x 62"	103" x 87" x 54"		
DESICCANT BREATHER	4 Breathers	6 Breathers	4 Breathers	6 Breathers		
WEIGHT	1,210 lbs	1,814 lbs	1,210 lbs	1,472 lbs		

AIR OP. OIL FILTERING UNIT WITH HOSE REEL

TECHNICAL DATA	
SKU	254101
PUMP	251903 - Air Operated Pump 5:1 - 7.4 GPN
PRIMARY FILTER	Microglass, 1,000 x 10μ
SECONDARY FILTER	Microglass, 1,000 x 5µ
MAX. WORKING PRESSURE	116 PSI
DOWNTUBE	5ft
CONTROL HANDLE	200301 - 3/4" Inlet/Outlet
HOSE REEL	251009 - 3/4" - 50ft
FOR DRUMS (DRUM SIZE)	55 Gal Drum
FILTERING SYSTEM	Particulate
WEIGHT	575 lbs

254101








Typical Applications

Industrial applications

• Lube Rooms



SUITABLE FOR:



ELECTRIC OIL FILTERING UNIT WITH HOSE REEL

TECHNICAL DATA	
SKU	254201
PUMP	Electric 110V / 60Hz
PRIMARY FILTER	Microglass, 1,000 x 10µ
SECONDARY FILTER	Microglass, 1,000 x 5µ
MAX. WORKING PRESSURE	145 PSI
DOWNTUBE	5ft
CONTROL HANDLE	200301 - 3/4" Inlet/Outlet
HOSE REEL	251009 - 3/4" - 50ft
FOR DRUMS (DRUM SIZE)	55 Gal Drum
FILTERING SYSTEM	Particulate
WEIGHT	595 lbs

• Lube Rooms

Typical Applications

Industrial applications

OLFLUSE


AIR OP. OIL FILTERING UNIT SINGLE FILTERING

TECHNICAL DATA	
SKU	252101
PUMP	251903 - Air Operated Pump 5:1 - 7.4 GPM
PRIMARY FILTER	Microglass, 1,000 x 5µ
SECONDARY FILTER	N/A
SUCTION HOSE	10 ft with spout
RETURNING HOSE	10 ft with spout
MAX. VISCOSITY	ISO 220
FLUID TEMPERATURE	14° F to 176° F
AMBIENT TEMPERATURE	-4° F to 122° F
FILTERING SYSTEM	Particulate
WEIGHT	100 lbs



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Oil transfer
- Industrial applications
- Lube Rooms






AIR OP. OIL FILTERING UNIT DOUBLE FILTERING

TECH	HNICAL DATA
SKU	252102
PUMP	251903 - Air Operated Pump 5:1 - 7.4 GPM
PRIMARY FILTER	Microglass, 1,000 x 5µ
SECONDARY FILTER	N/A
SUCTION HOSE	10 ft with spout
RETURNING HOSE	10 ft with spout
MAX. VISCOSITY	ISO 220
FLUID TEMPERATURE	14° F to 176° F
AMBIENT TEMPERATURE	-4° F to 122° F
FILTERING SYSTEM	Particulate
WEIGHT	115 lbs



Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Oil transfer
- Industrial applications
- Lube Rooms





252102



, Volflure



Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- · Oil transfer
- Industrial applications
- Lube Rooms



ELECTRIC OIL FILTERING UNIT - SINGLE FILTERING

CHNICAL DATA
252201
Electric 110V / 60 Hz - 7.4 GPM
Microglass, 1,000 x 5µ
N/A
10 ft with spout
10 ft with spout
ISO 320
14°F to 176°F
-4° F to 122° F
Particulate
163 lbs







Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Oil transfer
- Industrial applications
- Lube Rooms



ELECTRIC OIL FILTERING UNIT - DOUBLE FILTERING

TECHNICAL DATA	
SKU	252202
PUMP	Electric 110V / 60 Hz - 7.4 GPM
PRIMARY FILTER	Microglass, 1,000 x 5μ
SECONDARY FILTER	N/A
SUCTION HOSE	10 ft with spout
RETURNING HOSE	10 ft with spout
MAX. VISCOSITY	ISO 320
FLUID TEMPERATURE	14° F to 176° F
AMBIENT TEMPERATURE	-4° F to 122° F
FILTERING SYSTEM	Particulate
WEIGHT	168 lbs

3 WHEELS TROLLEY WITH HYDRAULIC LIFTER

TECHNICAL DATA		
SKU	250042	
MATERIAL	Steel	
WHEELS	3 Wheels (1 with swivel)	
FOR DRUMS (DRUM SIZE)	55 Gal Drum	
DISTANCE BETWEEN WHEELS	27"	
LIFT CA <mark>PACITY</mark>	Up to 550 lbs	
WEIGHT	93 lbs	

Typical Applications

- · Service shops
- Farm/Agriculture



TROLLEY WITH 2 PNEUMATIC WHEELS

TECHNICAL DATA	
SKU 250040	
Steel	
2 Pneumatic Wheels	
55 Gal Drum	
64 lbs	



Typical Applications Automotive dealerships


- · Heavy-duty dealerships
- Fast lube centers
- · Fleet service facilities
- · Service shops
- Farm/Agriculture

4 WHEELS **DRUM CRADLE**

TECHNICAL DATA		
SKU	203401	
MATERIAL	Steel	
WHEELS	4 Wheels	
FOR DRUMS (DRUM SIZE)	55 Gal Drum	
LIFT CAPACITY	Up to 600 lbs	
WEIGHT	45 lbs	

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- · Service shops
- Farm/Agriculture





WOLFLUBE EQUIPMENT ACOMPOND OF DEAD OF DEATH ACOMPONDED THE THE

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



3 WHEELS TROLLEY WITH REMOVABLE HANDLE

TECHNICAL DATA	
SKU	250043
MATERIAL	Steel
WHEELS	3 Wheels (1 with swivel)
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	23.4"
WEIGHT CAPACITY	Up to 550 lbs
WEIGHT	36 lbs



- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Fleet service facilities
- · Service shops
- Farm/Agriculture
- Industrial application




3 WHEELS TROLLEY

TECHNICAL DATA	
250039	
Steel	
3 Wheels (1 with swivel)	
55 Gal Drum	
23.4"	
Up to 600 lbs	
50 lbs	

Typical App<mark>lications</mark>

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- · Industrial application



3 WHEELS TROLLEY

TECHNICAL DATA	
SKU	203501
MATERIAL	Steel
WHEELS	2 Wheels
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	26"
WEIGHT CAPACITY	Up to 1,200 lbs
WEIGHT	35 lbs



250039



4 WHEELS TROLLEY FOR 55 GAL DRUMS

TECHNICAL DATA	
SKU	250067
MATERIAL	Steel
WHEELS	4 Wheels (2 with swivel)
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	28.5"
WEIGHT CAPACITY	Up to 600 lbs
WEIGHT	83 lbs

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities



250067

4 WHEELS TROLLEY FOR 55 GAL DRUMS

TECHNICAL DATA	
SKU	250066
MATERIAL	Steel
WHEELS	4 Wheels (2 with swivel)
FOR DRUMS (DRUM SIZE)	55 Gal Drum
DISTANCE BETWEEN WHEELS	28.5"
WEIGHT CAPACITY	Up to 600 lbs
WEIGHT	83 lbs

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- Service shops
- Farm/Agriculture
- · Industrial application





250066

4 WHEELS TROLLEY FOR 16 GAL DRUM

TECHNICAL DATA	
SKU	260030
MATERIAL	Steel
WHEELS	4 Wheels (2 with swivel)
FOR DRUMS (DRUM SIZE)	16 Gal Drum
DISTANCE BETWEEN WHEELS	18.5"
WEIGHT CAPACITY	Up to 600 lbs
WEIGHT	83 lbs

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- · Service shops
- Farm/Agriculture
- Industrial application









Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



TROLLEY WITH 2 PNEUMATIC WHEELS

TECHNICAL DATA	
SKU	250038
MATERIAL	Steel
WHEELS	2 Pneumatic Wheels
FOR DRUMS (DRUM SIZE)	16 Gal Drum
FOR DRUMS WITHIN	14.5" to 16.5"
WEIGHT	17 lbs

250038



Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops
- Farm/Agriculture
- Industrial application




TROLLEY WITH 2 PNEUMATIC WHEELS

2 WHEELS TROLLEY


	THEOMETER WILLES		
TECH	TECHNICAL DATA		
SKU	250037		
MATERIAL	Steel		
WHEELS	2 Pneumatic Wheels		
FOR DRUMS (DRUM SIZE)	16 Gal Drum		
FOR DRUMS WITHIN	10.3" to 13.8"		
WEIGHT	15 lbs		

250037





- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application



TECHNICAL DATA SKU 250036 MATERIAL Steel WHEELS 2 Pneumatic Wheels FOR DRUMS (DRUM SIZE) 5 Gal Drum FOR DRUMS WITHIN 10.2" to 16.5" WEIGHT 13 lbs

250036

ACCESSORIES

DRUM DOLLY

TECHNICAL DATA	
SKU	203301
MATERIAL	Steel
WHEELS	4 Wheels
FOR DR <mark>ums (Drum Size)</mark>	55 Gal Drum
DIAMETER	23.4"
WEIGHT CAPACITY	Up to 1200 lbs
WEIGHT	25 lbs

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application

SUITABLE FOR:





203301

DRUM DOLLY

TECHNICAL DATA		
SKU	203302	
MATERIAL	Steel	
WHEELS	4 Wheels	
FOR DRUMS (DRUM SIZE)	16 Gal Drum	
DIAMETER	14.2"	
WEIGHT CAPACITY	Up to 200 lbs	
WEIGHT	11 lbs	

Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application

SUITABLE FOR:





203302

DRUM DOLLY

TECHNICAL DATA		
SKU	203303	
MATERIAL	Steel	
WHEELS	4 Wheels	
FOR DRUMS (DRUM SIZE)	5 Gal Drum	
DIAMETER	11"	
WEIGHT CAPACITY	Up to 200 lbs	
WEIGHT	8 lbs	

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Farm/Agriculture
- Industrial application

SUITABLE FOR:





230050 230040 230030

WALL BRACKET KIT FOR 1" DIAPHRAGM PUMP

TECHNICAL DATA	
SKU	230050
BRACKET	260003 - Wall Bracket
SUCTION HOSE	243505 - 5 ft - 1" NPT(m) x NPT(m)
DISCHARGE HOSE	243510 - 10 ft - 1" NPT(m) x NPT(m)
QUICK CONNECTION	2x Sets ((2x) 259713 and (2x) 259714)
WEIGHT	28 lbs

WALL BRACKET KIT FOR 3/4" DIAPHRAGM PUMP

TECHNICAL DATA	
SKU	230040
BRACKET	260003 - Wall Bracket
SUCTION HOSE	242505 - 5 ft - 3/4" NPT(m) x NPT(m)
DISCHARGE HOSE	242510 - 10 ft - 3/4" NPT(m) x NPT(m)
QUICK CONNECTION	2x Sets ((2x) 259711 and (2x) 259712)
WEIGHT	23 lbs

WALL BRACKET KIT FOR 1/2" DIAPHRAGM PUMP

TECHNICAL DATA	
SKU	230030
BRACKET	260003 - Wall Bracket
SUCTION HOSE	241205 - 5 ft - 1/2" NPT(m) x NPT(m)
DISCHARGE HOSE	241210 - 10 ft - 1/2" NPT(m) x NPT(m)
QUICK CONNECTION	2x Sets ((2x) 259709 and (2x) 259710)
WEIGHT	19 lbs

WALL BRACKET FOR DIAPHRAGM PUMP

TECHNICAL DATA	
SKU	260003
MATERIAL	Steel
DIMENSIONS	10.5" x 13.0" x 7.0"
WEIGHT	9 lbs

4 WAY VALVE

TECHNIC	CAL DATA
SKU	250530
MATERIAL	Aluminum
SEAL	NBR
MAX. WORKING PRESSURE	200 PSI
THREADS SIZES	1" NPT(f)
WEIGHT	23 lbs


Our four-way valve composed with a handle that swings was developed to simplify the suction/discharge process, making it easier to pull and push (transfer) oils, new or used, from one recipient to another. It makes it possible, with only one single pump to operate both procedures suction and dispensing in the same installation.

The images below illustrate both steps, the suction and dispensing process. Using our four-way valve in a mobile or fixed installation can help drain the oil from the first recipient by switching the handle dispenses into the second one.






250530

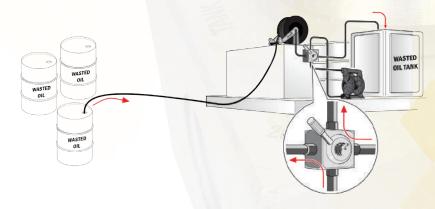

Usually installed in a mobile trolley or lube truck, the four-way valve drains the wasted oil from the drums which later will be dispensed into a waste oil tank.

After collecting the wasted oil, it is time to transfer it to the wasted oil tank. Everything could be done using the same pump and installation.

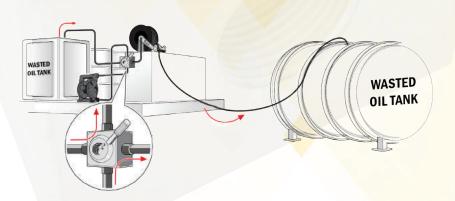





250011

WALL BRACKET FOR **INDUSTRIAL PUMPS**

TECH	INICAL DATA
SKU	250011
MATERIAL	Steel
ANTI-VIBRATION SYSTEM	Yes
WEIGHT	18 lbs





WALL BRACKET FOR **STUB PUMPS**

	MECHALICAL DAMA	
	TECHNICAL DATA	
SKU	204601	
MATERIAL	Steel	
THREAD SIZE	2" BSP(f)	
WEIGHT	2 lbs	



	TECHNICAL DATA
SKU	204701
MATERIAL	Steel
DIMENSIONS	15.8" x 4.8"
WEIGHT	2 lbs



WALL BRACKET/SUPPORT FOR PROBES

	TECHNICAL DATA	
SKU	250030	
MATERIAL	Aluminum	
WEIGHT	2 lbs	



olfluse

TOTE/WALL PICKING UP DROP BRACKET

TECHNICAL DATA	
250006	
Steel	
Yes	
11 lbs	
	250006 Steel Yes

Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- · Oil transfer
- · Fast lube centers

- Service shops
- Farm/Agriculture
- · Fleet service facilities
- · Heavy-duty dealerships
- Mining



TOTE BRACKET FOR PICKING UP DROP (250006)

	TECHNICAL DATA	
SKU	250014	
MATERIAL	Steel	
WEIGHT	2 lbs	



TOTE BRACKET FOR HOSE REEL AND PUMP

	TECHNICAL DATA	
SKU	250013	
MATERIAL	Steel	
THREAD SIZE	2" BSP(f)	
WEIGHT	25 lbs	

Typical Applications

- Automotive dealerships
- Lube trucks
- Industrial application
- Oil transfer
- Fast lube centers
- Service shops
- Farm/Agriculture
- · Fleet service facilities
- Heavy-duty dealerships
- Mining









150009





150010





150011





WALL BRACKET FOR HOSE REELS

TECHNICAL DATA	
SKU	150009
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	2 Reels
CAPACITY - F550 MODEL	2 Reels
CAPACITY - F555 MODEL	(Not applicable to F555 model)
DIMENSIONS	23.3" x 15.4" x 2.6"
WEIGHT	20 lbs

WALL BRACKET FOR HOSE REELS

TECHNICAL DATA	
SKU	150010
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	3 Reels
CAPACITY - F550 MODEL	3 Reels
CAPACITY - F555 MODEL	(Not applicable to F555 model)
DIMENSIONS	34.0" x 15.4" x 2.6"
WEIGHT	27 lbs

WALL BRACKET FOR HOSE REELS


TECHN	TECHNICAL DATA	
SKU	150011	
MATERIAL	Steel	
CAPACITY - F400/F460 MODEL	4 Reels	
CAPACITY - F550 MODEL	4 Reels	
CAPACITY - F555 MODEL	(Not applicable to F555 model)	
DIMENSIONS	43.8" x 15.4" x 2.6"	
WEIGHT	34 lbs	


WALL BRACKET FOR HOSE REELS

TECHNICAL DATA	
SKU	150012
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	(Not applicable to this model)
CAPACITY - F550 MODEL	(Not applicable to this model)
CAPACITY - F555 MODEL	(Not applicable to this model)
CAPACITY - CF500 MODEL	1 Reels
WEIGHT	5 lbs

SWIVELLING WALL BRACKET FOR HOSE REELS

TECHNICAL DATA	
150013	
Steel	
1 Reel	
(Not applicable to this model)	
(Not applicable to this model)	
7.7" x 5.9"	
3 lbs	





10.1" 8.9"

150013

SWIVELLING WALL BRACKET FOR HOSE REELS


TECHNICAL DATA	
SKU	150014
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	(Not applicable to this model)
CAPACITY - F550 MODEL	1 Reel
CAPACITY - F555 MODEL	(Not applicable to this model)
DIMENSIONS	10.1" x 7.9"
WEIGHT	4 lbs




150014

SWIVELLING WALL BRACKET FOR HOSE REELS

TECHNICAL DATA		
SKU	150015	
MATERIAL	Steel	
CAPACITY - F400/F460 MODEL	(Not applicable to this model)	
CAPACITY - F550 MODEL	(Not applicable to this model)	
CAPACITY - F555 MODEL	1 Reel	
DIMENSIONS	10.1" x 9.9"	
WEIGHT	4 lbs	





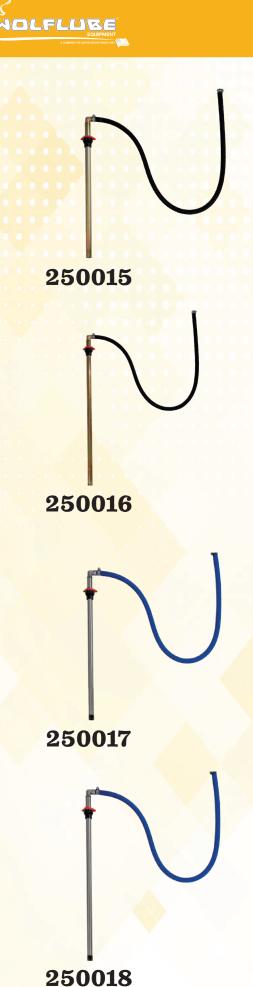

SUCTION TUBE SET FOR DRUMS

TECHNICAL DATA		
KU	250015	
MATERIAL	Steel	
OOWN TUBE	37" Long with Check Valve	
10SE	6 ft	
BUNG ADAPTOR	Yes - 2" Thread	
WEIGHT	14 lbs	

SUCTION TUBE SET FOR TOTES

TECHNICAL DATA		
SKU	250016	
MATERIAL	Steel	
DOWN TUBE	49" Long with Check Valve	
HOSE	6 ft	
BUNG ADAPTOR	Yes - 2" Thread	
WEIGHT	15 lbs	

STAINLESS STEEL SUCTION TUBE SET FOR DRUMS

TE	CHNICAL DATA
SKU	250017
MATERIAL	Stainless Steel
DOWN TUBE	37" Long with Check Valve
HOSE	6 ft
BUNG ADAPTOR	Yes - 2" Thread
WEIGHT	14 lbs

STAINLESS STEEL SUCTION TUBE SET FOR TOTES

	TECHNICAL DATA
SKU	250018
MATERIAL	Stainless Steel
DOWN TUBE	49" Long with Check Valve
HOSE	6 ft
BUNG ADAPTOR	Yes - 2" Thread
WEIGHT	15 lbs

safer to identify the right oil/container.

Wolflube's new oil containers are the ideal solution to safely transfer and storage oil. Some of the main features are robustly made with impact-proof, thick, durable plastic and ergonomically designed for making the transfer and storage easier and safer than regular plastic containers. Available in 3 different container sizes and a range of different lid colors, making it easier and

OIL CONTAINER FOR TRANSFER AND STORAGE

	TECHNICAL DATA	
SKU	257103	
MATERIAL	Plastic	
CAPACITY	0.8 GAL	
WEIGHT	2 lbs	



OIL CONTAINER FOR TRANSFER AND STORAGE

	TECHNICAL DATA	
SKU	257105	
MATERIAL	Plastic	
CAPACITY	1.3 GAL	
WEIGHT	3 lbs	



OIL CONTAINER FOR TRANSFER AND STORAGE

TECHNICAL DATA		
SKU	257110	
MATERIAL	Plastic	
CAPACITY	2.6 GAL	
WEIGHT	4 lbs	







1/2" SPOUT LID

TECHNICAL DATA		
SKU	257121	
MATERIAL	Plastic	
SPOUT LENGHT	7.5" Long	
SPOUT SIZE	1/2"	
COLOR	Black	

1/2" SPOUT LID

TECHNICAL DATA
I E CHINICAL DAIA
257122
Plastic
7.5" Long
1/2"
Yellow

1/2" SPOUT LID

T	TECHNICAL DATA
SKU	257123
MATERIAL	Plastic
SPOUT LENGHT	7.5" Long
SPOUT SIZE	1/2"
COLOR	Red

257123

257122

1/2" SPOUT LID

TECHNICAL DATA	
SKU	257124
MATERIAL	Plastic
SPOUT LENGHT	7.5" Long
SPOUT SIZE	1/2"
COLOR	Blue



1/2" SPOUT LID

TH	ECHNICAL DATA
SKU	257125
MATERIAL	Plastic
SPOUT LENGHT	7.5" Long
SPOUT SIZE	1/2"
COLOR	Green



1" SPOUT LID

T	ECHNICAL DATA
SKU	257131
MATERIAL	Plastic
SPOUT LENGHT	4.5" Long
SPOUT SIZE	1"
COLOR	Black



257131

1" SPOUT LID

ECHNICAL DATA
257132
Plastic
4.5" Long
1"
Yellow



257132

1" SPOUT LID

	TECHNICAL DATA	
SKU	257133	
MATERIAL	Plastic	
SPOUT LENGHT	4.5" Long	
SPOUT SIZE	1"	
COLOR	Red	



1" SPOUT LID

TH	ECHNICAL DATA
SKU	257134
MATERIAL	Plastic
SPOUT LENGHT	4.5" Long
SPOUT SIZE	1"
COLOR	Blue



1" SPOUT LID

T	TECHNICAL DATA	
SKU	257135	
MATERIAL	Plastic	
SPOUT LENGHT	4.5" Long	
SPOUT SIZE	1"	
COLOR	Green	







5 QT PLASTIC CONTAINER

· · · · · · · · · · · · · · · · ·	FECHNICAL DATA
SKU	203908
MATERIAL	Plastic
CAPACITY	5 Quarts
LID TYPE	Clip Lid



3 QT PLASTIC CONTAINER

	TECHNICAL DATA
SKU	203907
MATERIAL	Plastic
CAPACITY	3 Quarts
LID TYPE	Clip Lid

203907



2 QT PLASTIC CONTAINER

1 1 1 1 1 1	TECHNICAL DATA	
SKU	203906	
MATERIAL	Plastic	
CAPACITY	2 Quarts	
LID TYPE	Clip Lid	

203906



1 QT PLASTIC CONTAINER

TECHNICAL DATA	
SKU	203905
MATERIAL	Plastic
CAPACITY	1 Quarts
LID TYPE	Clip Lid

203905



203910

10 QT PLASTIC CONTAINER

TECHNICAL DATA		
SKU	203910	
MATERIAL	Plastic	
CAPACITY	10 Quarts (2.5 GAL)	
LID TYPE	Threaded Lid	

6 QT PLASTIC CONTAINER

TECHNICAL DATA	
SKU	203909
MATERIAL	Plastic
CAPACITY	6 Quarts (1.6 GAL)
LID TYPE	Threaded Lid



203909

5 QT PLASTIC CONTAINER

TECHNICAL DATA		
SKU	203904	
MATERIAL	Plastic	
CAPACITY	5 Quarts	
LID TYPE	Threaded Lid	
	-	



3 QT PLASTIC CONTAINER

	TECHNICAL DATA	
SKU	203903	
MATERIAL	Plastic	
CAPACITY	3 Quarts	
LID TYPE	Threaded Lid	



2 QT PLASTIC CONTAINER

TECHNICAL DATA	
SKU	203902
MATERIAL	Plastic
CAPACITY	2 Quarts
LID TYPE	Threaded Lid



1 QT PLASTIC CONTAINER

TECHNICAL DATA		
SKU	203901	
MATERIAL	Plastic	
CAPACITY	1 Quarts	
LID TYPE	Threaded Lid	







4 QT PLASTIC FUNNEL

TECHNICAL DATA	
SKU	204009
MATERIAL	Plastic
CAPACITY	4 Quarts
FILTER	Wire Mesh Screen

204009



204003



204002



3 QT PLASTIC FUNNEL WITH BUNG ADAPTOR

TECHNICAL DATA		
SKU	204003	
MATERIAL	Plastic	
CAPACITY	3 Quarts	
FILTER	Wire Mesh Screen	

^{*} Bung adapter will keep the funnel safely connected to the drum avoiding spill and accidents.

3 QT PLASTIC FUNNEL

TECHNICAL DATA	
SKU	204002
MATERIAL	Plastic
CAPACITY	3 Quarts
FILTER	Wire Mesh Screen

1.7 QT PLASTIC FUNNEL

TECHNICAL DATA		
SKU	204001	
MATERIAL	Plastic	
CAPACITY	1.7 Quarts	
FILTER	Wire Mesh Screen	

OIL CAN - RIGID SPOUT 6 OZ CAPACITY

TECHNICAL DATA		
SKU	200401	
MATERIAL	Steel	
CAPACITY	6 Oz	
SPOUT	5" Rigid	



200401

OIL CAN - FLEXIBLE SPOUT 6 OZ CAPACITY

TECHNICAL DATA		
SKU	200402	
MATERIAL	Steel	
CAPACITY	6 Oz	
SPOUT	6" Flexible	



200402

OIL CAN - RIGID SPOUT 16 OZ CAPACITY

7	TECHNICAL DATA	
SKU	200501	
MATERIAL	Steel	
CAPACITY	16 Oz	
SPOUT	6" Rigid	



OIL CAN - FLEXIBLE SPOUT 16 OZ CAPACITY

TECHNICAL DATA	
SKU	200502
MATERIAL	Steel
CAPACITY	16 Oz
SPOUT	7" Flexible







250731

90° CONNECTION FOR DISPENSE BAR METERS

TECHNICAL DATA	
SKU	250731
INLET / OUTLET	1/2" Male
MATERIAL	Steel

GOOSENECK SPIGOT

TECHNICAL DATA	
SKU	200301
INLET	1/2" BSP(f)
MATERIAL	Steel



250019

STRAIGHT SPIGOT

4 4 4 4 4 4 6 4	TECHNICAL DATA
SKU	250019
INLET	1/2" BSP(m)
MATERIAL	Steel



204101

DRIP PAN

	TECHNICAL DATA	
SKU	204101	
THREADS	2" BSP(m) / 2" BSP(f)	
MATERIAL	Aluminum	



204102

DRIP PAN

	TECHNICAL DATA	
SKU	204102	
MATERIAL	Steel	

DRUM FAUCET

7	FECHNICAL DATA	
SKU	204301	
INLET	3/4" Male	
MATERIAL	Polyethylene	



204301

DRUM FAUCET

TECHNICAL DATA	
SKU	204401
INLET	3/4" NPT(m)
MATERIAL	Steel



204401

DRUM WRENCH

	TECHNICAL DATA	
SKU	204201	
MATERIAL	Aluminum	



204201

STEEL FOOT VALVE

	TECHNICAL DATA
SKU	200801
OUTLET	3/4" NPT(f)
MATERIAL	Steel

^{*} Recommended for custom down tubes and suction hoses.



TELESCOPIC DOWN TUBE

TECHNICAL DATA	
SKU	200010
THREAD	3/4" BSP(m)
LENGTH	18" to 34.5" long
SEAL	Nitrile
MATERIAL	Steel Galvanized





, Volfluze

201000

BUNG ADAPTOR

TECHNICAL DATA		
SKU	201000	
FOR DOWN TUBES Ø	1"	
THREAD	2" BSP(m)	
MATERIAL	Steel	

BUNG ADAPTOR

TECHNICAL DATA		
SKU	203400	
FOR DOWN TUBES Ø	3/4"	
THREAD	2" BSP(m)	
MATERIAL	Steel	

BUNG ADAPTOR FOR

TECHNICAL DATA		
SKU	250007	
FOR DOWN TUBES Ø	1.18"	
MATERIAL	Aluminum / Plastic (red part)	

AIR OPERATED PUMPS

BUNG ADAPTOR FOR AIR OPERATED PUMPS

TECHNICAL DATA		
SKU	250008	
FOR DOWN TUBES Ø	1.65"	
MATERIAL	Aluminum / Plastic (red part)	

BUNG ADAPTOR FOR AIR OPERATED PUMPS

TECHNICAL DATA		
SKU 250009		
FOR DOWN TUBES Ø	1.97"	
MATERIAL	Aluminum / Plastic (red part)	



203400



250007









251803 - Connects the down tube to the pump.

Down tubes - Available in four different sizes, these

tube extensions allow you

to transform your stub pump in a drum or tote pump. It also helps you building custom down tubes for different size

tanks.

DOWN TUBE CONNECTOR TUBE TO PUMP

TECHNICAL DATA		
SKU	251803	
THREAD	1.1/4" BSP(m)	
THREAD	1" NPT(m)	
MATERIAL	Steel	



251803

DOWN TUBE CONNECTOR FOR TUBE EXTENSION

TECHNICAL DATA	
SKU	251804
THREAD	1.1/4" BSP(m)
MATERIAL	Steel



251804

CHECK/FOOT VALVE FOR AIR OP. DOWN TUBE

TECHNICAL DATA	
SKU	251801
THREAD	1.1/4" BSP(m)
MATERIAL	Steel



251801



251804 - This connector will connect two tube parts helping you to get the exactly length needed.



251840 251830 251820 251810



251801 - One of the most important parts of the down tube, the foot/check valve will keep the down tube always full of oil, making the job easier for the pump.

TECHNICAL DATA				
SKU	251840	251830	<mark>2518</mark> 20	251810
THREADS	1.1/4" BSP(f)	1.1/4" BSP(f)	1.1/4" BSP(f)	1.1/4" BSP(f)
LENGTH	47.7"	35.9"	19.7"	9.9"
MATERIAL	Steel	Steel	Steel	Steel



OLFLUZE











HOSE STOP-1/4" HOSE

TECHNICAL DATA		
SKU	260121	
FOR HOSES Ø	1/4"	
MATERIAL	Rubber	

HOSE STOP - 5/16" HOSE

TECHNICAL DATA		
SKU	260121	
FOR HOSES Ø	5/16"	
MATERIAL	Rubber	

HOSE STOP - 3/8" HOSE

TECHNICAL DATA		
SKU	260121	
FOR HOSES Ø	3/8"	
MATERIAL	Rubber	

HOSE STOP - 1/2" HOSE

TECHNICAL DATA		
SKU	260124	
FOR HOSES Ø	1/2"	
MATERIAL	Rubber	

HOSE STOP - 3/4" HOSE

TECHNICAL DATA		
SKU	260125	
FOR HOSES Ø	3/4"	
MATERIAL	Rubber	

HOSE STOP-1" HOSE

TECHNICAL DATA	
SKU	260126
FOR HOSES Ø	1"
MATERIAL	Rubber

IBC TOTE ADAPTER

247024
247034
2" Coarse Thread Female
3/4"
Polyethylene



IBC TOTE ADAPTER

TECHNICAL DATA	
SKU	247100
INLET	2" Coarse Thread Female
FOR HOSE Ø	1"
MATERIAL	Polyethylene



IBC TOTE ADAPTER

TECHNICAL DATA	
SKU	24711 <mark>4</mark>
INLET	2" Coarse Thread Female
FOR HOSE Ø	1.1/4"
MATERIAL	Polyethylene



IBC TOTE ADAPTER

TECHNICAL DATA	
SKU	247112
INLET	2" Coarse Thread Female
FOR HOSE Ø	1.1/2"
MATERIAL	Polyethylene



IBC TOTE ADAPTER

TECHNICAL DATA	
SKU	247200
INLET	2" Coarse Thread Female
FOR HOSE Ø	2"
MATERIAL	Polyethylene







OLFLUZE

259709





		J	
III III	٨	I	1

SKU

INLET

MATERIAL

QUICK CONNECTOR - 1/2" MALE



259710

T T T T T T T T	TECHNICAL DATA
SKU	259710
INLET	1/2" NPT(f)
MATERIAL	Galvanized Steel

QUICK CONNECTOR - 1/2" FEMALE

TECHNICAL DATA

259709

1/2" NPT(f)

Galvanized Steel



259711



QUICK CONNECTOR - 3/4" FEMALE



TECHNICAL DATA	
SKU	259711
INLET	3/4" NPT(f)
MATERIAL	Galvanized Steel



259712



QUICK CONNECTOR - 3/4" MALE



TECHNICAL DATA		
SKU	259712	
INLET	3/4" NPT(f)	
MATERIAL	MATERIAL Galvanized Steel	



259713



QUICK CONNECTOR - 1" FEMALE



TECHNICAL DATA	
SKU	259713
INLET	1" NPT(f)
MATERIAL	Galvanized Steel



259714



QUICK CONNECTOR - 1" MALE



TECHNICAL DATA		
SKU	259714	
INLET	1" NPT(f)	
MATERIAL	Galvanized Steel	

PLIMP

XIIX

HOSE REELS

HUSES

METERS

SKU	MATERIAL	INLET	OUTLET
150017	Galvanized Steel	1/2" NPT(f)	3/8" NPT(m)
150018	Galvanized Steel	1/2" NPT(f)	1/2" NPT(m)
2 <mark>47343</mark>	Galvanized Steel	3/4" NPT(f)	1/2" NPT(m)
247344	Galvanized Steel	3/4" NPT(f)	3/4" NPT(m)
2 <mark>47345</mark>	Galvanized Steel	3/4" NPT(f)	1" NPT(m)



SKU	MATERIAL	INLET	OUTLET
150021	Stainless Steel	3/8" NPT(m)	3/8" NPT(m)
150022	Stainless Steel	3/8" NPT(m)	1/2" NPT(m)
150023	Stainless Steel	1/2" NPT(m)	1/2" NPT(m)



SKU	MATERIAL	INLET	OUTLET
150032	Plated Steel	3/8" NPT(m)	3/8" NPT(m)
150033	Plated Steel	1/2" NPT(m)	1/4" NPT(m)
150914	Plated Steel	1/4" NPT(m)	1/4" NPT(m)
150915	Plated Steel	3/8" NPT(m)	1/4" NPT(m)



SKU	MATERIAL	INLET	OUTLET
150024	Plated Steel	3/4" NPT(m)	1/2" NPT(m)
150025	Plated Steel	3/4" NPT(m)	3/4" NPT(m)
150026	Plated Steel	1" NPT(m)	3/4" NPT(m)
150027	Plated Steel	1" NPT(m)	1" NPT(m)





OLFLUZE

250035



250034




250033



252920




252910



250029



HOSE REEL SWIVEL - 1"

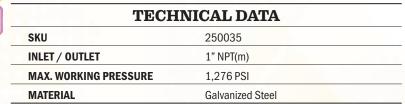




HOSE REEL SWIVEL - 3/4"

TECHNICAL DATA		
SKU 250034		
INLET	3/4" NPT(m)	
MAX. WORKING PRESSURE	1,523 PSI	
MATERIAL	Galvanized Steel	



HOSE REEL SWIVEL - 1/2"

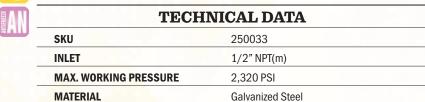

=0

REPLACEMENT ELEMENT - 10µ

TECHNICAL DATA	
SKU	252920
FLOW RATE	Up to 34.3 GPM
MAX. WORKING PRESSURE	560 PSI
FILTER ELEMENT	10 μ Absolute

=0

REPLACEMENT ELEMENT - 5µ

TECHNICAL DATA	
SKU	252910
FLOW RATE	Up to 34.3 GPM
MAX. WORKING PRESSURE	560 PSI
FILTER ELEMENT	5 μ Absolute

PROBE SET - 10 PCS


TECHNICAL DATA		
SKU 250029		
QUANTITY	10 Pieces Set	




A COMPANY OF LUPUS GROUP SINCE 1963



PROFESSIONAL LUBRICATION AND FUELING EQUIPMENT

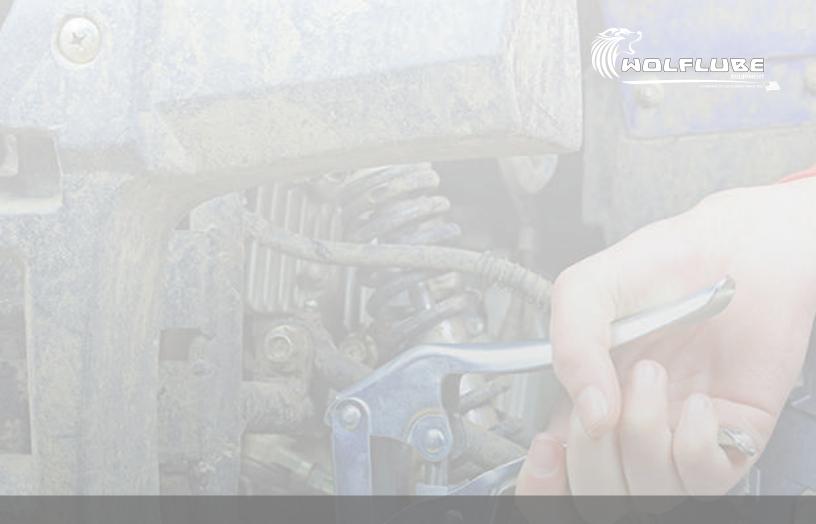

GREASE

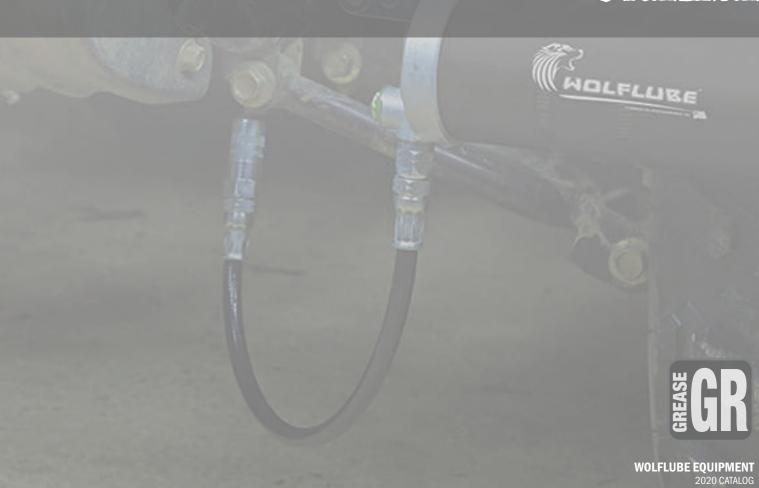



AIR OPERATED PUMPS

- PAGE 4 REGULAR 60:1 AND 70:1
- PAGE 9 INDUSTRIAL PUMPS



- PAGE 15 FRAME LIFTER
- PAGE 17 400 LBS KITS
- PAGE 21 120 LBS KITS
- PAGE 23 35 LBS KITS

MANUAL PUMPS

- PAGE 25 120 LBS PUMPS
- PAGE 28 35 LBS PUMPS

HOSE REELS

- PAGE 33 HOSE REELS UP TO 50 FT
- PAGE 34 HOSE REELS UP TO 100 FT
- PAGE 35 HOSE REELS ENCLOSED REELS

HOSES

• PAGE 37 - HOSES FOR REELS AND CONNECTION HOSES

GREASE NOZZLES AND GUNS

- PAGE 38 GREASE GUNS
- PAGE 40 GREASE NOZZLES / GREASE CONTROL HANDLE

GREASE ACCESSORIES

- PAGE 42 CABINETS AND BRACKETS FOR HOSE REELS
- PAGE 46 LIDS AND FOLLOWER PLATES
- PAGE 48 SWIVELS AND GREASE CONTROL HANDLE PROTECTION
- PAGE 50 FITTINGS















PUMP

KITS

MANUAL PUMPS

AIR OPERATED GREASE PUMPS

The new patented air-operated grease pumps are fully designed and manufactured by WOLFLUBE, which shows remarkable operating features. It is fully assembled with electronic machine tools and the parts have been carefully tested to assure reliability and a long life of the products. The choice of materials and manufacturing quality make this pump suitable to work in the worst environmental conditions.

- Brand new fully air operated motion reverse device, without cams and springs.
- Reduced number of moving parts.
- Large quantity of grease supplied at low air consumption.
- High operating pressure.
- Aluminum alloy bodied pump with electrolytic treatment that ensures very high corrosion strength.

GREASE





AIR OPERATED GREASE PUMP **FOR 35 LBS DRUM - 60:1** FREE FLOW RATE 3.5 LBS/MIN






Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture





SUITABLE FOR:






TECHNICAL DATA		
SKU	152806	
PUMP RATIO	60:1	
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI	
AIR CONSUMPTION (87 PSI)	3.5 CFM	
AIR INLET	1/4" NPT(f)	
FLUID OUTLET	1/4" NPT(m)	
FREE FLOW RATE (87 PSI)	3.5 Lbs / min	
NOISE	76 dB	
SEAL	Polyurethane	
SHANK DIAMETER	1.18"	
SHANK LENGTH	13"	
FOR DRUMS (DRUM SIZE)	35 lbs Drum	
WEIGHT	11 lbs	



The pumps are suitable in supplying high-pressure grease of all types, at a short and long distance. The operating pressure of the grease pumps may vary between a minimum of 37 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

AIR OPERATED GREASE PUMP FOR 45 to 60 LBS DRUM - 60:1 FREE FLOW RATE 3.5 LBS/MIN

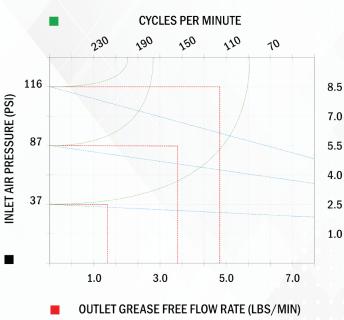

(GREASE NLGI 2 - 68° F)


TECHNICAL DATA						
SKU	152801					
PUMP RATIO	60:1					
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI					
AIR CONSUMPTION (87 PSI)	3.5 CFM					
AIR INLET	1/4" NPT(f)					
FLUID OUTLET	1/4" NPT(m)					
FREE FLOW RATE (87 PSI)	3.5 Lbs / min					
NOISE	76 dB					
SEAL	Polyurethane					
SHANK DIAMETER	1.18"					
SHANK LENGTH	19"					
FOR DRUMS (DRUM SIZE)	45 to 65 lbs Drum					
WEIGHT	12 lbs					


Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops
- · Lube trucks

AIR CONSUMPTION (CFM)

· Farm/Agriculture





SUITABLE FOR:





The pumps are suitable in supplying high-pressure grease of all types, at a short and long distance. The operating pressure of the grease pumps may vary between a minimum of 37 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.



AIR OPERATED GREASE PUMP **FOR 120 LBS DRUM - 60:1** FREE FLOW RATE 3.5 LBS/MIN






Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- · Farm/Agriculture





SUITABLE FOR:





TECHNICAL DATA					
SKU	152805				
PUMP RATIO	60:1				
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI				
AIR CONSUMPTION (87 PSI)	3.5 CFM				
AIR INLET	1/4" NPT(f)				
FLUID OUTLET	1/4" NPT(m)				
FREE FLOW RATE (87 PSI)	3.5 Lbs / min				
NOISE	76 dB				
SEAL	Polyurethane				
SHANK DIAMETER	1.18"				
SHANK LENGTH	29.5"				
FOR DRUMS (DRUM SIZE)	120 lbs Drum				
WEIGHT	14 lbs				




The pumps are suitable in supplying high-pressure grease of all types, at a short and long distance. The operating pressure of the grease pumps may vary between a minimum of 37 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.





AIR OPERATED GREASE PUMP **FOR 400 LBS DRUM - 60:1** FREE FLOW RATE 3.5 LBS/MIN

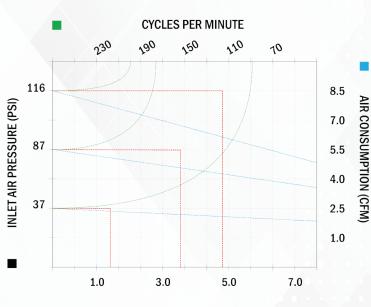

OUTLET GREASE FREE FLOW RATE (LBS/MIN) (GREASE NLGI 2 - 68° F)

TECHNICAL DATA						
SKU	152802					
PUMP RATIO	60:1					
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI					
AIR CONSUMPTION (87 PSI)	3.5 CFM					
AIR INLET	1/4" NPT(f)					
FLUID OUTLET	1/4" NPT(m)					
FREE FLOW RATE (87 PSI)	3.5 Lbs / min					
NOISE	76 dB					
SEAL	Polyurethane					
SHANK DIAMETER	1.18"					
SHANK LENGTH	37.4"					
FOR DRUMS (DRUM SIZE)	400 lbs Drum					
WEIGHT	16 lbs					

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Fleet service facilities
- · Service shops
- · Lube trucks
- · Farm/Agriculture



SUITABLE FOR:





The pumps are suitable in supplying high-pressure grease of all types, at a short and long distance. The operating pressure of the grease pumps may vary between a minimum of 37 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.




AIR OPERATED GREASE PUMP **FOR 400 LBS DRUM - 70:1** FREE FLOW RATE 2.4 LBS/MIN






Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture

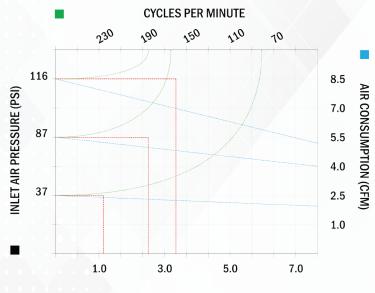

OUTLET GREASE FREE FLOW RATE (LBS/MIN) (GREASE NLGI 2 - 68° F)



SUITABLE FOR:





TECHNICAL DATA						
SKU	152803					
PUMP RATIO	70:1					
AIR WORKING PRESSURE (RANGE)	37 PSI to 116 PSI					
AIR CONSUMPTION (87 PSI)	4.0 CFM					
AIR INLET	1/4" NPT(f)					
FLUID OUTLET	1/4" NPT(m)					
FREE FLOW RATE (87 PSI)	2.4 Lbs / min					
NOISE	76 dB					
SEAL	Polyurethane					
SHANK DIAMETER	1.18"					
SHANK LENGTH	37.4"					
FOR DRUMS (DRUM SIZE)	400 lbs Drum					
WEIGHT	16 lbs					




The pumps are suitable for the central supply of plants where a major measure of grease and major use of pressure at a long and short distance is required. The operating pressure of the grease pumps may vary between a minimum of 37 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.






IND. AIR OPERATED GREASE PUMP FOR 400 LBS DRUM - 50:1 FREE FLOW RATE 9.9 LBS/MIN

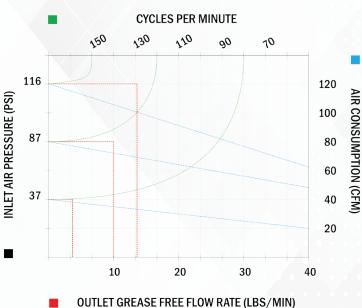

(GREASE NLGI 2 - 68° F)

Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Fleet service facilities
- Service shops
- · Lube trucks
- · Farm/Agriculture
- · Grease transfer
- · Industrial application
- Mining



TECHNICAL DATA SKU 152804

PUMP RATIO

SHANK LENGTH

WEIGHT

FOR DRUMS (DRUM SIZE)

AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI
AIR CONSUMPTION (87 PSI)	46.4 CFM
AIR INLET	1/2" NPT(f)
FLUID OUTLET	1/2" NPT(m)
FREE FLOW RATE (87 PSI)	9.9 Lbs / min
NOISE	80 dB
SEAL	Polyurethane
SHANK DIAMETER	1.77"

50:1

SUITABLE FOR:





The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points.

400 lbs Drum

37.0"

47 lbs

The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.




IND. AIR OPERATED GREASE PUMP FOR 400 LBS DRUM - 70:1 FREE FLOW RATE 15.5 LBS/MIN





Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- · Service shops
- Lube trucks
- · Farm/Agriculture
- · Grease transfer
- Industrial application
- Mining



SUITABLE FOR:





	CYCLES PER MINUTE									
			150	130	110	90	10			
(18	116	-AAA						12	:0	A
Œ (P§								10	0	R COI
SSUF	87							8	0	MUSI
INLET AIR PRESSURE (PSI)								6	0	AIR CONSUMPTION (CFM)
LET.	37							4	0	(CFM)
_								2	0	
	+		10		20	3	0	40		

OUTLET GREASE FREE FLOW RATE (LBS/MIN)
(GREASE NLGI 2 – 68° F)
TECHNICAI DATA


TECHNICAL DATA					
SKU	151029				
PUMP RATIO	70:1				
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI				
AIR CONSUMPTION (87 PSI)	86.8 CFM				
AIR INLET	1/2" NPT(f)				
FLUID OUTLET	1/2" NPT(m)				
FREE FLOW RATE (87 PSI)	15.5 Lbs / min				
NOISE	80 dB				
SEAL	Polyurethane				
SHANK DIAMETER	1.97"				
SHANK LENGTH	37.0"				
FOR DRUMS (DRUM SIZE)	400 lbs Drum				
WEIGHT	61 lbs				

151029

The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points. The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

GREASE

IND. AIR OPERATED GREASE PUMP FOR 400 LBS DRUM - 75:1 FREE FLOW RATE 9.9 LBS/MIN

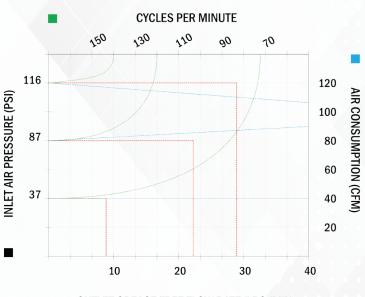


OUTLET GREASE FREE FLOW RATE (LBS/MIN) (GREASE NLGI 2 - 68° F)

TECHNICAL DATA						
SKU	151028					
PUMP RATIO	75:1					
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI					
AIR CONSUMPTION (87 PSI)	86.8 CFM					
AIR INLET	1/2" NPT(f)					
FLUID OUTLET	1/2" NPT(m)					
FREE FLOW RATE (87 PSI)	9.9 Lbs / min					
NOISE	80 dB					
SEAL	Polyurethane					
SHANK DIAMETER	1.77"					
SHANK LENGTH	37.0"					
FOR DRUMS (DRUM SIZE)	400 lbs Drum					
WEIGHT	51 lbs					

Typical Applications

- · Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Fleet service facilities
- Service shops
- Lube trucks
- · Farm/Agriculture
- · Grease transfer
- · Industrial application
- Mining



SUITABLE FOR:





The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points.

The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI.

The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.



HOLFLUBE


IND. AIR OPERATED GREASE PUMP FOR RAM LIFTER - 40:1 FREE FLOW RATE 22.0 LBS/MIN





Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- Service shops
- Lube trucks
- Farm/Agriculture
- Grease transfer
- Industrial application
- Mining



SUITABLE FOR:





			CYCL	ES PER IV	IINUTE			
		150	130	110	90	10		
SI)	116						120) AF
RE (P					\times /		100) 20
SSUF	87	 					80	MUSA
INLET AIR PRESSURE (PSI)							60	AIR CONSUMPTION (CFM)
NET	37	 					40	CFM)
							20	
0 0		10		20	3()	40	


OUTLET GREASE FREE FLOW RATE (LBS/MIN)
(GREASE NLGI 2 - 68° F)

TECHNICAL DATA						
SKU	151019					
PUMP RATIO	40:1					
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI					
AIR CONSUMPTION (87 PSI)	46.4 CFM					
AIR INLET	1/2" NPT(f)					
FLUID OUTLET	1/2" NPT(m)					
FREE FLOW RATE (87 PSI)	22.0 Lbs / min					
NOISE	80 dB					
SEAL	Polyurethane					
SHANK DIAMETER	1.97"					
SHANK LENGTH	23.6"					
FOR DRUMS (DRUM SIZE)	RAM Lifter					
WEIGHT	47 lbs					

151019

The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points. The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

IND. AIR OPERATED GREASE PUMP FOR RAM LIFTER - 50:1 FREE FLOW RATE 9.9 LBS/MIN

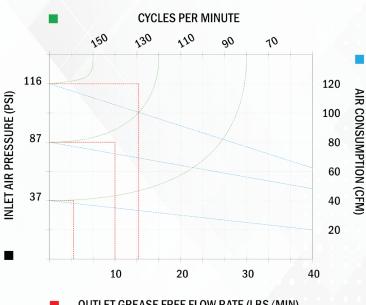

OUTLET GREASE FREE FLOW RATE (LBS/MIN) (GREASE NLGI 2 - 68° F)

TECHNICAL DATA						
SKU	151020					
PUMP RATIO	50:1					
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI					
AIR CONSUMPTION (87 PSI)	46.4 CFM					
AIR INLET	1/2" NPT(f)					
FLUID OUTLET	1/2" NPT(m)					
FREE FLOW RATE (87 PSI)	9.9 Lbs / min					
NOISE	80 dB					
SEAL	Polyurethane					
SHANK DIAMETER	1.77"					
SHANK LENGTH	19.7"					
FOR DRUMS (DRUM SIZE)	RAM Lifter					
WEIGHT	41 lbs					

The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance.

Also, these pumps are ideal for central distribution plants with multiple distribution points.

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Fleet service facilities
- Service shops
- · Lube trucks
- Farm/Agriculture
- · Grease transfer
- · Industrial application
- Mining



SUITABLE FOR:





151020



The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

IND. AIR OPERATED GREASE PUMP FOR RAM LIFTER - 70:1






Typical Applications

FREE FLOW RATE 15.5 LBS/MIN

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Fleet service facilities
- Service shops
- Lube trucks
- · Farm/Agriculture
- · Grease transfer
- Industrial application
- Mining



SUITABLE FOR:





			CYCL	ES PER M	IINUTE			
		150	130	110	90	10		
SI)	116						120	AIR
RE (P					\times /		100	CON
SSUF	87	 		/			80	MNSI
INLET AIR PRESSURE (PSI)							60	AIR CONSUMPTION (CFM)
LET.	37	 					40	CFM)
=							20	
•		10		20	3	0	40	

OUTLET GREASE FREE FLOW RATE (LBS/MIN)
(GREASE NLGI 2 - 68° F)

TECHNICAL DATA						
SKU	151021					
PUMP RATIO	70:1					
AIR WORKING PRESSURE (RANGE)	43 PSI to 116 PSI					
AIR CONSUMPTION (87 PSI)	86.8 CFM					
AIR INLET	1/2" NPT(f)					
FLUID OUTLET	1/2" NPT(m)					
FREE FLOW RATE (87 PSI)	15.5 Lbs / min					
NOISE	80 dB					
SEAL	Polyurethane					
SHANK DIAMETER	1.97"					
SHANK LENGTH	23.6"					
FOR DRUMS (DRUM SIZE)	RAM Lifter					
WEIGHT	51 lbs					

151021

The pumps are suitable for high-pressure transfer of high viscosity grease and fluids at a short and long distance. Also, these pumps are ideal for central distribution plants with multiple distribution points. The operating pressure of the grease pumps may vary between a minimum of 43 PSI to a maximum of 116 PSI. We recommend using filtered and lubricated air to optimize the efficiency and the life of our air operated pumps.

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Mining

- · Industrial application
- · Service shops
- Fleet service facilities
- Grease transfer





GREASE KIT - RAM - FRAME LIFTER AND PRESS 40:1 - FOR 400 LBS DRUM

SKU	150213
PUMP	151019 - Ind. Air Operated Pump 40:1
FREE FLOW RATE (87 PSI)	22 lbs / min
RAM / LIFTER	150203 - Grease Kit - RAM - Frame Lifter
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	510 lbs


GREASE KIT - RAM - FRAME LIFTER AND PRESS 50:1 - FOR 400 LBS DRUM

SKU	150214
PUMP	151020 - Ind. Air Operated Pump 50:1
FREE FLOW RATE (87 PSI)	9.9 lbs / min
RAM / LIFTER	150203 - Grease Kit - RAM - Frame Lifter
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	504 lbs

GREASE KIT - RAM - FRAME LIFTER AND PRESS 70:1 - FOR 400 LBS DRUM

SKU	150215
PUMP	151021 - Ind. Air Operated Pump 70:1
FREE FLOW RATE (87 PSI)	15.5 lbs / min
RAM / LIFTER	150203 - Grease Kit - RAM - Frame Lifter
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	514 lbs

- 1: Outlet feeding pump air
- 2: Off position
- 2a: Lifting position up pump and follower plate
- 2b : Acting position down press-fluid
- 3 : Pressure regulator with manometer for feeding lifter air
- 4 : Cock feeding air lifter follower plate
 5 : Inlet feeding general air into ilter end lubricator













RAM - FRAME LIFTER AND PRESS - WITHOU PUMP FOR 400 LBS DRUM - SHANK ADAPTER Ø 1.18"

150205
1.18"
400 lbs Drum
464 lbs

RAM - FRAME LIFTER AND PRESS - WITHOU PUMP FOR 400 LBS DRUM - SHANK ADAPTER Ø 1.77"

SKU	150206
SHANK ADAPTER Ø	1.77"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	464 lbs

\mathbf{R}	AM - FRAME LIFT	ER AND P	RESS - WITH	IOU PUMP
	FOR 400 LRS DR	IIM - CHAN	IK ADADTER	Ø1 97"

SKU	150207
SHANK ADAPTER Ø	1.97"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	464 lbs

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- · Industrial application
- Mining

- · Farm/Agriculture
- · Service shops
- · Fleet service facilities
- · Grease transfer



SUITABLE FOR:

MAX. HEIGHT	MIN. HEIGHT	MAX. PRESSURE	PUSHING POWER	VISCOSITY
110.3"	70.9"	116 PSI	58 PSI - 992 LBS 87 PSI - 1433 LBS 116 PSI - 1918 LBS	200 to 500 ASTM (77°F)

RAM - FRAME LIFTER AND PRESS - WITHOU PUMP FOR 400 LBS DRUM - SHANK ADAPTER Ø 2"

SKU	150208
SHANK ADAPTER Ø	2"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	464 lbs

Air operated two columns RAM and press for grease and viscous medias.

With its particular 3 ways control valve it lifts or pulls down the pump and the follower plate, improving the exchanging effort of 400 lbs drum. It is particularly advised for the use with high viscosity grease and medias (from 200CPS to 500ASTM). The follower plate is pushed down by the pressurized pneumatic cylinders, avoiding grease flow interruptions by air pockets in the grease bed. More over, it allows to collect all the grease from the inner walls down to the bottom of the drum, pump suction is assisted. Aluminum follower plate with rubber double ring Ø 23.03in for drum 400 lbs.





	150209	150210	150211	150212
SHANK ADAPTER Ø	1.18"	1.77"	1.97"	2"
WEIGHT	55 LBS	55 LBS	55 LBS	55 LBS

Aluminium casted follower plate for grease and viscous medias with rubber double ring Ø 23.03in for drum 400 lbs suitable for air grease pumps. Equipped with ball valve, breather valve and adaptor.

- · Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- · Service shops
- · Fleet service facilities





	7	A		7
1		н	,	J
	1	ы		Т
_ c	1		٨	J

EXECT OF THE PROPERTY OF THE P		

150403

GREASE KIT-WALL MOUNTED 60:1 WITH 30 FT HOSE REEL - FOR 400 LBS DRUM

SKU	150403
PUMP	152802 - 60:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE REEL	153601 - Hose Reel - 1/4" x 30 ft
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum Cover Ø 23.62"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	90 lbs

Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- · Service shops
- · Fleet service facilities





GREASE KIT-WALL MOUNTED 60:1 WITH 50 FT HOSE REEL - FOR 400 LBS DRUM

SKU	150404
PUMP	152802 - 60:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE REEL	150702 - Hose Reel - 1/4" x 50 ft
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum Cover Ø 23.62"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	96 lbs







- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

GREASE KIT - 60:1 - FOR 400 LBS DRUM WITH 3 WHEELS TROLLEY

SKU	150315
PUMP	152802 - 60:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
CONNECTION HOSE	150907 - R2 Hose 5 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum cover Ø 23.62"
TROLLEY	250039 - Three-wheel trolley
FOR DRUMS (DRUM SIZE)	400 lbs Drum
HOSE REEL	153601 - Hose Reel - 30 ft x 1/4"
WEIGHT	126 lbs

150315



100

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Farm/Agriculture
- · Service shops
- · Fleet service facilities

GREASE KIT - 70:1 - FOR 400 LBS DRUM WITH 3 WHEELS TROLLEY

SKU	150319
PUMP	152803 - 70:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	2.4 Lbs / min
CONNECTION HOSE	150907 - R2 Hose 5 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum cover Ø 23.62"
TROLLEY	250039 - Three-wheel trolley
FOR DRUMS (DRUM SIZE)	400 lbs Drum
HOSE REEL	153601 - Hose Reel - 30 ft x 1/4"
WEIGHT	126 lbs

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- · Service shops
- Fleet service facilities



GREASE KIT - 60:1 - FOR 400 LBS DRUM WITH 3 WHEELS TROLLEY

SKU	153501
PUMP	152802 - 60:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150903 - R2 hose 16 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum cover Ø 23.62"
TROLLEY	250039 - Three-wheel trolley
FOR DRUMS (DRUM SIZE)	400 lbs Drum
HOSE REEL	(NOT INCLUDED)
WEIGHT	100 lbs



153501

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities



GREASE KIT - 70:1 - FOR 400 LBS DRUM WITH 3 WHEELS TROLLEY

SKU	150321
PUMP	152803 - 70:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	2.4 Lbs / min
HOSE	150903 - R2 hose 16 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum cover Ø 23.62"
TROLLEY	250039 - Three-wheel trolley
FOR DRUMS (DRUM SIZE)	400 lbs Drum
HOSE REEL	(NOT INCLUDED)
WEIGHT	100 lbs







- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

GREASE KIT - 60:1 - FOR 400 LBS DRUM WITHOUT TROLLEY

SKU	153401
PUMP	152802 - 60:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum Cover Ø 23.62"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	35 lbs

153401






Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- · Fleet service facilities

GREASE KIT - 70:1 - FOR 400 LBS DRUM WITHOUT TROLLEY

SKU	153402
PUMP	152803 - 70:1 for 400 lbs Drum
FREE FLOW RATE (87 PSI)	2.4 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151012 - Follower plate Ø 23.23"
LID / COVER	153803 - Drum Cover Ø 23.62"
FOR DRUMS (DRUM SIZE)	400 lbs Drum
WEIGHT	35 lbs

- · Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- · Service shops
- · Fleet service facilities



GREASE KIT-WALL MOUNTED-60:1 FOR 120 LBS DRUM COMPLETE + 30' HOSE REEL

SKU	150401
PUMP	152805 - 60:1 for 120 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE REEL	153601 - Hose Reel - 1/4" x 30 ft
CONNECTION HOSE	150907 - R2 Hose 5 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151006 - Follower Plate Ø 14.17"
LID / COVER	150505 - Drum Cover Ø 15.55"
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	75 lbs






150401

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Farm/Agriculture
- · Service shops
- Fleet service facilities



GREASE KIT - WALL MOUNTED - 60:1 FOR 120 LBS DRUM COMPLETE + 50' HOSE REEL


SKU	150402
PUMP	152805 - 60:1 for 120 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE REEL	150702 - Hose Reel - 1/4" x 50 ft
CONNECTION HOSE	150907 - R2 Hose 5 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151006 - Follower Plate Ø 14.17"
LID / COVER	150505 - Drum Cover Ø 15.55"
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	81 lbs











- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Farm/Agriculture
- · Service shops
- · Fleet service facilities

GREASE KIT - 60:1 - FOR 120 LBS DRUM WITH 2 WHEELS TROLLEY


SKU	150313
PUMP	152805 - 60:1 for 120 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151006 - Follower Plate Ø 14.17"
LID / COVER	150505 - Drum Cover Ø 15.55"
TROLLEY	250038 - Two-wheel trolley
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	44 lbs



* STANDARD SIZE FOR USA AND CANADA

150313





Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- · Fleet service facilities

GREASE KIT - 60:1 - FOR 120 LBS DRUM WITH 2 WHEELS TROLLEY

SKU	153301
PUMP	152805 - 60:1 for 120 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151009 - Follower plate Ø 15.75"
LID / COVER	150509 - Drum cover Ø 16.54"
TROLLEY	250038 - Two-wheel trolley
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	45 lbs

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- · Service shops
- Fleet service facilities



GREASE KIT - 60:1 - FOR 120 LBS DRUM	
WITHOUT TROLLEY	

SKU	153811
PUMP	152805 - 60:1 for 120 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151006 - Follower Plate Ø 14.17"
LID / COVER	150505 - Drum Cover Ø 15.55"
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	35 lbs



153811

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- · Service shops
- Fleet service facilities



GREASE KIT - 60:1 - FOR 45 TO 60 LBS DRUM WITH 2 WHEELS TROLLEY

SKU	153201
PUMP	152801 - 60:1 for 45 to 60 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151004 - Follower plate Ø 12.20"
LID / COVER	153802 - Drum cover Ø 12.60"
TROLLEY	250037 - Two-wheel trolley
FOR DRUMS (DRUM SIZE)	45 to 60 lbs Drum
WEIGHT	40 lbs







150302



Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Farm/Agriculture
- · Service shops
- Fleet service facilities

GREASE KIT - 60:1 - FOR 45 TO 60 LBS DRUM COMPLETE + HANDLE

SKU	150302
PUMP	152806 - 60:1 for 45 to 60 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151004 - Follower plate Ø 12.20"
LID / COVER	153802 - Drum cover Ø 12.6"
FOR DRUMS (DRUM SIZE)	45 to 60 lbs Drum
WEIGHT	27 lbs



Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- · Service shops
- · Fleet service facilities

GREASE KIT - WHEELED WITH BUCKET 60:1 PUMP - 35 LBS BUCKET CAPACITY

SKU	150301
PUMP	152806 - 60:1 for 35 lbs Drum
FREE FLOW RATE (87 PSI)	3.5 Lbs / min
HOSE	150901 - R2 hose 10 ft x 1/4"
CONTROL HANDLE	100850 - Control Handle Flex. Spout
FOLLOWER PLATE	151001 - Follower plate Ø 8.66"
WEIGHT	40 lbs



WOLFLUBE

MOBILE MANUAL GREASE PUMPS POWERED BY LEVER

Practical and functional; can be used in work environments such as disconnected land meaning agricultural or construction sites. It grants you an easy substitution for the grease container (drum or bucket) and permits quick greasing on all vehicles or mechanisms.

MOBILE MANUAL PUMPS FOR GREASE TRANSFER POWERED BY LEVER

Each cycles of the lever supplies 1.4 Oz of grease. Practical and functional; can be used for the filling of digital unit dispensers, and syringe for the manual greasing. It grants you the easy substitution for the grease container (drum or bucket).

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Farm/Agriculture
- · Service shops
- Fleet service facilities







MANUAL GREASE PUMP		
FOR 120 LBS DRUM PUMP ONLY		

SKU	150150
PUMP TYPE	Lubrication
FREE FLOW RATE (87 PSI)	2.2 oz per 10 cycles
OUTLET	1/4" NPT(m)
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	12 lbs

150150

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- · Service shops
- · Fleet service facilities







MANUAL TRANSFER GREASE PUMP FOR 120 LBS DRUM

SKU	150250
PUMP TYPE	Transfer
FREE FLOW RATE (87 PSI)	14 oz per 10 cycles
OUTLET	1/4" NPT(m)
FOR DRUMS (DRUM SIZE)	120 lbs Drum
WEIGHT	12 lbs



150607











150615







SUITABLE FOR:

GREASE KIT - MANUAL PUMP - FOR 120 LBS DRUM **COMPLETE + 4 WHEELS TROLLEY**

SKU	150607
PUMP	150150 - Manual Pump
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling 7.87 in
TROLLEY	260030 - Four-wheel Trolley
WEIGHT	51 lbs

Typical Applications

- · Automotive dealerships • Farm/Agriculture
- · Fast lube centers Service shops
- · Heavy-duty dealerships · Fleet service facilities

GREASE KIT - MANUAL TRANSFER PUMP - FOR 120 LBS DRUM WITH 90° CONNECTION + 4 WHEELS TROLLEY

SKU	150614
PUMP	150250 - Manual Transfer Pump
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	Without Hose
SPOUT	150002 - 90° Rigid Con. with Adaptor Ø 0.35"
TROLLEY	260030 - Four-wheel Trolley
WEIGHT	49 lbs

Typical Applications

- Automotive dealerships
- Farm/Agriculture
- · Fast lube centers

- · Heavy-duty dealerships
- · Fleet service facilities
- · Service shops

GREASE KIT - MANUAL TRANSFER PUMP - FOR 120 LBS DRUM COMPLETE WITH 30° SPOUT + 4 WHEELS TROLLEY

SKU	150615
PUMP	150250 - Manual Transfer Pump
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	150034 - Hose 1/2" x 6 ft with Valve
QUICK CONNECTOR	150916 (Male) 150917 (Female)
TROLLEY	260030 - Four-wheel Trolley
WEIGHT	51 lbs

- · Automotive dealerships
- Farm/Agriculture
- · Fast lube centers

- · Heavy-duty dealerships
- · Fleet service facilities
- Service shops

2

KITS

GREASE KIT - MANUAL PUMP

FOR 120 LBS DRUM COMPLETE	
SKU	150606
PUMP	150150 - Manual Pump
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling 7.87 in
WEIGHT	51 lbs

Typical Applications

- Automotive dealershipsHeavy-duty dealerships
- Farm/Agriculture
- Fleet service facilities
- · Fast lube centers
- Service shops





GREASE KIT - MANUAL TRANSFER PUMP FOR 120 LBS DRUM WITH 90° CONNECTION

SKU	150610	
PUMP	150250 - Manual Transfer Pump	
FREE FLOW RATE	14 oz per 10 cycles	
LID / COVER	150505 - Drum Cover Ø 15.55"	
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"	
HOSE	Without Hose	
SPOUT	150002 - 90° Rigid Con. with Adaptor Ø 0.35"	
WEIGHT	49 lbs	

Typical Applications

- · Automotive dealerships
- Farm/Agriculture
- Fas
- Heavy-duty dealerships
 Fleet service facilities
- Fast lube centersService shops





GREASE KIT - MANUAL TRANSFER PUMP FOR 120 LBS DRUM COMPLETE WITH 30° SPOUT

SKU	150611
PUMP	150250 - Manual Transfer Pump
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	150505 - Drum Cover Ø 15.55"
FOLLOWER PLATE	151006 - Follower Plate Ø 14.57"
HOSE	150034 - Hose 1/2" x 6 ft with Valve
QUICK CONNECTOR	150916 (Male) 150917 (Female)
WEIGHT	51 lbs

- Automotive dealershipsHeavy-duty dealerships
- Farm/Agriculture
- Fleet service facilities
- Fast lube centers
- Service shops











GREASE KIT - MANUAL PUMP - FOR 45 TO 60 LBS DRUM COMPLETE + 2 WHEELS TROLLEY

SKU	150605
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
TROLLEY	250036 - Two-wheel Trolley
WEIGHT	51 lbs

Typical Applications

- Automotive dealerships
- Farm/Agriculture
- · Fast lube centers

- · Heavy-duty dealerships
- · Fleet service facilities
- Service shops





GREASE KIT - MANUAL PUMP - FOR 45 TO 60 LBS DRUM WITH 90° CONNECTION AND 2 WHEELS TROLLEY

SKU	150612
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150002 - 90° Rigid Con. with Adaptor Ø $0.35^{\prime\prime}$
TROLLEY	250036 - Two-wheel Trolley
WEIGHT	51 lbs

Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers

- · Heavy-duty dealerships
- Fleet service facilities
- Service shops





GREASE KIT - MANUAL TRANSFER PUMP - FOR 45 TO 60 LBS DRUM COMPLETE AND TROLLEY

SKU	150613
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
TROLLEY	250036 - Two-wheel Trolley
WEIGHT	51 lbs

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
 Fleet service facilities

GREASE KIT - MANUAL PUMP

FOR 45 TO 60 LBS DRUM COMPLETE	
SKU	150604
PUMP	150150 - Manual Pump
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
WEIGHT	15 lbs

Typical Applications

- · Automotive dealerships · Heavy-duty dealerships
- · Farm/Agriculture
- · Fleet service facilities
- · Fast lube centers
- · Service shops





GREASE KIT-MANUAL TRANSFER PUMP FOR 45 TO 60 LBS DRUM WITH 90° CONNECTION

SKU	150608	
PUMP	150250 - Manual Transfer Pump	
FREE FLOW RATE	14 oz per 10 cycles	
LID / COVER	153802 - Drum Cover Ø 12.60"	
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"	
HOSE	Without Hose	
SPOUT	150002 - 90° Rigid Con. with Adaptor Ø 0.35"	
WEIGHT	49 lbs	

Typical Applications

- Automotive dealerships
- Farm/Agriculture
- · Fast lube centers
- · Heavy-duty dealerships
- · Fleet service facilities
- · Service shops



SUITABLE FOR:



GREASE KIT - MANUAL TRANSFER PUMP FOR 45 TO 60 LBS DRUM COMPLETE WITH 30° SPOUT

SKU	150609
PUMP	150250 - Manual Transfer Pump
FREE FLOW RATE	14 oz per 10 cycles
LID / COVER	153802 - Drum Cover Ø 12.60"
FOLLOWER PLATE	151004 - Follower Plate Ø 12.20"
HOSE	150034 - Hose 1/2" x 6 ft with Valve
QUICK CONNECTOR	150916 (Male) 150917 (Female)
WEIGHT	51 lbs

Typical Applications

- · Automotive dealerships · Heavy-duty dealerships
- Farm/Agriculture
- · Fleet service facilities
- · Fast lube centers
- · Service shops







MANUAL PUMPS MANUAL PUMPS



150603



150601




Typical Applications

- Automotive dealerships
- Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- · Fleet service facilities

GREASE KIT - MANUAL PUMP FOR 35 LBS DRUM COMPLETE

SKU	150603
FREE FLOW RATE	2.2 oz per 10 cycles
LID / COVER	150502 - Drum Cover Ø 11.02"
FOLLOWER PLATE	151002 - Follower Plate Ø 10.43"
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
WEIGHT	14 lbs




Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- Service shops
- Fleet service facilities

FOOT OPERATED GREASE PUMP WITH 35 LBS CAPACITY BUCKET

SKU	150601
FREE FLOW RATE	2.2 oz per 10 cycles
OUTLET PRESSURE	5,800 PSI
SPOUT	150028 - Rigid with 4-jaw Coupling
HOSE	150003 - R2 hose 6 ft x 1/4"
WHEELS	Yes
WEIGHT	37 lbs

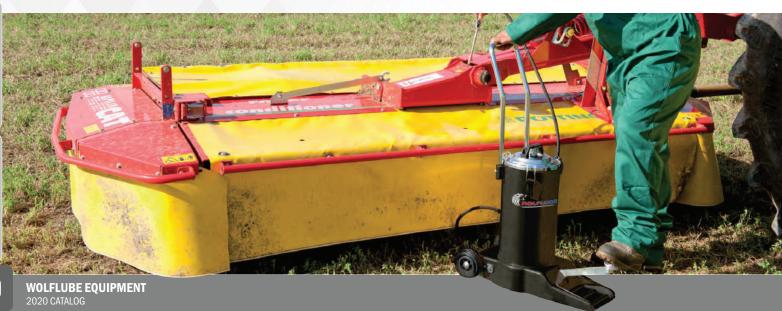

- Automotive dealerships
- · Heavy-duty dealerships
- Fast lube centers
- Farm/Agriculture
- · Service shops
- Fleet service facilities



MANUAL GREASE PUMP - WHEELED AND WITH BUCKET 35 LBS BUCKET CAPACITY

SKU	150602
FREE FLOW RATE	2.2 oz per 10 cycles
HOSE	150003 - R2 hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
OUTLET PRESSURE	5,800 PSI
WHEELS	Yes
WEIGHT	29 lbs



150602

Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fast lube centers
- Farm/Agriculture
- · Service shops
- Fleet service facilities



MANUAL GREASE PUMP - WITH BUCKET 35 LBS BUCKET CAPACITY

SKU	152401
FREE FLOW RATE	2.2 oz per 10 cycles
HOSE	150003 - R2 hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
OUTLET PRESSURE	5,800 PSI
WHEELS	No
WEIGHT	28 lbs







MANUAL GREASE PUMP - WITH BUCKET 15 LBS BUCKET CAPACITY

SKU	102304
FREE FLOW RATE	2.2 oz per 10 cycles
MATERIAL	Steel
BUCKET CAPACITY	15 Lbs
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
TROLLEY	No
WEIGHT	11 lbs

Typical Applications

- Automotive dealerships
- Farm/Agriculture
- · Fast lube centers

- · Heavy-duty dealerships
- Fleet service facilities
- Service shops



MANUAL GREASE PUMP - WITH BUCKET 30 LBS BUCKET CAPACITY

SKU	102305
FREE FLOW RATE	2.2 oz per 10 cycles
MATERIAL	Steel
BUCKET CAPACITY	30 Lbs
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
TROLLEY	No
WEIGHT	14 lbs

Typical Applications

- Automotive dealerships
- Farm/Agriculture
- · Fast lube centers

- · Heavy-duty dealerships
- Fleet service facilities
- · Service shops



102306

MANUAL GREASE PUMP - WITH BUCKET AND TROLLEY 30 LBS BUCKET CAPACITY

SKU	102306
FREE FLOW RATE	2.2 oz per 10 cycles
MATERIAL	Steel
BUCKET CAPACITY	30 Lbs
HOSE	150003 - R2 Hose 6 ft x 1/4"
SPOUT	150028 - Rigid with 4-jaw Coupling
TROLLEY	Yes
WEIGHT	18 lbs
Tunical Annilastians	

- · Automotive dealerships
- Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
 Fleet service facilities
- Service shops





SOME ADVANTAGES OF USING HOSE REELS

- Improves the environment.
- Ensures security by reducing serious accidents. Since the hose is rolled up and stored in the reel component after it is finished being used it could prevent future tripping incidents.
- Prevents leakage and reduces cost. If hoses are kept in good condition and on the reel, it will reduce the wear and tear, extending the life of the hose up to five times.
- Improves efficiency by helping people control hoses as they like, thereby the productivity is increased by allowing quick and easy dispense of fluids.


SELECTING HOSE REELS

The hose reels are categorized by the diameter, length of the hose, working pressure and the type of operation it could be used in. They are usually installed in fixed locations, overhead, walls, trucks or on mobile carts. In order to satisfy the dispense requirements, a reel can be chosen to have a bigger or smaller fluid inlet or outlet. Choosing the proper reel will improve your operation making it safer and more reliable.

SIZES AND CAPACITY


MODEL F400	Up to 30ft 3/8" or Up to 50ft 1/4"
MODEL F460	Up to 50ft 3/8" or Up to 60ft 1/4"
MODEL F550	Up to 80ft 3/8"
MODEL F555	Up to 100ft 3/8"

HOSE REEL INSTALLATIONS

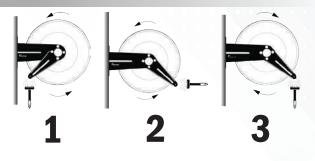

WALL MOUNTED

Available in 3 different set ups, the first set up is reel 1, which is the one with the hose facing to the front of the reel. The two other set ups 1 and 3 have the hose downwards. Set up 3 is the most common since the arms are set to go in the direction towards the right.



BENCH AND LUBE TRUCKS

Bench and lube trucks installations are the same as set ups 1 and 3.



CEILING

Ceiling installations are the same as the wall mounted 2 set up.

OLFLUZE




FEATURES:

- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE: 8700 PSI

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 2SC hose and zinc plated steel fittings

NPT(f) x NPT(m).

:	SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
15	0716	F400	1/4" NPT(m)	1/4" NPT(m)	Without hose	-	35 lbs
15	0717	F400	3/8" NPT(m)	3/8" NPT(m)	Without hose	-	35 lbs
15	3601	F400	1/4" NPT(m)	1/4" NPT(m)	30 ft	1/4"	46 lbs
15	0702	F400	1/4" NPT(m)	1/4" NPT(m)	50 ft	1/4"	56 lbs
15	50703	F400	3/8" NPT(m)	1/4" NPT(m)	30 ft	3/8"	50 lbs
15	1022	F460	1/4" NPT(m)	1/4" NPT(m)	Without hose	-	47 lbs
15	1023	F460	3/8" NPT(m)	3/8" NPT(m)	Without hose	09/4000	47 lbs
15	60704	F460	1/4" NPT(m)	1/4" NPT(m)	60 ft	1/4"	51 lbs
15	3602	F460	3/8" NPT(m)	1/4" NPT(m)	50 ft	3/8"	65 lbs

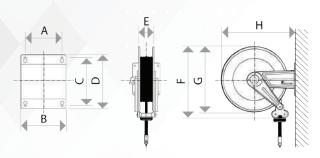


MODEL	Α	В	С	D	E	F	G	Н
F400	6.2"	4.7"	6.6"	7.6"	3.8"	17.7"	15.8"	17.1"
F460	6.2"	4.7"	6.6"	7.6"	3.8"	18.9"	18.1"	19.7"

FEATURES:


- DOUBLE ARMS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE: 8700 PSI

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 2SC hose and zinc plated steel fittings





SKU	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
151024	F550	3/8" NPT(m)	3/8" NPT(m)	Without hose	.	53 lbs
150706	F550	3/8" NPT(m)	1/4" NPT(m)	60 ft	3/8"	94 lbs
150707	F550	3/8" NPT(m)	1/4" NPT(m)	80 ft	3/8"	109 lbs
151025	F555	3/8" NPT(m)	3/8" NPT(m)	Without hose	-	62 lbs
150708	F555	3/8" NPT(m)	1/4" NPT(m)	100 ft	3/8"	132 lbs

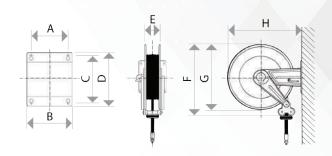

MODEL	Α	В	C	D	E	F	G	Н
F550	7.9"	5.9"	8.9"	10.6"	4.7"	23.3"	21.7"	23.6"
F555	9.9"	7.9"	8.9"	10.6"	6.7"	23.3"	21.7"	23.6"









FEATURES:


- WALL BRACKET ADJUSTABLE IN 3 DIFFERENT POSITIONS
- GALVANIZED SWIVELLING 90° JOINT
- POWDER COATED PAINT
- POLYURETHANE SEALS
- UNIVERSAL HOSE STOP
- MAX. WORKING PRESSURE: 8700 PSI

Hose reels, with hose, are equipped with a black Wolflube synthetic rubber 2SC hose and zinc plated steel fittings NPT(f) x NPT(m).

P	PART#	MODEL	INLET	OUTLET	HOSE LENGTH	HOSE Ø	WEIGHT
1	50712	CF500	1/4" NPT(m)	1/4" NPT(m)	Without hose	-	51 lbs
1	50713	CF500	3/8" NPT(m)	3/8" NPT(m)	Without hose	-	51 lbs
1	50711	CF500	1/4" NPT(m)	1/4" NPT(m)	60 ft	1/4"	87 lbs
1	50709	CF500	1/4" NPT(m)	1/4" NPT(m)	30 ft	1/4"	69 lbs
1	50710	CF500	1/4" NPT(m)	1/4" NPT(m)	50 ft	1/4"	81 lbs
1	50714	CF500	3/8" NPT(m)	3/8" NPT(m)	30 ft	3/8"	74 lbs
1	50715	CF500	3/8" NPT(m)	3/8" NPT(m)	50 ft	3/8"	88 lbs

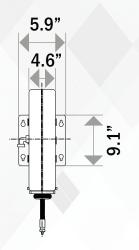

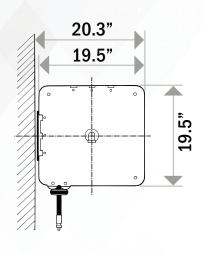



FEATURES:

- SYNTHETIC RUBBER HOSE 2SC/R2.
- ZINC PLATED STEEL FITTINGS
- FEMALE FITTINGS WITH SWIVEL
- SPECIAL SIZE FITTINGS AVAILABLE
 - 1/8" THREAD FOR 1/4" HOSE
 - 1/4" THREAD FOR 3/8" HOSE
 - 3/8" THREAD FOR 1/4" HOSE

Approximately Weight per Foot		
1/4"	3/8"	
+- 3.3 oz	+- 4.9 oz	





SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
150801	1/4"	5,800 PSI	11,600 PSI	30 ft	NPT(m) 1/4" x NPT(f) 1/4"
150821	1/4"	5,800 PSI	11,600 PSI	30 ft	NPT(m) 1/4" x NPT(f) 3/8"
150802	1/4"	5,800 PSI	11,600 PSI	50 ft	NPT(m) 1/4" x NPT(f) 1/4"
150822	1/4"	5,800 PSI	11,600 PSI	50 ft	NPT(m) 1/4" x NPT(f) 3/8"
150803	1/4"	5,800 PSI	11,600 PSI	60 ft	NPT(m) 1/4" x NPT(f) 1/4"
150823	1/4"	5,800 PSI	11,600 PSI	60 ft	NPT(m) 1/4" x NPT(f) 3/8"
150804	3/8"	2,610 PSI	10,440 PSI	30 ft	NPT(m) 3/8" x NPT(f) 3/8"
150805	3/8"	2,610 PSI	10,440 PSI	50 ft	NPT(m) 3/8" x NPT(f) 3/8"
150806	3/8"	2,610 PSI	10,440 PSI	65 ft	NPT(m) 3/8" x NPT(f) 3/8"
150807	3/8"	2,610 PSI	10,440 PSI	80 ft	NPT(m) 3/8" x NPT(f) 3/8"
150808	3/8"	2,610 PSI	10,440 PSI	100 ft	NPT(m) 3/8" x NPT(f) 3/8"

CONNECTION HOSES - MALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
150907	1/4"	5,800 PSI	11,600 PSI	5 ft	NPT(m) 1/4" x NPT(f) 1/4"
150901	1/4"	5,800 PSI	11,600 PSI	10 ft	NPT(m) 1/4" x NPT(f) 1/4"
150903	1/4"	5,800 PSI	11,600 PSI	15 ft	NPT(m) 1/4" x NPT(f) 1/4"
150904	1/4"	5,800 PSI	11,600 PSI	20 ft	NPT(m) 1/4" x NPT(f) 1/4"
150913	3/8"	2,610 PSI	10,440 PSI	5 ft	NPT(m) 3/8" x NPT(f) 3/8"
150909	3/8"	2,610 PSI	10,440 PSI	10 ft	NPT(m) 3/8" x NPT(f) 3/8"
150911	3/8"	2,610 PSI	10,440 PSI	15 ft	NPT(m) 3/8" x NPT(f) 3/8"

CONNECTION HOSES - FEMALE X FEMALE

SKU	SIZE Ø	W.P	B.P	HOSE LENGTH	FITTINGS
150003	1/4"	5,800 PSI	11,600 PSI	6 ft	NPT(f) 1/4" x NPT(f) 1/4"
150925	1/4"	5,800 PSI	11,600 PSI	12 ft	NPT(f) 1/4" x NPT(f) 1/4"
150936	3/8"	2,610 PSI	10,440 PSI	6 ft	NPT(f) 3/8" x NPT(f) 3/8"
150939	3/8"	2,610 PSI	10,440 PSI	12 ft	NPT(f) 3/8" x NPT(f) 3/8"

4" Steel with 4-jaw Coupling



MANUAL GREASE GUN - MINI PISTOL 3,000 PSI W.P - 3 OZ CAPACITY

SKU 101201 **FREE FLOW RATE** 0.6 oz per 40 strokes

MATERIAL Steel and Aluminum die cast head

TUBE CAPACITY 3 oz

WORKING PRESSURE 3,000 PSI

WEIGHT 1 lbs

Typical Applications

SPOUT

- Automotive dealerships · Farm/Agriculture
- Fleet service facilities · Service shops
- · Fast lube centers

MANUAL GREASE GUN - PUSH TYPE 1,000 PSI W.P - 4 OZ CAPACITY

SKU 101301 **FREE FLOW RATE** 1 oz per 32 strokes

MATERIAL Steel **TUBE CAPACITY** 4 oz

WORKING PRESSURE 1,000 PSI

SPOUT 3" Steel with Universal Coupling

WEIGHT 1 lbs

Typical Applications

- · Automotive dealerships
- · Farm/Agriculture
- · Fast lube centers

- · Fleet service facilities
- · Service shops

MANUAL GREASEGUN - LEVER ACTION STANDARD 6,000 PSI W.P - 16 OZ CAPACITY

SKU 101401 **FREE FLOW RATE** 1 oz per 28 strokes MATERIAL Steel **TUBE CAPACITY** 14 oz Cartridge or 16 oz Bulk Fill **WORKING PRESSURE** 6.000 PSI **SPOUT** 6" Steel with 4-jaw Coupling WEIGHT 4 lbs

Typical Applications

- · Automotive dealerships
- · Farm/Agriculture
- · Fast lube centers

- · Heavy-duty dealerships
- · Fleet service facilities
- · Service shops

MANUAL GREASE GUN - PISTOL GRIP 5,000 PSI W.P - 16 OZ CAPACITY

SKU 101601 **FREE FLOW RATE** 0.7 oz per 40 strokes **MATERIAL** Steel and Aluminum die cast head 14 oz Cartridge or 16 oz Bulk Fill **TUBE CAPACITY WORKING PRESSURE** 5,000 PSI **SPOUT** 12" Flexible with 4-jaw Coupling WEIGHT 3 lbs

- · Automotive dealerships
- Farm/Agriculture
- · Fast lube centers

- · Heavy-duty dealerships
- · Fleet service facilities
- Service shops

MANUAL GREASE GUN - LEVER ACTION - HEAVY DUTY 10,000 PSI W.P - 14 OZ CAPACITY

10,0001 81 11	ii ii oz om nom
SKU	101701
FREE FLOW RATE	1 oz per 28 strokes
MATERIAL	Steel and Aluminum die cast head
TUBE CAPACITY	14 oz
WORKING PRESSURE	10,000 PSI
SPOUT	12" Flexible with 4-jaw Coupling
WEIGHT	4 lbs

Typical Applications

- · Automotive dealerships
- Farm/Agriculture
- · Fast lube centers

10,000

- Fleet service facilities · Heavy-duty dealerships
- · Service shops

AIR-OPERATED	GREASE GUN - 40:1
4,800 PSI W.P	- 14 OZ CAPACITY

SKU	101801
FREE FLOW RATE	Up to 14 oz per minute
MATERIAL	Steel and Aluminum die cast head
TUBE CAPACITY	14 oz
WORKING PRESSURE	4,800 PSI
RATIO	40:1
AIR CONSUMPTION	1 CFM
AIR INLET	1/4"
AIR WORK. PRESSURE (RANGE)	40 PSI to 120 PSI
SPOUT	3" Steel with Universal Coupling
WEIGHT	3 lbs

Typical Applications

- · Automotive dealerships
- Farm/Agriculture
- · Fast lube centers
- · Heavy-duty dealerships · Fleet service facilities
- · Service shops

AIR-OPERATED GREASE GUN - HIGH POWER 50:1-6,000 PSI W.P-14 OZ CAPACITY

SKU	101901
FREE FLOW RATE	1 oz per 40 strokes
MATERIAL	Steel and Aluminum die cast head
TUBE CAPACITY	14 oz Cartridge or 16 oz Bulk Fill
WORKING PRESSURE	6,000 PSI
RATIO	50:1
AIR CONSUMPTION	1 CFM
AIR INLET	1/4"
AIR WORK. PRESSURE (RANGE)	40 PSI to 120 PSI
SPOUT	9" Steel with Universal Coupling
WEIGHT	5 lbs

Typical Applications

- · Automotive dealerships
- Farm/Agriculture
- · Fast lube centers
- · Heavy-duty dealerships · Fleet service facilities
- · Service shops



101701


101801











SKU	100801
INLET THREAD	1/4" NPT(f)
MATERIAL	Steel
SWIVEL	360° Z Swivel
MAX. WORKING PRESSURE	7,500 PSI
SPOUT	6" Steel with 4-jaw Coupling
WEIGHT	3 lbs

- · Automotive dealerships · Heavy-duty dealerships
- Farm/Agriculture
- · Fast lube centers · Service shops
- · Fleet service facilities



PROFESSIONAL GREASE CONTROL VALVE - WITH Z SWIVEL 7,500 PSI W.P - FLEXIBLE SPOUT

SKU	100850
INLET THREAD	1/4" NPT(f)
MATERIAL	Steel
SWIVEL	360° Z Swivel
MAX. WORKING PRESSURE	7,500 PSI
SPOUT	12" Flexible with 4-jaw Coupling
WEIGHT	3 lbs

Typical Applications

- · Automotive dealerships
- · Farm/Agriculture
- · Fast lube centers

- · Heavy-duty dealerships
- · Fleet service facilities





PROFESSIONAL GREASE CONTROL VALVE - WITH Z SWIVEL AND HAND PROTECTOR

100899
1/4" NPT(f)
Steel
360° Z Swivel
7,500 PSI
6" Steel and 12" Flexible with 4-jaw Coupling
100005 - Grease Control Valve Protection
3 lbs

Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- · Fleet service facilities

• Farm/Agriculture

· Fast lube centers · Service shops





100850

* BOTH (RIGID AND FLEXIBLE) SPOUT INCLUDED.

NOZZLES AND GUNS



Heavy Duty Grease control valve with a built-in pressure boost mechanism. Provides continuous flow with pistol handle fully pressed and pressure boost achieved through repeated actuation of the pistol handle. Boosts line pressure from 6,000 PSI to 10,000 PSI, extremely useful in unblocking frozen grease fittings.

Heavy Duty steel construction, provides durability & longevity, has an ergonomically designed pistol handle and outfitted with 360° Z Swivel.

PREMIUM GREASE CONTROL VALVE - WITH Z SWIVEL 10,000 PSI W.P - RIGID SPOUT

SKU	100901
INLET THREAD	1/4" NPT(f)
MATERIAL	Steel
SWIVEL	360° Z Swivel
MAX. WORKING PRESSURE	10,000 PSI
SPOUT	6" Steel with 4-jaw Coupling
WEIGHT	3 lbs

Typical Applications

· Automotive dealerships · Heavy-duty dealerships

• Mining

- · Farm/Agriculture
- · Fleet service facilities
- · Fast lube centers
- · Service shops





DIGITAL GREASE NOZZLE - WITH Z SWIVEL 7,250 PSI W.P - RIGID SPOUT

SKU	151026
FREE FLOW RATE	Up to 5.5 lbs/min
MATERIAL	Aluminum and Steel
INLET THREAD	1/4" NPT(f)
MAX. WORKING PRESSURE	7,250 PSI
BURST PRESSURE	14,500 PSI
MEASURING SYSTEM	Oval Gear
MAX. WORKING TEMPERATURE	140° F
DISPLAY	4 Digits
SPOUT	6" Steel with 4-jaw Coupling
BATTERY	Standard AAA
WEIGHT	4 lbs

Typical Applications

· Automotive dealerships · Heavy-duty dealerships

Mining

- Farm/Agriculture
- Fleet service facilities
- · Fast lube centers
- · Service shops


















Introducing our fixed cabinets that offer an independent, cleaner and safer working station in any environment (factories, repair shops, quick lubes etc) allowing a better fluid handling without wastes. The cabinets can be connected to a centralized distribution system, adding extras lube points.

Available in 4 different sizes, the cabinets can hold up to 6 hose reels model F555.

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Mining
- Farm/Agriculture
- Fleet service facilities
- · Fast lube centers
- Service shops









130004

CABINET FOR HOSE REELS SUITABLE FOR UP TO 9 HOSE REEL

SUITABLE FOR UP TO 9 HOSE REELS SKU 150007 150008 130004 130006					
150007	150008	130004	130006		
Steel	Steel	Steel	Steel		
4 Reels	6 Reels	6 Reels	9 Reels		
3 Reels	4 Reels	5 Reels	7 Reels		
2 Reels	3 Reels	4 Reels	6 Reels		
43.9" x 19.7" x 98.5"	61.1" x 19.7" x 98.5"	65.0" x 23.6" x 100.4"	91.0" x 23.6" x 101.0"		
424 lbs	475 lbs	700 lbs	775 lbs		
	150007 Steel 4 Reels 3 Reels 2 Reels 43.9" x 19.7" x 98.5"	150007 150008 Steel Steel 4 Reels 6 Reels 3 Reels 4 Reels 2 Reels 3 Reels 43.9" x 19.7" x 98.5" 61.1" x 19.7" x 98.5"	150007 150008 130004 Steel Steel Steel 4 Reels 6 Reels 6 Reels 3 Reels 4 Reels 5 Reels 2 Reels 3 Reels 4 Reels 43.9" x 19.7" x 98.5" 61.1" x 19.7" x 98.5" 65.0" x 23.6" x 100.4"		


I.	


KITS

FRONT END REEL BRACKET				
SKU	130100	130200		
MATERIAL	Steel	Steel		
REELS CAPACITY - F400 / F460	1 Reel	2 Reels		
REELS CAPACITY - F550	1 Reel	2 Reels		
REELS CAPACITY - F555	(Not applicable)	(Not applicable)		
DIMENSIONS	18" x 14" x 95"	23.3" x 14" x 95"		
WEIGHT	120 lbs	139 lbs		

Typical Applications

- Automotive dealerships
- · Heavy-duty dealerships
- Mining
- Farm/Agriculture
- Fleet service facilities
- Fast lube centers
- Service shops











130100

FRONT END REEL BRACKET				
SKU	130300	130400		
MATERIAL	Steel	Steel		
REELS CAPACITY - F400 / F460	3 Reels	4 Reels		
REELS CAPACITY - F550	3 Reels	4 Reels		
REELS CAPACITY - F555	(Not applicable)	(Not applicable)		
DIMENSIONS	34" x 14" x 95"	43.8" x 14" x 95"		
WEIGHT	146 lbs	155 lbs		

Typical Applications

- · Automotive dealerships
- · Heavy-duty dealerships
- Mining
- Farm/Agriculture
- Fleet service facilities
- Fast lube centers
- Service shops





Fixed supports that offer an independent working station. They allow an optimal placing in every working environment (factories and repair shops) allowing to operate in a clean and safe way and without wasting of lubricant oils for different uses.









150010





150011





150012

WALL BRACKET - FOR HOSE REELS UP TO 2 REELS 150009 Steel

MATERIAL Steel

CAPACITY - F400/F460 MODEL 2 Reels

CAPACITY - F550 MODEL 2 Reels

CAPACITY - F555 MODEL (Not applicable to F555 model)

DIMENSIONS 23.3 x 15.4 x 2.6

WEIGHT 20 lbs

Typical Applications

SKU

- Automotive dealerships
 Farm/A
 - Farm/Agriculture
- Fast lube centers
- Heavy-duty dealerships
 Fleet service factors
- Fleet service facilities Service shops

WALL BRACKET - FOR HOSE REELS UP TO 3 REELS

SKU	150010
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	3 Reels
CAPACITY - F550 MODEL	3 Reels
CAPACITY - F555 MODEL	(Not applicable to F555 model)
DIMENSIONS	34.0 x 15.4 x 2.6
WEIGHT	27 lbs

Typical Applications

- Automotive dealerships
- Farm/Agriculture
- · Fast lube centers

- · Heavy-duty dealerships
- Fleet service facilities
- · Service shops

WALL BRACKET - FOR HOSE REELS UP TO 4 REELS

01 1	
SKU	150011
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	4 Reels
CAPACITY - F550 MODEL	4 Reels
CAPACITY - F555 MODEL	(Not applicable to F555 model)
DIMENSIONS	43.8 x 15.4 x 2.6
WEIGHT	34 lbs

Typical Applications

- Automotive dealerships
- Farm/Agriculture
- Fast lube centers

- · Heavy-duty dealerships
- Fleet service facilities
- Service shops

WALL BRACKET FOR CLOSED HOSE REELS

I OIL CLOSED HOSE RELEAS		
SKU	150012	
MATERIAL	Steel	
CAPACITY - F400/F460 MODEL	(Not applicable to this model)	
CAPACITY - F550 MODEL	(Not applicable to this model)	
CAPACITY - F555 MODEL	(Not applicable to this model)	
CAPACITY - CF500 MODEL	1 Reel	
WEIGHT	5 lbs	

Typical Applications

- · Automotive dealerships
- Farm/Agriculture
- · Fast lube centers


- · Heavy-duty dealerships
- · Fleet service facilities
- · Service shops

SWIVELLING WALL BRACKET FOR HOSE REELS F400 AND F460 MODEL

	7 100 11112 1 100 1110222
SKU	150013
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	1 Reel
CAPACITY - F550 MODEL	(Not applicable to this model)
CAPACITY - F555 MODEL	(Not applicable to this model)
DIMENSIONS	7.7" x 5.9"
WEIGHT	3 lbs

Typical Applications

- · Automotive dealerships · Heavy-duty dealerships
- Farm/Agriculture
- · Fast lube centers · Fleet service facilities
 - · Service shops





150013

SWIVELLING WALL BRACKET FOR HOSE REELS F550 MODEL SKU 150014 **MATERIAL** Steel CAPACITY - F400/F460 MODEL (Not applicable to this model) **CAPACITY - F550 MODEL CAPACITY - F555 MODEL** (Not applicable to this model) **DIMENSIONS** 10.1" x 7.9" **WEIGHT** 4 lbs

Typical Applications

- · Automotive dealerships
- Farm/Agriculture
- · Fast lube centers



150014

10.1" 8.9 · Heavy-duty dealerships · Fleet service facilities · Service shops

SWIVELLING WALL BRACKET FOR HOSE REELS F555 MODEL

1 0101100210	ELLO I GGG MIGDEL
SKU	150015
MATERIAL	Steel
CAPACITY - F400/F460 MODEL	(Not applicable to this model)
CAPACITY - F550 MODEL	(Not applicable to this model)
CAPACITY - F555 MODEL	1 Reel
DIMENSIONS	10.1" x 9.9"
WEIGHT	4 lbs

Typical Applications

- · Automotive dealerships · Heavy-duty dealerships
- Farm/Agriculture
- · Fleet service facilities
- · Fast lube centers · Service shops



150015







- POWDER COATED PAINT
- ADJUSTABLE SIZE
- LID LOCKERS INCLUDED

Suitable for the application of the threaded ring fixing pumps.

The drum lid is available in different diameters from 11 to 400 lbs.

A handle provides an easy grip to the drum. It keeps the pump in vertical position in order to assure perfect working.



LIDS/COVER LOCKER
Also available/sold separately.

150599

	SKU	LID/COVER Ø	DRUM SIZE	MIN. INSIDE Ø	MAX. INSIDE Ø	SHANK Ø	WEIGHT
	150501	8.86"	11 lbs	7.87"	8.86"	1.18"	1.0 lb
	150502	11.02"	26 to 35 lbs	9.45"	11.02"	1.18"	1.2 lbs
*	153802	12.60"	35 to 66 lbs	10.24"	12.60"	1.18"	1.5 lbs
	150504	13.78"	44 to 66 lbs	11.81"	13.78"	1.18"	1.7 lbs
*	150505	15.55"	120 lbs	13.39"	15.55"	1.18"	2.1 lbs
	150509	16.54"	120 to 132 lbs	14.57"	16.54"	1.18"	2.3 lbs
*	153803	23.62"	400 lbs	21.65"	23.62"	1.18"	4.1 lbs
	LIDS / CO	VERS FOR INDUSTRI	AL PUMPS				
*	150506	15.55"	120 lbs	13.39"	15.55"	1.77"	2.2 lbs
	150510	16.54"	120 to 132 lbs	14.57"	16.54"	1.77"	2.1 lbs
*	153801	23.62"	400 lbs	21.65"	23.62"	1.77"	4.1 lbs
*	150507	15.55"	120 lbs	13.39"	15.55"	1.97"	2.2 lbs
	150511	16.54"	120 to 132 lbs	14.57"	16.54"	1.97"	2.1 lbs
*	150515	23.62"	400 lbs	21.65"	23.62"	1.97"	4.0 lbs
*	150508	15.55"	120 lbs	13.39"	15.55"	2"	2.2 lbs
	150512	16.54"	120 to 132 lbs	14.57"	16.54"	2"	2.1 lbs
*	150516	23.62"	400 lbs	21.65"	23.62"	2"	4.0 lbs

^{*}

STANDARD SIZE FOR USA AND CANADA



We recommend to always use the follower plate; it is very important that the ambient temperature is low when high viscosity grease is used. Due to the depression created by the pump, the plate is attracted towards the bottom of the drum by atmospheric pressure. It is pushing the grease into the pump and avoids air cavities. Also, it removes the grease remaining on the walls down to the bottom of the drums.





	SKU	FOLLOWER PLATE Ø	DRUM SIZE	MIN. DRUM Ø	MAX. DRUM Ø	SHANK Ø	WEIGHT
	151001	8.86"	11 lbs	7.68"	8.27"	1.18"	9 oz
	151002	10.43"	26 to 35 lbs	9.45"	10.24"	1.18"	1.2 lbs
	151003	11.42"	35 to 44 lbs	9.84"	11.02"	1.18"	1.4 lbs
*	151004	12.20"	40 to 66 lbs	10.63"	11.81"	1.18"	1.5 lbs
	151005	13.39"	44 to 66 lbs	11.81"	12.99"	1.18"	1.5 lbs
*	151006	14.57"	120 lbs	13.19"	14.17"	1.18"	1.5 lbs
	151009	15.75"	120 to 132 lbs	14.17"	15.75"	1.18"	2.5 lbs
*	151012	23.23"	400 lbs	21.26"	22.84"	1.18"	10 lbs
	FOLLOWER P	LATE FOR INDUS	STRIAL PUMPS				
*	151007	14.57"	120 lbs	13.19"	14.17"	1.77"	2.4 lbs
	151010	15.75"	120 to 132 lbs	14.17"	15.75"	1.77"	2.5 lbs
*	151013	23.23"	400 lbs	21.26"	22.84"	1.77"	9 lbs
*	151008	14.57"	120 lbs	13.19"	14.17"	1.97"	2.5 lbs
	151011	15.75"	120 to 132 lbs	14.17"	15.75"	1.97"	1.7 lbs
*	151014	23.23"	400 lbs	21.26"	22.84"	1.97"	9 lbs

Caution: Above recommendations may not work with all containers of similar capacity. Due to the difference in lube container specifications from one company to another, there can be a difference in your container size.

Above recommendations are based on most widely used container specifications worldwide. Ensure that your lube container falls within the above specified follower plate dimensions.





* 103701	11.34"	35 lbs	9.70"	11.14"	1.18"	8 oz
* 103702	14.96"	120 lbs	12.77"	14.66"	1.18"	1 lb
* 103703	23.70"	400 lbs	21.75"	23.15"	1.18"	3.3 lbs





SWIVEL CONNECTION - Z STYLE SKU 100001 MATERIAL Steel INLET 1/4" NPT(f) OUTLET 1/4" NPT(m) MAX. WORKING PRESSURE 12,000 PSI WEIGHT 9 oz

	3
	12,000 PSI
100001	
Dear State of the	
THE	
	7,500 PSI
400000	0 0 0 0 0

SWIVEL CONNECTION - Z STYLE			
SKU	100002		
MATERIAL	Steel		
INLET	1/4" NPT(f)		
OUTLET	1/4" NPT(m)		
MAX. WORKING PRESSURE	7,500 PSI		
WEIGHT	9 oz		



GREASE CONTROL VALVE PROTECTION		
SKU	100005	
MATERIAL	Steel	
WEIGHT	3 oz	



	EXTENTION PIPE FO	R GREASE CONTROL VALVE
	SKU	101001
	MATERIAL	Steel
٠	INLET	1/8" NPT(m)
	OUTLET	1/8" NPT(m)
	LENGTH	6"
	MAX. WORKING PRESSURE	7,500 PSI
	WEIGHT	2 oz



EXTENTION PIPE FOR GREASE CONTROL VALVE				
SKU	101002			
MATERIAL	Steel			
INLET	1/8" NPT(m)			
OUTLET	1/8" NPT(m)			
LENGTH	18"			
MAX. WORKING PRESSURE	7,500 PSI			
WEIGHT	5 oz			

HOSE EXTENTION I	FOR GREASE NOZZLES/GUNS
SKU	101101
INLET	1/8" NPT(m)
OUTLET	1/8" NPT(m)
WORKING PRESSURE	5,800 PSI
BUSTING PRESSURE	13,775 PSI
LENGTH	12"
WEIGHT	2 oz





HOSE EXTENTION FOR GREASE NOZZLES/GUNS SKU 101102

Sito	101102	
INLET	1/8" NPT(m)	
OUTLET	1/8" NPT(m)	
WORKING PRESSURE	5,800 PSI	
BUSTING PRESSURE	13,775 PSI	
LENGTH	18"	
WEIGHT	3 oz	





HOSE EXTENTION FOR GREASE NOZZLES/GUNS

SKU	101103
INLET	1/8" NPT(m)
OUTLET	1/8" NPT(m)
WORKING PRESSURE	5,800 PSI
BUSTING PRESSURE	13,775 PSI
LENGTH	20"
WEIGHT	3 oz





1	
5,800	1
PSI	_



UNBLOCKER FOR GREASE FITTINGS

SKU	100201	
MATERIAL	Steel	
01 -	Professional Recessed Lube Adaptor	
01 -	Grease Injector Needle	
01 -	Professional 90° Angle Lube Adaptador	
01 -	Professional Narrow Needle Nose Adaptor	
01 - Jaw type Coupler to Seal off Dispenser		
01 - Regular Coupler to Right Coupler		
01 -	Quick Connect Hose	
WEIGHT	4 lbs	



100201

UNBLOCKER FOR	GREASE FITTINGS
10	0501

SKU	100501
MATERIAL	Steel
WEIGHT	1 lb



Opens clogged grease fittings and loosens hardened grease joints. Excellent for maintaining and protecting bearings, control arms, joints, king pins, etc. This tool has an all steel construction and is designed to be tapped with a hammer to force a light viscosity oil through the tool into the coupler & finally into the grease joint, breaking up and removing dirt and debris. Built-In Hand Guard for added safety in use. Flexible hose attachment reaches fittings in difficult areas.















100605



102101

STANDARD HYDRAUI	LIC COUPLER WITH BALL CHECK
SKU	100601
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	3,000 PSI
JAWS	4 Jaws
* Sold in pack with 10 couplers/fitt	ings.

PROFESSIO	IAL HYDRAULIC COUPLER WITH BALL CHECK
CKII	100602

SKU	100602
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	6,000 PSI
JAWS	3 Jaws

^{*} Sold in pack with 10 couplers/fittings.

HEAVY DUTY HYDRAU	LIC COUPLER WITH BALL CHECK
SKU	100603
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	10,000 PSI
JAWS	4 Jaws

^{*} Sold in pack with 10 couplers/fittings.

HEAVY DUTY HYDRAU	LIC COUPLER WITH BALL CHECK
SKU	100604
MATERIAL	Steel
INLET	1/8" NPT(f)
MAX. WORKING PRESSURE	10,000 PSI
JAWS	3 Jaws

^{*} Sold in pack with 10 couplers/fittings.

HYDRAULIC COUPLER - 360° - WITH BALL CHECK			
SKU	100605		
MATERIAL	Steel		
INLET	1/8" NPT(f)		
MAX. WORKING PRESSURE	7,000 PSI		
JAWS	3 Jaws		

BULK LOADER / FILLER NIPPLE FOR GREASE GUNS				
SKU	102101			
MATERIAL	Steel			
INLET	1/8" BSP(m)			
MAX. WORKING PRESSURE	3,000 PSI			

BUTTON HEAD COUPLER				
SKU	100701			
MATERIAL	Steel			
INLET	1/8" NPT(f)			
MAX. WORKING PRESSURE	3,000 PSI			
BUTTON HEAD FITTING	5/8"			



5				

- Control	G	

100703



100401



100402



BUTTON HEAD COUPLER - GIANT		
SKU	100702	
MATERIAL	Steel	
INLET	1/8" NPT(f)	
MAX. WORKING PRESSURE	7,500 PSI	
BUTTON HEAD FITTING	7/8"	

BUTTON HEAD COUPLER - STANDARD		
SKU	100703	
MATERIAL	Steel	
INLET	1/8" NPT(f)	
MAX. WORKING PRESSURE	6,000 PSI	
BUTTON HEAD FITTING	5/8"	

4 IN ONE EASY OUT FITTING - SMALL		
SKU	100401	
MATERIAL	Steel	
OPENS FITTINGS WITH HEX SIZE	5/16" and 3/8"	
RETHREAD SIZE	1/8"	

^{* 4} tools in 1 : Rethread, Screw extrator, Install straight fittings and Install angled fittings.

4 IN ONE EASY OUT FITTING - LARGE		
SKU	100402	
MATERIAL	Steel	
OPENS FITTINGS WITH HEX SIZE	3/8" and 7/16"	
RETHREAD SIZE	1/4"	

^{* 4} tools in 1 : Rethread, Screw extrator, Install straight fittings and Install angled fittings.

GREASE INJECTOR NEEDLE		
SKU	102001	
MATERIAL	Stainless Steel	
LENGTH	1.5"	
MAX. WORKING PRESSURE	1,000 PSI	

Lubricates in very tight spaces such as universal joints and sealed bearings. Equipped with grease fitting for quick connect operation. Complete with protective plastic holder.

HEAVY DUTY GUN HOLDER		
SKU	102201	
MATERIAL	Steel	

Product Brief

Heavy Duty Grease Gun holder, designed specially for use on farm & construction equipment, trailers, tractors & other automobiles in high vibration environments.

Sturdy All Steel construction with a 4 bolt design for easy & secure mounting. Heavy Duty Spring, works with both 14 oz. capacity Grease Guns with a 2-1/4".



* Grease gun not included.



102201

51

KITS

MANUAL PUMPS

HOSE REELS

OSES

DZZLES / GUNS

ege GR

GREASE



150916



	GREASE
091	00

GREASE

150005



150006



150002



151016



150001





* Fitting not included

QUICK CONNECTION COUPLER - MALE		
SKU	150916	
MATERIAL	Steel	
INLET	1/4" NPT(f)	
MAX. WORKING PRESSURE	11,600 PSI	

QUICK CONNECTION COUPLER - FEMALE		
SKU	150917	
MATERIAL	Steel	
INLET	1/4" NPT(f)	
MAX. WORKING PRESSURE	11,600 PSI	

SWIVELLING JOINT FOR HOSE REELS		
SKU	150005	
MATERIAL	Steel	
INLET	1/4" NPT(m)	
OUTLET	1/4" NPT(m)	
MAX. WORKING PRESSURE	8,700 PSI	

SWIVELLING JOINT FOR HOSE REELS		
SKU	150006	
MATERIAL	Steel	
INLET	3/8" NPT(m)	
OUTLET	3/8" NPT(m)	
MAX. WORKING PRESSURE	8.700 PSI	

90° RIGID CONNECTION FOR MANUAL PUMP		
SKU	150002	
MATERIAL	Steel	
INLET	1/4" NPT(m)	

	HANDLE FOR GREASE KITS
SKU	151016
MATERIAL	Steel

SAFETY/BALL VALVE				
SKU	150001			
MATERIAL	Steel			
INLET	1/4" NPT(f)			
OUTLET	1/8" NPT(m)			
MAY WORKING PRESSURE	5 800 PSI			

COLOR CODE FITTING CAP				
SKU	100301	100302	100303	
COLOR	Black	Red	Yellow	
PACKAGE	Sold in pack with 50 caps			
MATERIAL	Plastic			
\triangle_n \bigcirc	Charles and the second			

SAE GREASE FITTINGS KIT - BOX WITH 100 PCS				
SKU	100101			
MATERIAL	Steel			
Thread Spec.	Straight	45°	90°	
1/8"-27 PTF	15	10	10	
1/4"-28 SAE-LT	15	10	10	
Grease Fitting Caps (Red)		10		
Grease Fitting Caps (Yellow)		10		
Grease Fitting Caps (Black)		10		

SAE GREASE FITTINGS KIT - BOX WITH 110 PCS				
SKU	100102			
MATERIAL	Steel			
Thread Spec.	Straight	45°	90°	
1/8"-27 PTF	30	15	15	
1/4"-28 SAE-LT	20	15	15	

METRIC GREASE FITTINGS KIT - BOX WITH 110 PCS				
SKU	100103			
MATERIAL Steel				
Thread Spec.	Straight	90°		
M6 x 1	30	20		
M8 x 1 20 10				
M10 x 1 20 10				

METRIC GREASE	FITTINGS KIT - I	SOX WITH I	UIPCS
SKU	100104		
MATERIAL	Steel		
Thread Spec.	Straight	45°	90°
M6 x 1	30	5	10
M8 x 1	14	-	5
M10 x 1	20	5	10
100401		1	0 0 0
100402		1	0 0 0

SAE GREASE FITTINGS KIT - BOX WITH 80 PCS				
100105				
Steel				
Straight	45°	90°		
25	10	10		
15	10	10		
	100105 Steel Straight 25	100105 Steel Straight 45° 25 10		

SAE GREASE FITTINGS KIT - BOX WITH 101 PCS					
SKU	100106				
MATERIAL	Steel				
Thread Spec.	Straight	35°	45°	65°	90°
1/8"-27 PTF	22	5	10	10	10
1/4"-28 SAE-LT	22	-	10	-	10
100401			1		
100402			1		





















SKU	MATERIAL	INLET	OUTLET
150017	Galvanized Steel	1/2" NPT(f)	3/8" NPT(m)
150018	Galvanized Steel	1/2" NPT(f)	1/2" NPT(m)
247343	Galvanized Steel	3/4" NPT(f)	1/2" NPT(m)
247344	Galvanized Steel	3/4" NPT(f)	3/4" NPT(m)
247345	Galvanized Steel	3/4" NPT(f)	1" NPT(m)
SKU	MATERIAL	INLET	OUTLET
150021	Stainless Steel	3/8" NPT(m)	3/8" NPT(m)
150022	Stainless Steel	3/8" NPT(m)	1/2" NPT(m)
150023	Stainless Steel	1/2" NPT(m)	1/2" NPT(m)
SKU	MATERIAL	INLET	OUTLET
150032	Plated Steel	3/8" NPT(m)	3/8" NPT(m)
150033	Plated Steel	1/2" NPT(m)	1/4" NPT(m)
150914	Plated Steel	1/4" NPT(m)	1/4" NPT(m)
150915	Plated Steel	3/8" NPT(m)	1/4" NPT(m)
SKU	MATERIAL	INLET	OUTLET
150024	Plated Steel	3/4" NPT(m)	1/2" NPT(m)
150025	Plated Steel	3/4" NPT(m)	3/4" NPT(m)
150026	Plated Steel	1" NPT(m)	3/4" NPT(m)
150027	Plated Steel	1" NPT(m)	1" NPT(m)