

A GORMAN-RUPP COMPANY





RELIABLE PUMPS, METERS, AND ACCESSORIES.

We work each day to make great products even better, and introduce new technologies to make fuel transfer easier, faster, and safer. Because of this, our bright red pumps are found on more farms and job sites around the world than any other brand.

Over the past few years we have introduced the industry's first UL listed portable fuel transfer pump for gasoline. We also brought you the industry's first DC, continuous duty fuel transfer pump, and with it, introduced nextec Intelligence®.

While nobody can predict the future, you can trust Fill-Rite to continue to lead the field in design and technology advancements.



TABLE OF CONTENTS

ABOUT US ——————————————————————————————————	1-3
FUEL TRANSFER————————————————————————————————————	
DC PUMPS———————	4 -10
AC PUMPS ————————————————————————————————————	11-15, 24
FMS	16
HAND PUMPS ————————————————————————————————————	17
METERS-	18-21
ACCESSORIES	22-23
CABINET SYSTEMS———————————————————————————————————	24
CHEMICAL TRANSFER ————————————————————————————————————	25-30
DC PUMPS——————	25-27
AC PUMPS ————————————————————————————————————	25,27
METERS-	28-29
HAND PUMPS ————————————————————————————————————	30
ACCESSORIES ————————————————————————————————————	30-31

NEW! NX25-DDC

For Gasoline / Diesel / B20 / E-15 / Kerosene



NX25-DDC Series Continuous Duty

Flow 25 GPM (95 LPM)

1 1/4" inlet | 1" outlet 2" NPT or BSPT tank mount, or foot mount Cast iron pump housing

1/3 HP motor | Rated to -40°F/-40°C Continuous duty for fuel transfer





20' removable power cord | 35A fuse w/heavy duty holder | Elbow

NX25-DDCNB-PX	N	Bung mount, 20' power cable (10/3 awg)
NX25-DDCNB-AA	N	18' hose, ultra hi-flow nozzle, bung mount, 20'power Cable (10/3 awg)
NX25-DDCNF-PX	N	Foot mount, 20' power cable (10/3 awg) (Pictured right)
NX25-DDCNF-AA	N	18' hose, ultra hi-flow nozzle, foot mount, 20' power Cable (10/3 awg)
NX25-DDCBB-PX	В	Bung mount, 20' power cable (10/3 awg)
NX25-DDCBF-PX	В	Foot mount, 20' power cable (10/3 awg)









THE FUTURE OF FUEL TRANSFER IS HERE.

CONTINUOUS, ALL-DAY FUELING

CONTINUOUS DUTY -

Transfer fuel all day

TRUE 25 GPM - High flow fuel transfer rates at the nozzle

INTELLIGENT TONES - Indicate where attention is needed

VARIABLE SPEED MOTOR - Optimize performance and improve suction lift

LIGHTWEIGHT-

Hassle-free installation

AUTO POWER DOWN AFTER
20 MINUTES - Reduce energy costs

MAGNETIC SWITCH - Smooth operation and field replaceable

SLOW DOWN IN BYPASS -

Reduce energy consumption

REMOTE ON/OFF - Ideal for tall, above ground tanks

REDUCED VAPOR LOCK -

Keep running in harsh summer temperatures

nextec Intelligence® is an exclusive array of design advancements, technologies and user functionalities that take pump performance to unprecedented levels. Intelligent TonesTM inform when attention is needed. A variable speed motor automatically adjusts for peak performance with improved suction lift. More compact, lighter, and less amp draw—it sets a new standard for efficiency.







12V Mobile DC Transfer Pumps For Gasoline / Diesel / B20 / E-15 / Kerosene / Mineral Spirits



FR4200 Series Heavy Duty

Flow 20 GPM (75 LPM)

1" inlet | 1" outlet 2" NPT or BSPT tank mount Cast iron pump housing

1/4 HP motor | 19 amp draw 30-minute duty cycle 8' suction lift, maximum





Included Accessories

12' hose | 18' 12-gauge 2-wire battery cable | 5' ground wire | Telescoping steel suction pipe 20" to 34 1/2" | 90° Street Elbow, Gal.

FR4204H	N	Pump only, ground wire, elbow *Accessories not included
FR4210H	N	Manual nozzle
FR4210HB	N	Ultra high flow automatic nozzle (truck stop spout)
FR4210HD	N	Automatic high flow nozzle (green cover)
FR4210HDS	N	Automatic high flow nozzle (green cover), 1" multiplane swivel
FR4211H	N	Manual nozzle, 901C gallon meter (Pictured below)
FR4211HL	N	Manual nozzle, 901CL liter meter
FR4219H	N	Manual nozzle, TT10AN meter
FR4210HBFQ	N	18' hose, Ultra high flow automatic nozzle (truck stop spout), 25' 10-gauge 2-wire battery cable with clamps, 30 micron particulate filter, Filter head with hardware
FR4210HARC	NA	Arctic 20' Hose, Automatic arctic nozzle (leaded spout/blue cover), 1" multiplane swivel

Included Accessories

3.6 m Hose | 5.5 m 3-wire battery cable | 1.5 m ground wire with clip | Telescoping steel suction pipe 51-88 cm

FR4205HE	В	Pump with 1" BSPP discharge, 1" BSPP suction port, 2" BSPT tank mount only *Accessories not included
FR4210HE	N	Manual nozzle
FR4210HEB	N	Ultra high flow automatic nozzle (truck stop spout)
FR4211HE	N	Manual nozzle, 901C gallon meter
FR4211HEL	N	Manual nozzle, 901CL liter meter
FR4211HEBL	N	Ultra high flow automatic nozzle (truck stop spout), 901CL liter meter



FR1200 Series Heavy Duty

Flow 15 **GPM** (57 **LPM**)

1" inlet | 3/4" outlet 2" NPT or BSPT tank mount Cast iron pump housing 1/4 HP motor | 20 amp draw 30-minute duty cycle 8' suction lift, maximum (diesel)



Included Accessories

12' hose | 18' 12-gauge 2-wire battery cable | 5' ground wire | Telescoping steel suction pipe 20" to 34 1/2" | 90° Street Elbow, Gal.

FR1204H	N	Pump, ground wire, elbow *Accessories not included
FR1210H	N	Manual nozzle (Pictured right)
FR1210HA	N	Automatic nozzle (unleaded spout/red cover)
FR1210HA1	N	Automatic nozzle (leaded spout/green cover)
FR1211H	N	Manual nozzle, 807C gallon meter
FR1211HL	N	Manual nozzle, 807C liter meter
FR1219H	N	Manual nozzle, TT10AN meter
FR1210HARC	NA	Arctic 15' Hose, Automatic arctic nozzle (leaded spout/blue cover), 3/4" multiplane swivel



Included Accessories

3.6 m Hose | 5.5 m 3-wire battery cable | 1.5 m ground wire with clip | Telescoping steel suction pipe 51-88 cm

FR1205HE	В	Pump with 3/4" BSPP discharge, 1" BSPP suction port, 2" BSPT tank mount only *Accessories not included
FR1210HE	N	Manual nozzle
FR1210HEA	N	Automatic nozzle (unleaded spout/red cover)
FR1211HE	N	Manual nozzle, 807C gallon meter
FR1211HEL	N	Manual nozzle, 807C liter meter (Pictured right)
FR1211HELA	N	Automatic nozzle (unleaded spout/red cover), 807C liter meter

SD1200 Series Standard Duty

Flow 13 GPM (49 LPM)

1" inlet | 3/4" outlet 2" NPT tank mount Cast iron pump housing 1/4 HP motor | 20 amp draw 30 minute duty cycle



Included Accessories

10' hose | 15' 12-gauge 2-wire battery cable | 5' ground wire | 2-piece suction pipe 15 1/4" to 29 1/4" | 90° Street Elbow, Gal.

SD1202H	N	Manual nozzle (Pictured right)
SD1202HA	N	Automatic nozzle (unleaded spout/red cover)





FR2400 Series Heavy Duty

1" inlet | 3/4" outlet 2" NPT or BSPT tank mount

Cast iron pump housing

1/4 HP motor | 10 amp draw 30-minute duty cycle 8' suction lift, maximum (diesel)





Included Accessories

Flow 15 GPM (57 LPM)

12' hose | 18' 12-gauge 2-wire battery cable | 5' ground wire | Telescoping steel suction pipe 20" to 34 1/2" | 90° Street Elbow, Gal.

FR2404H	N	Pump, ground wire, elbow *Accessories not included
FR2410H	N	Manual nozzle
FR2411H	N	Manual nozzle, 807C gallon meter (Pictured below)
FR2411HL	N	Manual nozzle, 807C liter meter

Included Accessories

3.6 m Hose | 5.5 m 3-wire battery cable | 1.5 m ground wire with clip | Telescoping steel suction pipe 51-88 cm

FR2405HE	В	Pump, ground wire, elbow, and cable only with 3/4" BSPP discharge, 1" BSPP suction port, 2" BSPT tank mount
FR2410HE	N	Manual nozzle
FR2410HEL	N	Manual nozzle, 807C liter meter
FR2410HEA	N	Automatic nozzle (unleaded spout/red cover)
FR2410HELA	N	Automatic nozzle (unleaded spout/red cover), 807C liter meter

FR4400 Series Heavy Duty

Flow 20 GPM (75 LPM)

1" inlet | 1" outlet 2" NPT or BSPT tank mount Cast iron pump housing

1/4 HP motor | 13 amp draw 30-minute duty cycle 8' suction lift, maximum (diesel)






Included Accessories

12' hose | 18' 12-gauge 2-wire battery cable | 5' ground wire | Telescoping steel suction pipe 20" to 34 1/2" | 90° Street Elbow, Gal.

FR4410H N Manual nozzle

Accessories


5.5 m 3-wire battery cable | 1.5 m ground wire with clip





12V Portable DC Transfer Pumps

For Gasoline / Diesel / B20 / E-15 / Kerosene

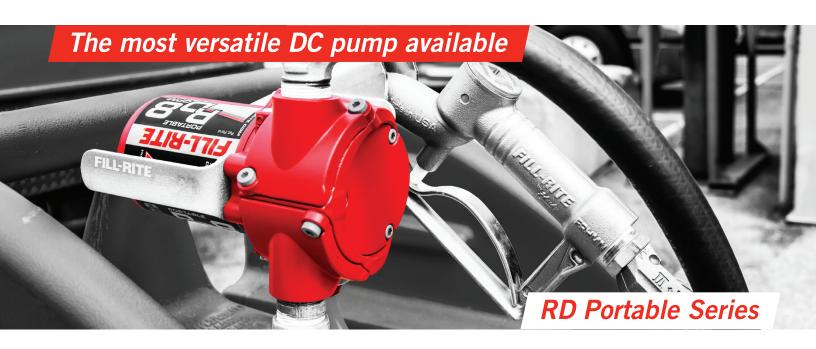



CONFIGURABLE FLANGES

Position the inlet and outlet hoses to fit your needs. Remove two bolts and rotate the flange.



QUICK CONNECT POWER CORD

Simple, quick and safe connection to your power source.



Pump weighs only 7 lbs.



Bung mount, foot mount,

or handheld; versatile enough to fit your application.



RD Portable Series Heavy Duty

Flow 12 GPM (45 LPM)

3/4" inlet | 3/4" outlet Multiple mounting options Aluminum construction

1/6 HP motor | 14 amp draw 30-minute duty cycle









Included Accessories

3/4" x 8' discharge hose | 6' suction hose | 10' quick connect power cord with battery clips

RD1212NN	N	Power cord and pump only *Accessories not included
RD1212NH	N	Manual nozzle (Pictured below)
RD1212NP	N	Manual nozzle, 23"-41" Telescoping suction tube, Nozzle boot, Bung mount tank adapter

Included Accessories

4.5 m quick connect power cord with battery clips

RD1212BN B Power cord and pump only *Accessories not included

Flow 8 GPM (30 LPM) 3/4" inlet | 3/4" outlet

Multiple mounting options Aluminum construction

1/6 HP motor | 14 amp draw 30-minute duty cycle

Included Accessories

5/8" x 8' discharge hose | 6' suction hose | 10' quick connect power cord with battery clips

RD812NN	N	Power cord and pump only *Accessories not included
RD812NH	N	Manual nozzle (Pictured right)
RD812NP	N	Manual nozzle, 23"-41" Telescoping suction tube, Nozzle boot, Bung mount tank adapter

Included Accessories

4.5 m quick connect power cord with battery clips

RD812BN B Power cord and pump only *Accessories not included

1600 Series Standard Duty

Compatible with Diesel fuels only

Flow 10 GPM (38 LPM)

3/4" inlet | 3/4" outlet Cast iron pump housing 1/5 HP motor | 17 amp draw 30-minute duty cycle



Included Accessories

6' 12-gauge 2-wire battery cable with clips and 30 amp fuse

FR1612	N	Pump Only *Accessories not included
FR1614	N	Plastic nozzle, 8' PVC suction and discharge hoses, Inlet strainer, 2 Hose barbs, 4 Hose clamps
FR1616	N	Plastic nozzle, 21"-38 1/2" Poly telescoping suction pipe, 8' Discharge PVC hose, 1 Hose barb, 2 Hose clamps

115V AC Fixed Transfer Pumps

For Gasoline / Diesel / B20 / E-15 / Kerosene



FR600 Series Heavy Duty

Flow 15 GPM (57 LPM)

1" inlet | 3/4" outlet 2" NPT or BSPT tank mount Cast iron pump housing 1/6 HP motor I 2 amp draw 30-minute duty cycle 6.5' suction lift (diesel)





Included Accessories

12' hose | Telescoping steel suction pipe 20" to 34 1/2" | 90° Street Elbow, Gal.

FR604H	N	Pump only with elbow *Accessories not included
FR610H	N	Manual nozzle

FR610HA // Automatic nozzle (unleaded spout/red cover) (Pictured right)



SD600 Series Standard Duty

Flow 13 GPM (49 LPM)

1" inlet | 3/4" outlet 2" NPT tank mount Cast iron pump housing

Included Accessories


12' hose | 3-piece suction pipe 15 1/4" to 43 1/4" | 90° Street Elbow, Gal.

SD602H N Manual nozzle



NEW! NX25-120/240

For Gasoline / Diesel / B20 / E-15 / Kerosene

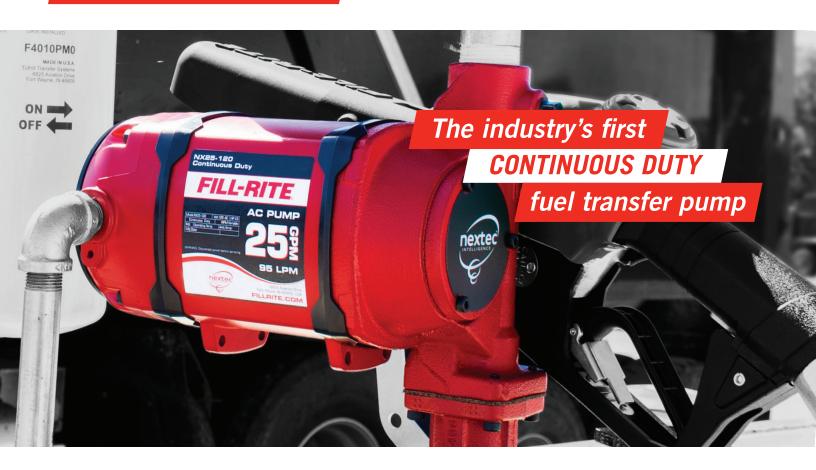

NX25-120/240 Series Continuous Duty

Flow 25 GPM (95 LPM)

1 1/4" inlet | 1" outlet

NPT or BSPT tank mount, or foot mount
Cast iron pump housing


1/3 HP motor | Rated to -40°F/-40°C Continuous duty for fuel transfer 3.5 amp draw | 14' lift (diesel)









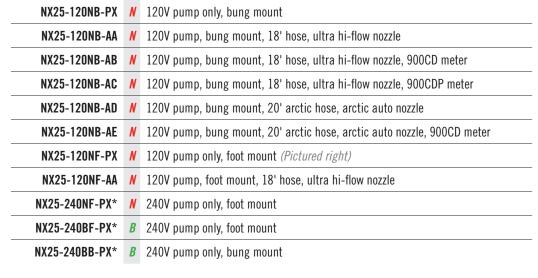





THE FUTURE OF FUEL TRANSFER IS HERE.

CONTINUOUS, ALL-DAY FUELING

CONTINUOUS DUTY -

Transfer fuel all day

TRUE 25 GPM - High flow fuel transfer rates at the nozzle

INTELLIGENT TONES - Indicate where attention is needed

VARIABLE SPEED MOTOR - Optimize performance and improve suction lift

LIGHTWEIGHT -

Hassle-free installation

AUTO POWER DOWN AFTER 20 MINUTES - Reduce energy costs

MAGNETIC SWITCH - Smooth operation and field replaceable

SLOW DOWN IN BYPASS -

Reduce energy consumption

REMOTE ON/OFF - Ideal for tall, above ground tanks

REDUCED VAPOR LOCK -

Keep running in harsh summer temperatures

nextec Intelligence® is an exclusive array of design advancements, technologies and user functionalities that take pump performance to unprecedented levels. Intelligent TonesTM inform when attention is needed. A variable speed motor automatically adjusts for peak performance with improved suction lift. More compact, lighter, and less amp draw—it sets a new standard for efficiency.





115/230V AC Fixed Transfer Pumps

For Diesel / B20 / Kerosene



FR300 Series Heavy Duty

Flow 35 GPM (132 LPM)

1 1/4" inlet | 1" outlet 2" NPT or BSPT tank mount Cast iron pump housing

3/4 HP motor | Anti-siphon ready 30-minute duty cycle 18' suction lift (diesel)







Included Accessories

2" bung adapter | Check valve | Pressure relief valve | Strainer | Elbow

FR300VN	N	Pump only *Accessories not included (20 GPM/75 LPM, 1/2 HP motor)
FR303V	N	For use with AST remote pumps (20 GPM/75 LPM, 1/2 HP motor)
FR310VARC	NA	20' arctic hose, Automatic arctic nozzle (unleaded spout/blue cover)
FR310VB	N	18' hose, Ultra high flow automatic nozzle (truck stop spout)
FR310VN	N	Pump only *Accessories not included
FR311VB	N	18' hose, Ultra high flow automatic nozzle (truck stop spout), 901C gallon mechanical meter
FR311VLB	N	18' hose, Ultra high flow automatic nozzle (truck stop spout), 901CL liter mechanical meter
FR311VN	N	Pump only with 901C gallon mechanical meter
FR311VLN	N	Pump only with 901CL liter mechanical meter
FR313V	N	For use with AST remote pumps (DIESEL ONLY SYSTEM)
FR319VB	N	18' hose, Ultra high flow automatic nozzle (truck stop spout), 900CD digital meter
FR319VBP	N	18' hose, Ultra high flow automatic nozzle (truck stop spout), 900CDP digital meter with integrated pulse output



Included Accessories

2" bung adapter | Check valve | Pressure relief valve | Strainer | Elbow

FR310VEN	N	Pump only *Accessories not included
FR311VELN	В	901CL liter mechanical meter
FR310VEMN	В	Pump only *Accessories not included
FR311VELMN	В	901CL liter mechanical meter

115/230V AC Fixed Transfer Pumps

For Gasoline / Diesel / B20 / E-15 / Kerosene

FR700 Series Heavy Duty

Flow 20 GPM (75 LPM)

1 1/4" inlet 2" NPT or BSPP tank mount Cast iron pump housing Anti-siphon ready 30-minute duty cycle 15' suction lift (diesel)








Included Accessories

2" bung adapter | Check valve | Pressure release valve | Strainer | Elbow

FR700V	N	115V AC power, 3/4" outlet, Manual nozzle, 12' hose
FR701V	N	115V AC power, 3/4" outlet, Manual nozzle, 807C gallon mechanical meter, 12' hose (Pictured below)
FR701VL	N	115V AC power, 3/4" outlet, Manual nozzle, 807CL liter mechanical meter, 12' hose
FR710VB	N	115V AC power, 1" outlet, Ultra high flow automatic nozzle (truck stop spout)
FR710VN	N	115V AC power, 1" outlet, *Accessories not included
FR711VA	N	115V AC power, 1" outlet, Ultra high flow automatic nozzle (truck stop spout), 901C gallon mechanical meter, 18' hose
FR711VLA	N	115V AC power, 1" outlet, Ultra high flow automatic nozzle (truck stop spout), 901CL liter mechanical meter, 18' hose
FR711VBD	N	115V AC power, 1" outlet, Ultra high flow automatic nozzle (truck stop spout), 900CD digital meter
FR713V	N	115V AC power, for use with AST remote dispensers

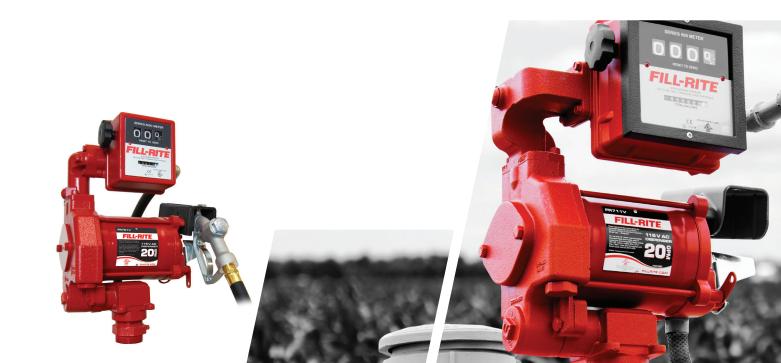




NEW! Fuel Management System

fillrite.com/fms

FUEL MANAGEMENT SYSTEM

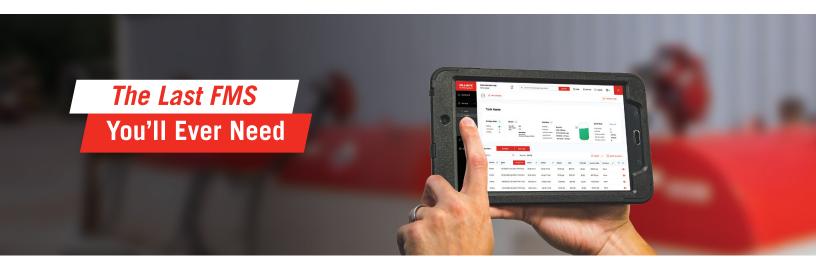



Low cost, full featured | Constant connectivity Easy, modular installation

Small footprint, big functionality 2-year warranty



Fill-Rite FMS hardware is compatible with most existing fuel pumps and meters. Installation is quick and simple and designed to scale with your business needs.

NXFM100	Site controller
NXFM150	5 hose expansion module



Accessories

NXFMPED	Full Pedestal Assembly, FMS; includes FMXENC, FMIPAD, FMSIPADCS, FMPED
FMXENC	Extreme Temp Tablet Enclosure
FMIPAD	Standard Apple iPad with 32GB Memory and Cellular Ready
FMSIPADCS	Protective iPad Case
FMPED	Pedestal Only

Extended Antennas

FMSANT05	2.4GHz 5dB Wi-Fi Antenna; SMA with SMA to uFL Adapter, 5 ft. Cable
FMSANT15	2.4GHz 5dB Wi-Fi Antenna; SMA with SMA to uFL Adapter, 15 ft. Cable
FMSANT35	2.4GHz 5dB Wi-Fi Antenna; SMA with SMA to uFL Adapter, 35 ft. Cable





DOWNLOAD THE FREE "FILL-RITE FMS" APP NOW! Try the demo to see just how easy full featured fuel management can be!





Hand Pumps

For Gasoline / Diesel / B20 / E-15 / Kerosene

Piston Hand Pumps

20 Gallons/100 Strokes

1" inlet | 3/4" outlet 2" NPT bung mount Cast aluminum housing 47" suction lift (diesel)





Included Accessories

Vacuum breaker | Telescoping steel suction pipe 20" to 34 1/2"

FR150	N	Pump only w/ vacuum breaker *Accessories not included
FR151	N	Pail spout
FR152	N	Nozzle spout, 8' hose (Pictured right)
FR156	N	807C gallon meter, Nozzle spout, 8' hose



11 Ounces/1 Stroke

1" inlet | Spout outlet 2" NPT bung mount

Included Accessories | Fluid Compatibility | Materials of Construction

FR20V	N	Polypropylene telescoping suction pipe 19 3/4" to 35 1/2" Light oils, anti-freeze, coolant, hydraulic oils Polypropylene housing
SD11	N	Pail spout, No drip valve, Telescoping steel suction pipe 20" to 34 1/2" Light oils, antifreeze, hydraulic fluid, diesel, kerosene
		Steel housing

Rotary Hand Pumps

10 Gallons/100 Revolutions

1" inlet | 3/4" outlet 2" NPT bung mount

Cast aluminum housing 47" suction lift (diesel)





Included Accessories

Vacuum breaker | Telescoping steel suction pipe 20" to 34 1/2"

FR110	N	Pump only w/ vacuum breaker *Accessories not included
FR112	N	Nozzle spout, 8' hose
FR112C	N	Gallon counter, Nozzle spout, 8' hose
FR112CL	N	Liter counter, Nozzle spout, 8' hose
FR113	N	Pail spout

7.5 Gallon/100 Strokes

3/4" inlet | Spout outlet 2" NPT bung mount

Cast iron housing



Included Accessories

Compatible with diesel, kerosene, machine oil, fuel oil, petroleum products

SD62 N Pail spout, 3-piece steel suction pipe 13" to 39" (Pictured right)





In-line Digital Turbine Meter For Gasoline / Diesel / Kerosene / Mineral Spirits



TT10 Series In-line Digital Turbine Meters

Flow 2-35 GPM (8-132 LPM)

+/-1% accuracy 1" inlet | 1" outlet NPT or BSPP threads Impact damage resistance User replaceable batteries (2 AA)
Easy field calibration | Memory backup
Install in-line, hose-end, or at the pump










Included Accessories | Additional Compatible Fluids | Materials of Construction









Digital Display Meters

For Gasoline / Diesel / Biodiesel / E15 / Kerosene / Heptanes / Stoddard Solvents / Mineral Spirits

900 Series Digital Meters

Flow 6-40 GPM (23-151 LPM)

+/-1.25% accuracy rating
1" | 1.5" inlet/outlet - NPT or BSPT threads
Memory backup in case of power failure

Field/factory calibration 90° movable electronic head Powered by 2 AA batteries









Included Accessories | Inlet/Outlet Size

900CD	N	1" inlet/outlet (Pictured below right)
900CD1.5	N	1.5" inlet/outlet
900CDBSPT	В	1" inlet/outlet
900CD1.5BSPT	В	1.5" inlet/outlet
900CDP	N	Intrinsically safe barrier, pulse output 1" inlet/outlet (Pictured below left)
900CDPBSPT	В	Intrinsically safe barrier, pulse output 1" inlet/outlet
900CDP1.5	N	Intrinsically safe barrier, pulse output 1.5" inlet/outlet
900CDP1.5BSPT	В	Intrinsically safe barrier, pulse output 1.5" inlet/outlet
900CDPX	N	Pulse output 1" inlet/outlet (Not for explosive atmospheres)
900CDPX1.5	N	Pulse output 1.5" inlet/outlet (Not for explosive atmospheres)
900CDPXBSPT	В	Pulse output 1" inlet/outlet (Not for explosive atmospheres)
900CDPX1.5BSPT	N	Pulse output 1.5" inlet/outlet (Not for explosive atmospheres)





820 Series Nutating Disc Meter

Compatible with Water, Diesel, and Mild Chemicals

Flow 2-20 GPM (8-75 LPM)

+/-0.5% accuracy rating 1" NPT inlet/outlet Factory/field calibration Powered by 2 AA batteries DEF Compatible





FILL-RITE. Mechanical Meters For Gasoline / Diesel / B20 / E15 / Kerosene

4-Wheel Mechanical Meters

Flow 6-40 GPM - Gallon register

+/-2% accuracy rating Aluminum construction







Included Accessories | Inlet/Outlet Size

901C	N	1" inlet/outlet
901C1.5	N	1.5" inlet/outlet
901CMK300	N	Includes fittings and castings to mount on FR300 series pumps 1" inlet/outlet
901CMK300V	N	Includes fittings and castings to mount on FR300V and FR700V series pumps 1" inlet/outlet (Pictured above)
901CMK4200	N	Includes fittings and castings to mount on FR4200 and FR710 series pumps 1" inlet/outlet
901CN1.5	N	Flourocarbon seals 1.5" inlet/outlet (Nickel-plated meter also compatible with biofuels)

Flow 23-151 LPM - Liter register

+/-2% accuracy rating Aluminum construction



901CL 901CLX418	N B	1" inlet/outlet
901CL1.5 901CL1.5X418	N B	1.5" inlet/outlet (Pictured above)
901CLMK300	N	Includes fittings and castings to mount on FR300 series pumps 1" inlet/outlet
901CLMK300V	N	Includes fittings and castings to mount on FR300V and FR700V series pumps 1" inlet/outlet
901CLMK4200	N	Includes fittings and castings to mount on FR4200 and FR710 series pumps 1" inlet/outlet
901CLN1.5	N	Flourocarbon seals 1.5" inlet/outlet (Nickel-plated meter also compatible with biofuels)
901CNL1.5X418	В	1.5" inlet/outlet (Nickel-plated meter also compatible with biofuels)

3-Wheel Mechanical Meters

Flow 5-20 GPM - Gallon register

+/-1% accuracy rating Aluminum construction







Included Accessories | Inlet/Outlet Size

806C	N	1" inlet/outlet (Gravity feed model Pictured above)
807C	N	3/4" inlet/outlet
807C1	N	1" inlet/outlet
807CMK	N	Includes fittings to mount on FR1200, FR2400, FR600, SD600, SD1200, and FR700V series pumps 3/4" inlet/outlet
807CN1	N	1" inlet/outlet (Nickel-plated meter also compatible with biofuels)

3-Wheel Mechanical Meters continued

Flow 19-75 LPM - Liter register

+/-1% accuracy rating Aluminum construction



806CL	N	1" inlet/outlet (Gravity feed model)
807CL 807CLX418	N B	3/4" inlet/outlet
807CL1 807CL1X418	N B	1" inlet/outlet
807CLMK	N	Includes fittings to mount on FR1200, FR2400, FR600, SD600, SD1200, and FR700V series pumps 3/4" inlet/outlet
807CLN1	N	1" inlet/outlet (Nickel-plated meter also compatible with biofuels Pictured above)
807CNL1X418	В	1" inlet/outlet (Nickel-plated meter also compatible with biofuels)

TN Series Meters

Fluid compatibility varies per model

Œ

Flow 0.5-15 GPM (1.5-57 LPM)

+/-2% accuracy rating

1" | 1.5" NPT or BSPP inlet/outlet

TN740 - Max pressure 1,000 PSI / 69 bar TN760 - Max pressure 400 PSI / 28 bar

Fluid Register | Flow Rate | Inlet/Outlet Size

For use with high viscosity lube oils

TN740AN1CAA1LAI	N	N Liter register 1.5-40 LPM 1" inlet/outlet		
TN740AN1CAA1TAI	N	Gallon register 0.5-10 GPM 1" inlet/outlet		
TN740AN1CBA1LAI	В	Liter register 1.5-40 LPM 1" inlet/outlet		
TN760AN1CAB1GAF	N	Gallon register 0.6-15 GPM 1.5" inlet/outlet (Pictured right)		
TN760AN1CAB1LAF	N760AN1CAB1LAF // Liter register 2.3-57 LPM 1.5" inlet/outlet			
TN760AN1CBB1LAF	В	Liter register 2.3-57 LPM 1.5" inlet/outlet		



Flow 6-60 GPM (23-230 LPM)

+/-2% accuracy rating
1.5" NPT or BSPP inlet/outlet

Max pressure 150 PSI / 10 bar

Fluid Register | Compatible Fluids

TN860AN1CAB1GAC	N	Gallon register Diesel, biodiesel, jet fuel, kerosene			
TN860AN1CAB1GAC-RL	N	Gallon register Diesel, biodiesel, jet fuel, kerosene (right-to-left flow)			
TN860AN1CAB1LAC	N	Liter register Diesel, biodiesel, jet fuel, kerosene			
TN860AN1CAB2GAC	N	Gallon register Gasoline, water			
TN860AN1CAB2GBC	N	Gallon register E85, E100, ALS, solvents			
TN860AN1CAB2LAC	N	Liter register I Gasoline, water			
TN860AN1CAB2LBC	N	Liter register E85, E100, ALS, solvents			
TN860AN1CBB1LAC	В	Liter regsiter Diesel, biodiesel, jet fuel, kerosene			
TN860AN1CBB2LAC	В	Liter register Gasoline, water			
TN860AN1CBB2LBC	B Liter register E85, E100, ALS, solvents				







Viton seals and O-rings Integral hanging hook 50 PSI I 3.4 bar Rated to -20°F/-28°C Available in 1" and 3/4" NPT



1" Ultra High Flow Automatic Nozzles

Compatible with gasoline, diesel, E15, biodiesel to B20, and kerosene

N100DAU13	N	Red cover 5-40 GPM (19-150 LPM) (Pictured right)
N100DAU13G	N	Green cover 5-40 GPM (19-150 LPM) (Pictured right)
N100DAU13Y	N	Yellow cover 5-40 GPM (19-150 LPM) (Pictured right)

Automatic Nozzles

Compatible with gasoline, diesel, E15, biodiesel to B20, and kerosene

N100DAU12	N	1" Red cover 5-25 GPM (19-95 LPM)				
N100DAU12G	1" Green cover 5-25 GPM (19-95 LPM)					
FRNA100DAU00	NA	1" Blue cover 5-25 GPM (19-95 LPM) (Rated to -40°F/-40°C)				
N075DAU10	N	3/4" Green cover 2.5-14.5 GPM (9.5-55 LPM)				
N075UAU10	N	3/4" Red cover 2.5-14.5 GPM (9.5-55 LPM)				
FRNA075DAU10	NA	3/4" Blue cover 2.5-14.5 GPM (9.5-55 LPM) (Rated to -40°F/-40°C)				



Manual Nozzles

Compatible with gasoline and diesel

FRHMN100S	N	1" Up to 20 GPM (75 LPM)	
FRHMN075S	N	3/4" Up to 20 GPM (75 LPM)	

Multi-plane Swivels

360° rotation | Rated to -40°F/-40°C

S100H1315	N	1"
S075H1314	N	3/4"



Whip Hoses

Resistant to cuts, abrasions, & weather

WH10012	N	1" x 12" 1" x 30.5 cm
WH07509	N	3/4" x 9" 3/4" x 22.9 cm



Vent Caps

FRTC	N	Cap only
FRTCB	N	Cap w/ 2" (5 cm) base

Breakaways

Non-reconnectable | Instant closing poppet check valve

B100F475	N	1"
B075F350	N	3/4"

Suction Pipes

Telescoping suction pipes available in metallic and non-metallic

1200KTG9099	N	Steel 1" x 20" to 34 1/2" 1" x 50.8 cm - 87.6 cm
30F1879	N	Polypropylene 1/2" x 21" to 36" 1/2" x 53.3 cm - 91.4 cm

Accessories

For Gasoline / Diesel / B20 / E-15 / Kerosene

Filter

F4030PM0

F4010PM0

F1810PM0

F1810PM1

F1810HM0

F1810PC1

F1810HC1

1210KTF7019

1200KTF7018

1200R0631 1200R9146

KIT300FA

Particulate, Hydrosorb® & Aqua Increase pump longevity

Particulate Up to 40 GPM (151 LPM) 50 PSI (3.4 bar) 30 Micron

Particulate Up to 40 GPM (151 LPM) 50 PSI (3.4 bar) 10 Micron

Particulate | Up to 18 GPM (68 LPM) | 50 PSI (3.4 bar) | 10 Micron

Hydrosorb | Up to 18 GPM (68 LPM) | 50 PSI (3.4 bar) | 10 Micron

N F1810HM0 filter w/ 1200KTG9075 filter head kit

F1810PM0 filter w/ 1200KTG9075 filter head kitHydrosorb for use with F1810HC1 clear bowl filter

N F4030PM0 filter w/ 700ACC7017 filter head kit

Particulate for use with F1810PC1 clear bowl filter

Particulate w/ drain | Up to 18 GPM (68 LPM) | 50 PSI (3.4 bar) | 10 Micron

Particulate w/ drain | Up to 18 GPM (68 LPM) | 50 PSI (3.4 bar) | 10 Micron

Agua w/ drain | Up to 18 GP M (68 LPM) | 50 PSI (3.4 bar) | 10 Micron

Available in 1" and 3/4" NPT
Suitable for all electric pumps

Compatible with gasoline and diesel



700ACCF7017	N	1"
1200KTG9075	N	3/4"



Internal spring guard
Stainless steel ground wire

Fuel-resistant Neoprene exterior Suitable for all electric pumps Available in 1" and 3/4" NPT


1" Models

FRH10012	N	12' 3.6 m
FRH10014	N	14' 4.3 m
FRH10020	N	20' 6 m
FRHA10020	NA	20' 6 m (Rated to -40°F/-40°C)

3/4" Models

FRH07512	N	12' 3.6 m (Pictured below)
FRH07514	N	14' 4.3 m
FRH07520	N	20' 6 m
FRHA07515	NA	15' 4.6 m (Rated to -40°F/-40°C)

UL listed Models







FILL-RITE. 115/230V AC Cabinet Systems For Gasoline / Diesel / B20 / E-15 / Kerosene

Cabinet Pump Systems

Flow 15 GPM (57 LPM)

1 1/4" inlet | 3/4" outlet 2" NPT or BSPT tank mount Cast iron pump housing

1/3 HP Motor 30-minute duty cycle Anti-siphon ready



Included Accessories

Nozzle boot | Nozzle retainer

FR702VR	N	115V AC, 60 Hz, Manual nozzle, 12' hose, 807C gallon meter
FR702VRU	N	115V AC, 60 Hz, 807C gallon meter (Pictured right)
FR702VRGU	N	220V AC, 50/60 Hz, 807C gallon meter
FR702VLRU	N	115V AC, 60 Hz, 807CL liter meter
FR702VELRU	В	220V AC, 50 Hz, 807CL liter meter
FRPA125		Pedestal kit, Fits FR702 Series and FR700 Series pumps

Cabinet Meter Systems

Flow 40 GPM (151 LPM)

1" inlet | 1" outlet Built-in junction box Cast iron pump housing

For use with 300 of 700 remote pumps Can be used with submersible pumps



*Non-UL

Included Accessories

FR902CR*	N	901C gallon meter
FR902CLR*	N	901CL liter meter (Pictured right)
FR902CRU	N	115V AC solenoid valve, 901C gallon meter
FR902CLRU	N	115V AC solenoid valve, 901CL liter meter

Cabinet Pedestal Systems

Flow varies per system

50 psi / 3.4 bar 1" outlet

Cast iron pump housing





Included Accessories Nozzle boot | Nozzle retainer

FR902DPU / 40 GPM (151 LPM), 900CDP digital meter, 115V AC solenoid valve, Hammer arrestor (*Pictured above*) FR302DPU / 26 GPM (98 LPM), 900CDP digital meter, 300 series pump, Hammer arrestor (DIESEL ONLY SYSTEM)

FR102PHU N 115V AC solenoid valve



NEW! DEF Pump SystemsFor Diesel Exhaust Fluid (DEF) /

AdBlue® / Water



DF Series - DEF Transfer Systems

Flow 8 GPM (30 LPM)

1" BSPP x 3/4" Hose barb 12V DC or 120V AC systems EPDM seals | Self-priming to 6' 30-minute duty cycle 38 psi / 2.6 bar max bypass 2-year warranty

12V DC | Included Accessories

1" x 3/4" Hose barb elbows | 1" x 3/4" Hose barb straight fittings | Worm gear hose clamps

DF012N	H	No additional accessories			
DF012CMN520	Н	Cage IBC bracket, manual nozzle, nozzle boot, 5' suction hose, 20' discharge hose			
DF012CAN520	Н	Cage IBC bracket, automatic nozzle, nozzle boot, 5' suction hose, 20' discharge hose Cage IBC bracket, automatic nozzle, nozzle boot, RPV dispense coupler, 5' suction hose, 20' discharge hose			
DF012CAN520-RP	Н				
DF012CAT520	Н	Cage IBC bracket, TT10PB meter, automatic nozzle, nozzle boot, RPV dispense coupler, 5' suction hose, 20' discharge hose			
DF012CAT520B	H	Cage IBC bracket, TT10PB meter, automatic nozzle, nozzle boot, RPV dispense coupler, 5' suction hose, 20' discharge hose, TT10			
		meter			

120V AC | Included Accessories

1" x 3/4" Hose barb elbows | 1" x 3/4" Hose barb straight fittings | Worm gear hose clamps

DF120N	Н	No additional accessories		
DF120CMN520	Н	Cage IBC bracket, manual nozzle, nozzle boot, 5' suction hose, 20' discharge hose		
DF120DAN520	Н	Drum bracket, automatic nozzle, nozzle boot, 5' suction hose, 20' discharge hose		
DF120CAN520	Н	Cage IBC bracket, automatic nozzle, nozzle boot, 5' suction hose, 20' discharge hose		
DF120CAN520-RP	Н	Cage IBC bracket, automatic nozzle, nozzle boot, RPV dispense coupler, 5' suction hose, 20' discharge hose		
DF120CAT520	Н	Cage IBC bracket, TT10PB meter, automatic nozzle, nozzle boot, RPV dispense coupler, 5' suction hose, 20' discharge hose		
DF120CAT520B	Н	Cage IBC bracket, TT10PB meter, automatic nozzle, nozzle boot, RPV dispense coupler, 5' suction hose, 20' discharge hose, TT10 meter		





400B Series Diaphragm Pumps

Flow 15 GPM (57 LPM)

1" inlet | 1" outlet NPT threads Santoprene diaphragms® | EPDM seals 15 psi / 1 bar

10' suction lift *Hytrel diaphragms | Viton seals

12V DC | Included Accessories

12' EPDM discharge hose | Ball valve | Hose barbs | Hose clamps

SS411BCEXP	В	Pump only *Accessories not included (CE compliant, Explosion-proof motor)	
SS413BCEXPPG	N	2" F Camlock coupler w/F threads, 2" x 1" reducer bushing, 39" EPDM hose (CE compliant, Explosion-proof motor)	
SS415B	N	Pump only *Accessories not included	
SS415BX670	N	Pump only *Accessories not included	
SS415BEXPX670	N	Pump only *Accessories not included (UL listed explosion-proof motor)	
SS415BX731	N	Bracket on pump, *Accessories not included	
SS415BX731PG	N	Bracket on pump, 2" F Camlock coupler w/F threads, 2" x 1" reducer bushing, 23"-40" poly telescoping suction tube	
SS417B	N	Cap and spin-on collar for bung, 23"-40" poly telescoping suction tube	
*SS419BX665	N	2" poly street elbow, Monsanto coupler, 23"-40" poly telescoping suction tube, pump support bracket (for use with Monsanto tanks)	
SS420B	N	Nozzle hanger, 23"-40" poly telescoping suction tube	
SS425B	N	W/ IBC Bracket and mounting hardware	
SS435B	N	Short frame Chemtraveller, 825 meter, 9' EPDM suction hose, anti-drip tip, 1" F Camlock coupler w/M threads, 1" poly short nipple	
SS435BCEXP	N	Short frame Chemtraveller, 825 meter, 9' EPDM suction hose, anti-drip tip, 1" F Camlock coupler w/M threads, 1" poly short nipple (CE compliant, Explosion-proof motor)	
SS435BX675	N	Short frame Chemtraveller, 850 meter, 9' EPDM suction hose, anti-drip tip, 1" F Camlock coupler w/F threads, 1" poly short nipple	
SS435BX700	N	Short frame Chemtraveller, 825 meter, 9' EPDM suction hose, anti-drip tip, 1" F Camlock coupler w/M threads, 1" poly short nipple (Gaskets and seals are EPDM)	
SS435BX713	N	Short frame Chemtraveller, 9' EPDM suction hose, anti-drip tip (Includes fittings to pump from the top or bottom of a tank or tote)	

400B Series Continued

12V DC | Included Accessories

12' EPDM discharge hose | Ball valve | Hose barbs | Hose clamps

SS435BEXPX703	N	Short frame Chemtraveller, anti-drip tip, no hoses or hose clamps included (UL listed explosion-proof motor) 9" GemCap, 825 meter, 28.5"-45.5" poly telescoping suction tube w/ bellows, check valve, built-in recirculation valve		
SS445B	N			
SS445BX700	N	9" GemCap, 825 meter, 28.5"-45.5" poly telescoping suction tube w/ bellows, check valve, built-in recirculation valve (Gaskets and seals are EPDM)		
SS445BX727	N	9" GemCap, 825 meter, 28.5"-45.5" poly telescoping suction tube w/ bellows, check valve, built-in recirculation valve		

115V AC | Included Accessories

12' EPDM discharge hose | Ball valve | Hose barbs | Hose clamps

SS460B	N	ozzle hanger, 23"-40" poly telescoping suction tube		
SS460BX674	N	ozzle hanger, 23"-40" poly telescoping suction tube		
SS460BX731	N	acket on pump, nozzle hanger, 23"-40" poly telescoping suction tube		
SS460BX731PG	N	racket on pump, 2" F Camlock coupler w/F threads, 39" EPDM hose, 23"-40" poly telescoping suction tube,		
SS465BEXP	N	Tall frame Chemtraveller, 825 meter, 9' EPDM suction hose, anti-drip tip, 1" F Camlock coupler w/M threads, 1" poly nipple (UL listed explosion-proof motor)		
SS465BX713	N	Tall frame Chemtraveller, anti-drip tip, no hoses or hose clamps included		
SS470B	N	W/ IBC Bracket and mounting hardware		

Electric Diaphragm Pumps

Compatible with Diesel / Gear & Motor Oils

Flow 15 GPM (57 LPM)

1" inlet | 1" outlet NPT threads 15 psi / 1 bar Hytrel diaphragms | NBR seals 10' suction lift

Included Accessories


12' hose | 23"-40.5" steel telescoping suction pipe

FR405BEXPX054	N	12V DC I *Accessories not included (UL listed explosion-proof motor)
FR410B	N	12V DC Manual nozzle
FR410BEXP	N	12V DC Manual nozzle
FR450B	N	115V AC I Manual nozzle (Pictured right)
FR450B	N	115V AC Manual nozzle (Pictured right)

24V DC | Included Accessories

FR205B	N	Pump only *Accessories not included
FR205BX054	N	Pump only *Accessories not included
FR210B	N	12' hose, manual nozzle, 23"-40.5" steel telescoping suction pipe



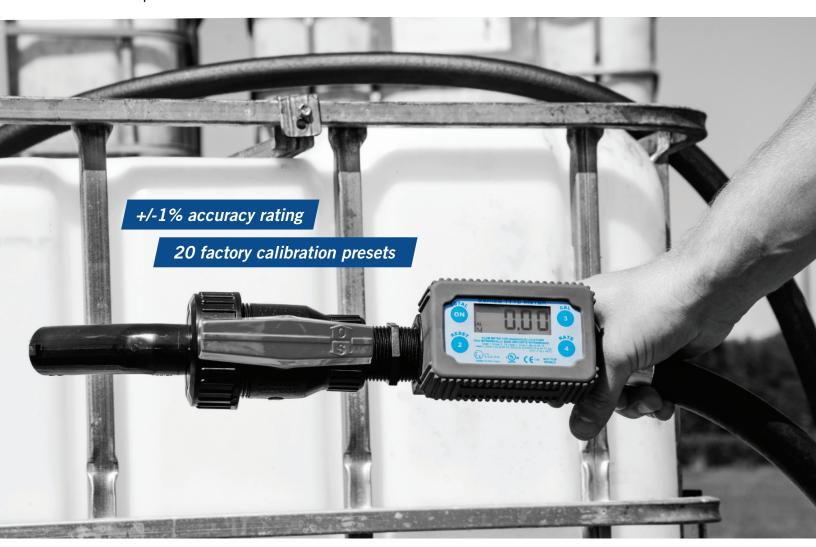



In-line Digital Turbine Meter

For DEF / AdBlue / Anti-freeze / De-icing Fluid / Non-Potable Water / Chemicals

TT10 Series In-line Digital Turbine Meters

Flow 2-35 GPM (8-132 LPM)

+/-1% accuracy rating 1" inlet | 1" outlet NPT or BSPP threads Impact damage resistance

User replaceable batteries (2 AA) Easy field calibration | Memory backup Install in-line, hose-end, or at the pump









TT10PN N Engineered polymer meter only **TT10PB B** Engineered polymer meter only





800 Series Digital Meters For Pesticides / Fertilizers / Diesel / DEF / AdBlue /

For Pesticides / Fertilizers / Diesel / DEF / AdBlue / Crop, Gear & Motor Oils / Mild Acids / Soaps / Water

Flow 2-20 GPM (7-75 LPM)

+/-0.5% accuracy rating 1" inlet | 1" outlet NPT or BSPP threads 1-step calibration Glass-filled polypropylene housing Waterproof, corrosion resistant body 3/4" BSPP threads



Included Accessories | Max Pressure

825	N	Meter only 125 PSI (8.6 bar) (2) AA battery powered
825X700	N	Meter only, EPDM seals 125 PSI (8.6 bar) (2) AA battery powered
825D075BSPPS	В	3/4" BSPP threads 125 PSI (8.6 bar) (2) AA battery powered
825P	N	4-20 mA analog output, Pulse output, Power and signal cable 125 PSI (8.6 bar) (2) Lithium CR2032 batteries
850	N	Meter only 120 PSI (8.27 bar) (2) AA battery powered
850P	N	4-20 mA analog output, Pulse output, Power and signal cable 120 PSI (8.27 bar) (2) Lithium CR2032 batteries (Pictured below)

Series 850P (Bulk Air Detector Model)


The 850 series meter offers all the great features of the 825, but also incorporates a mass air sensor that distinguishes between fluid and air. As a result, the 850 stops metering when you finish emptying a container, improving the accuracy by not metering the air. The "P" designation in the model number tells you this meter has pulse output, making it an excellent choice for batching, use with FMS and PLC systems, and remote monitoring.





Hand Pumps

For Hydraulic, Engine, & Gear Oils / Diesel / Anti-Freeze / Mild Acids / DEF / AdBlue / Degreasers

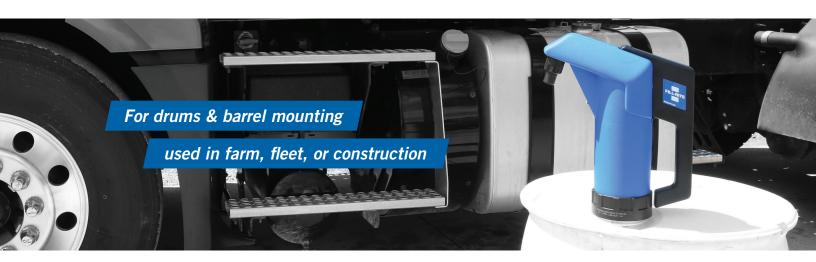

Air Operated Hand Pump

Flow 6.5 GPM (24.6 LPM)

2" NPT bung adapter 100 psi / 6.8 bar max pressure

FRAP32V N Telescoping suction pipe

Hand Lever Pump

Flow 11oz/stroke

2" NPT bung adapter Polypropylene construction

FRHP32V N Telescoping suction pipe

Accessories

For Hydraulic, Engine, & Gear Oils / Diesel / Anti-Freeze / Mild Acids / DEF / AdBlue / Degreasers

Mounting Options

Stainless steel For totes, drums, and barrels

KITDFCB	Cage IBC bracket, nozzle reservoir w/bracket
KITDFDB	Drum bracket (Pictured below), nozzle reservoir w/bracket
KIT180MPPS	IBC mounting plate





Accessories continued

Nozzles

Stainless steel or Non-metallic construction

FRDFM075C	H	DEF manual nozzle
FRDFA075B	Н	DEF automatic nozzle
FRDFA075A	В	Premium DEF automatic nozzle (Stainless steel)
KITDFMN	Н	DEF automatic nozzle with TT10PB meter assembly

Suction Pipes

30F1879	N	1/2" x 23"-40 1/2" telescoping poly suction pipe
1200KTG7743	N	1" x 43" 3-piece PVC suction pipe
KIT180DTPS	Н	Non-metallic dispense coupler and suction tube - 3/4" hose barb

Hoses

EPDM material 3/4" Bare ends

KITDFH05 5' I

5' | 1.5 m (Suction hose)

KITDFH20 20' | 6 m



Accessories to accompany chemical dispensing systems

KITS05NDEF	Poly manual nozzle w/stainless steel spout, 8' 2.4 m hose, 6' 1.8 m suction hose
KIT180MAPS	Automatic nozzle, 12' 3.6 m hose, 6' 1.8 m suction hose, stainless steel mounting plate
KIT180MAMPS	825 digital meter, automatic nozzle, 12' 3.6 m hose, 6' 1.8 m suction hose, stainless steel IBC tote mounting plate
KITHA32V	8' 2.4 m hose w/ball valve tap
KITHA32VMN	8' 2.4 m hose, polypropylene manual nozzle w/stainless steel spout, hose bracket
KITDFNB	Plastic nozzle reservoir, nozzle reservoir bracket
MMNM075RPV	Non-metallic, 4-pin RPV dispense coupler
MMSS075RSV	Stainless steel 4-pin RSV dispense coupler
MMSS075EPV	Stainless steel 3-pin EPV dispense coupler







FRCatalog-1118-Rev.7

